


## RINGS &amp; BASES INDEX

Fitting & Custom Components.....	282	Rifle.....	263-282
Handgun.....	262-263	Shotgun.....	263

## WEIGAND COMBAT HANDGUN SCOPEMOUNTS®

**TAURUS TRACKER SCOPE MOUNT** - Precision-machined, aluminum scope mount accepts Weaver-style rings to let you mount a scope on your Taurus Tracker. Also great for red-dot optics. Integral recoil lug fits into rear sight notch for a rock solid hold that prevents scope movement. Requires removing rear sight. No drilling or tapping required.   
**SPECS:** Aluminum, silver, matte finish. 4 1/2" (11.4cm) long, 3/16" (7.8mm) high from bottom to top of mount. 1.3 oz. (36.8g) weight. Includes mounting screws. Fits .22 LR, .22 Mag, .17 HMR.  
**#957-000-076 Tracker Scope Mount, 7E32P29..... \$33.99**


**WEIG-A-TINNY MOUNT FOR RUGER® REVOLVERS** - Remove the rear sight and install this versatile Weig-A-Tinny® scope mount in a few minutes. Uses existing rear sight elevation screw hole and sight spring pocket for mounting. Accepts all Weaver-style attaching points and Picatinny accessories. Oversize recoil lug prevents the scope mount from shifting even when shooting full-house magnum loads. Only 2 1/2" long and weighs 1 oz. Attaching screws are supplied, mounting screw is 6-48 thread, set screw is 8-32. Fits many Ruger revolvers with adjustable sights, EXCEPT SP-101, Super Redhawk, and Blackhawk Flattop. Will not fit flush in the front on Blackhawk, New Model Super Blackhawk, Single Six, GP-100 in .22 LR only. 

**#957-000-082 WEIG-A-TINNY Mini Revolver Scope Mount For Ruger, Black, 6B34G50..... \$33.99**  
**#957-000-081 WEIG-A-TINNY Mini Revolver Scope Mount For Ruger, Silver, 6B34G50..... 33.99**


**REDHAWK 6" & 7 1/2" BARREL** - Strong, lightweight mounts available for Ruger Redhawk models with 6" or 7 1/2" barrels. Remove rear sight for installation, no drilling or tapping required. Uses a front sight replacement block for attachment at the muzzle end and the rear sight elevation hole for attachment at the back of the top strap. Rear sight notch becomes a rock-solid recoil lug for consistent accuracy. Eight cross-slots allow you to position your optics for optimum eye relief. Accepts Weaver-style rings or mounting systems.   
**SPECS:** 6063 T6 aluminum, matte silver anodized finish. 6" Bbl. - 7 1/2" (20.1cm) long x 1 1/2" (2cm) wide. 3.1 oz. (87g) wt. 7 1/2" Bbl. - 10" (25.4cm) long x 1 1/2" wide. 4 oz. (113g) wt. Includes mounting screws.

**#957-000-071 Redhawk 6" Bbl. Mount, Silver, 7E55C09..... \$57.99**  
**#957-000-073 Redhawk 7 1/2" Barrel Mount, Silver, 7E60P29..... 66.99**

**REDHAWK/BLACKHAWK** - Drill and tap mount attaches the scope to your Ruger's top strap. Fits Ruger® Redhawk®, Blackhawk® and Super Blackhawk®. Accepts Weaver-style rings.   
**SPECS:** Extruded aluminum, silver or black, anodized, matte finish. 4 1/2" (11cm) long, 7/8" (22mm) wide, 1.3 oz. (38 g) wt. Includes mounting screws. Requires drilling and tapping.  
**#957-124-100 Black Ruger Mount, 7E32N39..... \$35.99**  
**#957-124-101 Silver Ruger Mount, 7E31D49..... 34.99**


**REDHAWK/BLACKHAWK HUNTER** - No-drill, no-tap mount fits Redhawk and Blackhawk Hunter with integral ring cuts on the barrel. Double recoil lugs hold tight under heaviest recoil. 


**SPECS:** Extruded aluminum, black or silver, anodized, matte finish. 5 1/2" (13cm) long, 7/8" (22mm) wide, 2.6 oz. (74 g) wt. Includes mounting screws.  
**#957-000-045 Silver Redhawk Mount, 7E46G79..... \$51.99**  
**#957-000-044 Black Redhawk Mount, 7E46M54..... 48.99**


**RUGER® SUPER BLACKHAWK®** - A rugged, two-piece no-drill/no-tap scope mount for all models of the Super Blackhawk EXCEPT .45 Long Colt or .30 Carbine guns, Flattop models, or Hunter Model. A billet aluminum underlug is secured with two brass setscrews to the reduce risk of marring the barrel surface. Tightening the Allen screws secures the underlug to the barrel as if it were an integral piece of the revolver. The scope mount is then attached to the underlug and rear sight elevation hole for a no drill and tap installation. Rear sight must be removed. All screws necessary for installation are included. The underlug and body are made from 6061 T6 aluminum. Entire assembly weighs only 2.4 oz. This mount is 4.5" long and fits any-length barrel. 

**#957-000-083 No Drill & Tap Mount For Ruger Super Blackhawk, Black, 6B34G50..... \$57.99**

**#957-000-084 No Drill & Tap Mount For Ruger Super Blackhawk, Silver, 6B34G50..... 57.99**

**SUPER REDHAWK®** - Aluminum mount attaches to the Ruger factory ring cuts and requires no drilling and tapping. Uses three, steel, recoil pins to prevent "scope flyoff," and accepts Weaver-style rings or mount systems such as used on Tasco 40mm red dot optics. Fit only the Super Redhawk in .44 Magnum and can be installed without removing the front and rear sights. Matte silver anodized finish.   
**SPECS:** Aluminum, silver, matte, anodized finish. 5" (12.7cm) long. Fits .44 Magnum only. 2.6 oz (73g) wt.  
**#957-000-036 Super Redhawk .44 Mag Mount, Silver, 7E46M79..... \$51.99**

**RUGER SINGLE SIX** - No-drill, no-tap mount attaches to frame at the rear sight screw. Contoured recoil lug fits in rear sight slot to prevent movement. Accepts Weaver-style rings. Use on .22 LR only, not for use on .32 Magnum guns.   
**SPECS:** Extruded aluminum, black anodized, matte finish. 4 1/2" (11cm) long, 7/8" (22mm) wide, 1.3 oz. (38 g) wt. Includes mounting screws.  
**#957-000-042 Black Single Six Mount, 7E33E29..... \$36.99**

**S&W REVOLVER** - Low profile and lightweight. Fits newer, factory drilled and tapped K, L and N frame revolvers; no gunsmithing required. Older revolvers require drilling and tapping.   
**SPECS:** Extruded aluminum, black or silver, anodized, matte finish. 4 1/2" (11cm) long, 7/8" (22mm) wide, 1.3 oz. (38 g) wt. Includes mounting screws.  
**#957-113-100 Black S&W Mount, 7E34J19..... \$37.99**  
**#957-113-101 Silver S&W Mount, 7E33G29..... 36.99**

**RUGER MARK I/II/III NO-GUNSMITHING** - Install conventional or red dot optics on your pistol in only minutes. Lightweight, aluminum mount attaches to a pre-drilled and tapped, dovetail-filler block. Simply remove your rear sight, install filler-block, screw on mount and attach scope and rings. Accepts Weaver-style rings.   
**SPECS:** Aluminum, black or silver, matte finish. 5 1/2" (14cm) long, 1/2" (12.7mm) wide, 2.5 oz. (71 g) wt. Fits Mark I, II, and III. Includes filler block, mounting screws and instructions.  
**#957-108-022 Black Mark I/II/III Scopemount, 7E23C39..... \$25.99**  
**#957-108-002 Silver Mark I/II/III Scopemount, 7E22H49..... 24.99**

## ALLCHIN S&W REVOLVER MINI STS SCOPE MOUNT



Mount A Mini Red Dot On Any Pre-Drilled S&W Revolver

Easy-to-install mount lets you upgrade any pre-drilled S&W revolver with a small red dot sight. Machined aluminum construction offers durability and weight savings. Mount body alignment holes accept C-More STS, Burris Fastfire, JPoint, Optima 2000, and most other small red dot sights. Positions red dot over the rear sight and as close to the bore as possible for fast target acquisition.   
**SPECS:** 6061 T6 aluminum, hardcoat anodized clear (silver) or matte black. 2.5" (65mm) long, 1" (27mm) wide. .6 oz. (17g) wt. Includes mounting hardware

**#100-010-548 S&W Revolver Scope Mnt, Blk, 5K38B69.. \$42.99**  
**#100-010-549 S&W Revolver Scope Mnt, Sil, 5K38P69.. 42.99**

## LSP HIGH STANDARD SCOPE BASE


Contoured For Bull Barrels

Thirteen cross-slots provide a wide range of mounting positions; cantilever design centers the weight over the grip. Contoured for factory bull barrels (drill and tap). Accepts Weaver-style rings.   
**SPECS:** Aluminum, anodized, matte black finish. 5 1/2" (13.3cm) long. Fits LSP Match barrels, factory bull barrels require drilling and tapping. Includes instructions and screws.

**#530-500-001 High Strnd. Scope Base, 3E29H44..... \$30.99**

**#957-000-035 Black Mark I/II/III Scopemount, 7E46I79..... \$51.99**

**#957-201-100 Silver Mark I/II/III Scopemount, 7E46F54..... 48.99**

**WEIG-A-TINNY MOUNT FOR S&W** - Replaces the rear sight on most Smith & Wesson revolvers manufactured after 1992. Fits K, L, N, and X frame revolvers that come drilled and tapped from the factory. Top straps on older S&W revolvers can be easily drilled and tapped for this scope mount. Oversize recoil lug prevents the scope mount from shifting even when shooting full-house magnum loads. Accepts Weaver-style rings and Picatinny accessories. 2-1/2" long, weighs .9 oz. Supplied screws are 6-48 threaded. 

**#957-000-085 S&W Revolver Scope Mount, Black, 6B34G50..... \$33.99**

**#100-026-974 S&W Revolver Scope Mount, Silver, 7E32L39..... 35.99**

**RUGER MARK I/II/III DRILL & TAP** - Designed to fit factory drilled and tapped receivers for fast, easy, no-gunsmithing installation. Fully contoured to fit flush on top of the receiver or barrel without unsightly gaps. Extra-strong, lightweight aluminum; accepts Weaver-style rings. Can be easily installed on non-factory drilled and tapped pistols.   
**SPECS:** Extruded aluminum, anodized, black or silver. 4 1/2" (12cm) long, includes mounting screws. Fits Mark I, II, III, and 22/45™.


**#957-108-022 Black Mark I/II/III Scopemount, 7E23C39..... \$25.99**

**#957-108-002 Silver Mark I/II/III Scopemount, 7E22H49..... 24.99**

## EGW REVOLVER SCOPE MOUNT



Fits Ruger & S&W Revolvers

Ruger - Mounts the scope low on all single and double action revolvers. Requires drilling and tapping two holes. **Smith & Wesson** - Remove the rear sight and quickly install on newer revolvers drilled and tapped at the factory. Locates the scope on the top strap, over the top of the grip for better balance. Accepts Weaver-style rings. 

**SPECS:** Aluminum, anodized finish, black or silver. 4" (10cm) long, includes mounting screws. S&W fits K, L and N frame.

**#296-302-100 Black Ruger Mount, 6B00CFK..... \$27.00**

**#296-302-101 Silver Ruger Mount, 6B30D00..... 31.50**


**#296-301-100 Black S&W Mount, 6B00PNI..... 27.00**

**#296-301-101 Silver S&W Mount, 6B30C39..... 31.50**

## LSP S&W 41 LONG SCOPE BASE

Extra Long For Precise Eye Relief



Six inch long rail lets you precisely tailor eye relief for each shooter. Fits factory drilled and tapped barrels; drill and tap older barrels for custom mounting applications. Accepts all Weaver-style rings.   
**SPECS:** Aluminum, black, anodized finish. 6" (15cm) long. Separate models for 7" Long or 5 1/2" Long Heavy barrel. Includes screws, instructions.


**#530-041-007 7" S&W M-41 Mount, 3E29D69..... \$32.99**

**#530-041-055 5 1/2" S&W M-41 Mount, 3E30H59..... 33.99**

## TACTICAL SOLUTIONS BROWNING BUCK MARK PICATINNY SCOPE MOUNT



Mount A Scope & Retain Iron Sights


Lightweight, aluminum Picatinny rail replaces factory rib/rear sight and lets you mount an optic while retaining the benefit of backup "iron" sights. Eight cross-slots let you position the optic for best eye relief. Integral open rear sight adjusts for windage and elevation. Drilled to fit the factory hole spacing and use the original factory rib/rear sight screws. 

**SPECS:** 6061 T6 aluminum, hardcoat anodized, matte black. Approximately 5" (12.7cm) long, 1 1/2" (21mm) wide, 3/16" (12mm) high from top of receiver.  
**#100-005-205 Picatinny Scope Mount, 8K00NFH..... \$75.00**

## UM TACTICAL UNIVERSAL PISTOL MOUNT

Allows You To Mount An Optic Onto Your Semi-Auto Handgun



Universal mount allows you to attach tactical optics onto most pistols that have a 1913 Picatinny or accessory rail under the barrel. Made of CNC machined aluminum, with a hard coat anodized finish, mount requires no tools or retro-fitting. Simply slide the mount over the pistol until the safety detent locks onto the barrel rail, and then clamp the optic on top of the mount for a solid fit to your pistol. Fits medium to large sized handguns and adds a 2.5-inch section of Picatinny rail to the top of your pistol. Mount has a small rail on the bottom for attaching a tactical light or laser.   
**SPECS:** Aluminum, hard coat anodized finish, matte black.

**#100-015-786 Universal Pistol Mount, 5B80A74..... \$84.99**

GUARANTEED. FOREVER.®  
SINCE 1939

**NEW!**

**C&H PRECISION WEAPONS**  
**V4 MIL/LEO PISTOL OPTIC**  
**MOUNTING PLATES**

Lets You Mount a Different Red Dot Sight on Your Optic-Ready Pistol



C&H plate doing its job!

These adapter plates are the critical interface between the red dot mounting slot in your pistol's slide and the red dot sight you want to mount on it. Let's say your gun has an integral mount for a particular red dot sight... The right C&H Precision adapter lets you easily install a DIFFERENT red dot sight on that gun. C&H bills their plates as, "The most popular, rugged, durable, reliable, and most widely used aftermarket optics adapter plate. Period!" It's difficult to argue with that. Many modern pistols come with a mounting slot on the slide for a particular red dot/holographic sight model. But if you want to install a different sight that requires a different mount footprint, C&H's adapter plates will convert your pistol to accept the new sight WITHOUT requiring permanent alterations to the slide. They are designed for heavy duty use with a wide range of popular red-dot optics on the market. They are machined from 6061 aluminum and Type III hard-anodized to resist both corrosion and surface wear. There are two recoil posts, and all V4 plates come with replaceable T-posts made of stainless steel. Torx head screws secure them to the slide for the best possible retention. Good news: ALL the mounting hardware is replaceable, so if any item is damaged, it can be replaced on its own - at far less cost! - without replacing the entire plate. **RSF** means "Rear Sight Forward". These plates include a rear "iron" sight blade at the front of the plate that is visible through an RMR sight. RSF models not compatible with Trijicon SRO. **RMR** = Trijicon RMR red dot sight.

STOCK #	FITS GUN	FITS SIGHT	STYLE	PRICE
#100-043-483	Glock MOS	RMR footprint	Standard	3B69P95 \$ 69.95
#100-043-484	Glock MOS	RMR footprint	RSF model	4C124Q99 \$ 124.99
#100-043-488	Glock MOS	Aimpoint ACRO	Standard	8G64U95 \$ 64.95
#100-043-486	Glock MOS	Holosun	Standard	6E69S95 \$ 69.95
		507K/407K		
#100-043-485	Glock MOS	Holosun 509T	Standard	5D64R95 \$ 64.95
#100-043-489	Glock MOS	Leupold Delta-Point Pro	Standard	9H69V95 \$ 69.95
#100-043-487	Glock 43X/48 MOS	Holosun	Standard	7F44T95 \$ 44.95
		507K/407K		
#100-043-492	Smith & Wesson M&P 1.0"	RMR/SRO/Holosun 407C/508T	Standard	3L44Y95 \$ 44.95
#100-043-491	Smith & Wesson M&P M2.0	RMR/SRO/Holosun 407C/508T	Standard	2K44X95 \$ 44.95
#100-043-494	Smith & Wesson M&P M2.0	Leupold Delta-Point Pro	Standard	5N44A95 \$ 44.95
#100-043-493	Smith & Wesson M&P M2.0	SIG Sauer Romeo1 Pro	Standard	4M44Z95 \$ 44.95
#100-043-490	Springfield Hellcat w/RMScut	Holosun 507K/407K	Standard	1J44W95 \$ 44.95

**DEFENDER PLATE FOR GLOCK®** - This model is made of a lightweight reinforced polymer and wraps the top of the slide for a particularly smooth, "of a piece" installation. It also has a clear polymer window that protects the lens of your red-dot sight. Includes the same stainless steel T-nuts and Torx screws as the aluminum plates.

STOCK #	FITS GUN	FITS SIGHT	STYLE	PRICE
#100-043-495	Glock MOS	RMR Type I & II	Defender	6P79B95 \$ 79.95
#100-043-496	Glock MOS	Holosun 407/507/508	Defender (Round Face)	7Q79C95 \$ 79.95

**WEAVER RUGER® BLACKHAWK®**  
**NO-DRILL, NO-TAP MOUNT SYSTEM**

Ready-To-Install Base & Ring System

Compact, lightweight mounts use existing holes for simple, do-it-yourself scope mounting. Everything needed is supplied; just add your scope. **SPECS:** Aluminum base, steel rings; black or stainless steel finish. Approx. 3 1/4" (9.5cm) long, 3/8" (15.9 mm) thick, weighs 5 oz. (142 g) w/rings. Fits Ruger® Blackhawk® and Super Blackhawk®



#955-300-001 301/301S No-Drill/No-Tap Mount, 5E72F19 ..... \$ 75.99

**WEAVER REMINGTON/MOSSBERG SHOTGUN**  
**NO-GUNSMITHING OPTIC MOUNT**



Easy-To-Install, Low-Profile Sight Mount

Easy-to- install mount lets you attach an optic or laser sight to your shotgun without drilling, tapping, or making permanent alterations to the gun. Remove the two trigger group pins (Rem.), or the ejector screw and trigger pin (Moss.), slide on the mount, line up the holes, and secure it with the included replacement pins. Low-profile, form-fitting design looks like part of the receiver and positions the sight close to the bore axis. Seven cross-slots in the 5" rail let you install an optic. Weaver top-mount rings, or other accessory, with plenty of flexibility in setting eye relief. Lightweight, yet rugged, reinforced molded polymer stands up to extreme weather conditions ranging from -40°F to 150°F. **SPECS:** Reinforced, injection-molded polymer composite. Includes mount, button head ejector screw, trigger group bolt, knurled nut, threaded insert, nylon-tipped set screw, 3/16" and 1/8" hex head wrenches, and instructions. Remington fits 870, 1100, 11-87; 12 and 20 gauge; right or left handed models. Mossberg fits 500, 835; 12 gauge only; right handed models only.

#955-000-141 Rem. Mount, Black, 5E25F69 ..... \$ 26.99  
 #955-000-142 Moss. Mount, Black, 5E25F69 ..... 26.99

STOCK #	FITS GUN	FITS SIGHT	STYLE	PRICE
#100-043-497	Glock MOS	Holosun Defender 407/507/508	Square Face	8R79D95 \$ 79.95

**ADAPTERS FOR BROWNELLS RMR-CUT SLIDES** - Brownells RMR Plate is specifically made for Brownells RMR-cut slides with ZEV-style posts. Cannot guarantee fit on any other RMR-cut slides. **RMR w/6-32 Holes** is designed for aftermarket Glock® optics-ready slides with 6-32 mounting holes. This plate only fits RMR cuts without ZEV-style posts. This plate is exactly .181" thick; if your slide's optic cut measures in that area, it will work.

#100-042-861 RMR-Cut Adapter w/ZEV Posts to All Other Optics, 1Z60M99 ..... \$ 64.95  
 #100-042-862 RMR Cut Adapter w/6-32 Holes to All Other Optics, 2A60N99 ..... 64.95

**AIMTECH**  
**SHOTGUN SCOPE MOUNT**

No-Drill, No-Tap Scope Mounts Are Easy To Install

Lightweight mounts fit over and attach to both sides of the receiver to give balanced support for any scope. Built to withstand even hard-hitting slug recoil. Installs in minutes; just remove the trigger group pins and replace with bolts included. Accepts Weaver-style rings. **SPECS:** Aluminum, black, anodized finish. Approx. 6" (15.2cm) long, 2 1/2" (6.3cm) high. Includes bolts, wrenches, instructions.



STOCK #	FITS	GA	PRICE
#017-200-008	Benelli M1 Super 90	12	7A00QCH \$ 66.99
#017-200-009	Browning Auto-5	12	7A71E24 \$ 74.99
#017-200-011	Rem. 1100/11-87	12	7A38K94 \$ 40.99
#017-200-001	Rem. 1100/11-87 Lt.	20	7A37N79 \$ 41.99
#017-200-012	Rem. 870, Lt.	20	7A37G79 \$ 41.99
#017-200-002	Rem. 870	12	7A38D94 \$ 40.99
#017-200-004	Win. 1300	12	7A40D84 \$ 42.99

**MESA TACTICAL SHOTGUN**  
**RECEIVER MOUNT PICATINNY RAIL**



Mount Optics Or Tactical Sights

One-piece, MIL-STD 1913 Picatinny rail allows mounting a variety of optics and tactical sights on popular shotguns. Streamlined, low profile design installs to the top of the receiver for a smooth "built-in" appearance. Four steel, Allen head screws secure rail to receiver for exceptional holding power. Fits shotguns with factory drilled and tapped receivers or receivers custom drilled and tapped for 8-40 threads. Not recommended for mounting optics on guns with high-mounted telescoping stocks. **SPECS:** Machined 6061 T6 aluminum, Type III hardcoat anodized, matte black. Fits factory drilled and tapped receivers. Includes mounting hardware and instructions. Mossberg - 5 1/2" (13.9cm) long. Fits 1997 and later-mfr pump action shotguns; can be installed on 930 semi-auto with additional fitting. Remington 870 - 5 1/2" long. Drop-in fit to 870; can be installed on 1100 or 11-87 semi-auto with additional fitting. Benelli M2 - 4 1/2" (11.4cm) long. Drop-in fit on M2 Tactical; can also be installed on round-top M1 after drilling and tapping receiver.

#100-004-034 Mossberg Receiver Rail, 5A34K19 ..... \$ 35.99  
 #100-005-801 Rem 870 Receiver Rail, 5 1/2", 5A32F39 .. 35.99  
 #100-005-803 Benelli M2 Receiver Rail, 5A47D59 ..... 55.99

**HAVLIN MOSSBERG 500/590/835**  
**SCOPE RAIL**

Solid & Lightweight For Mounting Scopes & Other Optics



Weaver-style scope mounting rail matches the top contour on all Mossberg 500/590 and 835 models for a durable, no-gap installation. Held by four, 8-40 tpi machine screws that stand up to recoil without deformation or stripping. Machined from lightweight, extruded aluminum, and anodized to match the anodized or black painted Mossberg receivers. Accepts all Weaver-style scope mounts and accessories. **SPECS:** Aluminum, black, anodized finish. 5" (12.7cm) long, 2 oz. (56.6g) wt. Includes (4), 8-40 tpi mounting screws. Installation requires drilling and tapping on early model Mossberg 500.  
 #100-002-901 Mossberg Scope Rail, 6A21P59 ..... \$ 23.99

**NEW!** Item

**AREA 419**  
**IMPROVED SCOPE RAIL**



A Scope Base Built Like the Rock of Gibraltar - And Good Looking, Too!

These Picatinny-slot scope bases are machined from 7075 T6 aluminum alloy for a superb combination of strength and light weight. They come off the CNC mill with NO sharp edges - they've all been neatly radiused and chamfered. There's nothing to snag on your sling, other gear, or your hand on the way to the bolt knob. Even the edges of the slot lugs are radiused for a clean look, but make no mistake: these slots are cut to correct MIL-STD 1913 Picatinny spacing. Down below, there's an integral recoil lug that bear against the front of the receiver ring, so these bases STAY PUT under recoil. All other areas that contact the receiver are 1:1 machined to the EXACT profile of action for a superb fit. The ejection port cut blends seamlessly into the action, with plenty of room for use on top-loading ADL-style actions. Remington 700 rails available in two configurations: **ARC Top** has a smooth area in the middle that's slightly dished, mainly for aesthetics (it will not, however, work with MPA or Spuhr mounts). **Full-Slotted** rail is compatible with all Picatinny scope mounts, including Spuhr and MPA, that have a recoil lug in the center of the mount. Both include four each of #6 and #8 Torx T-10 screws, so the mount can be installed immediately, regardless of which screw size your receiver takes. Rails for **Other Rifles** are full-slotted. Most rails available with built-in elevation so you can take those super-long-range shots without taxing out your scope's internal elevation adjustment. **CZ 455 & 457** rails come with a bonus: a built-in green bubble level. The 30 MOA model is ideal for folks who like to push their .22 LR target rifles out to 300+ yards. There's extra real estate at the front of the rail to allow positioning the scope well forward.

#100-029-607	Rem 700 SA 20 MOA ARC Rail, 6Z95L00	\$ 100.00
#100-029-608	Rem 700 SA 20 MOA Full Rail, 6Z95J00	100.00
#100-029-609	Rem 700 SA 30 MOA Full Rail, 6Z95F00	100.00
#100-032-685	Rem 700 LA 20 MOA ARC Rail, 6Z95I00	100.00
#100-032-686	Rem 700 LA 20 MOA Full Rail, 6Z95E00	100.00
#100-029-610	CZ 455 15 MOA Rail w/Level, 6Z95I00	100.00
#100-029-611	CZ 455 30 MOA Rail w/Level, 6Z95L00	100.00
#100-034-610	CZ 457 15 MOA Full Rail, 6Z95L00	100.00
#100-034-609	CZ 457 30 MOA Full Rail, 6Z95N00	100.00
new 100-048-039	CZ 457 50 MOA Full Rail w/Level, 8E94Q00	100.00
#100-036-444	Tikka T1x 15 MOA Full Rail, 6Z57N00	60.00
#100-036-443	Tikka T1x 30 MOA Full Rail, 6Z57F00	60.00
#100-033-169	Tikka T3/T3x 20 MOA Rail, 6Z76J00	80.00

**AIMTECH MINI-14 & 30 SCOUT RAIL**



Very Fast Sighting For Close Range Varmint Hunting

Replaces the handguard with a Picatinny-style rail that securely clamps to the barrel. Iron sights remain usable; no modifications to rifle. **SPECS:** 6000 series, aluminum, black anodized. 9" (22.7cm) long, 14.3 oz. (405 g). Accepts Weaver-style rings.  
 #017-300-014 Mini-14 Scout Rail Mount, 7A83M59 ..... \$ 87.99  
 #017-300-001 Mini-30 Scout Rail Mount, 7A79M19 ..... 87.99

Orders: 800-741-0015

order on the web  
**brownells.com**

**BROWNELLS** PAGE 263

RINGS & BASES

HANDGUN

SHOTGUN

RIFLE



## BROWNELLS BRN-22™ & RUGER® 10/22® BRN-22™ OPTIC RAIL/REAR SIGHT ASSEMBLY



Picatinny Optic Mount for Your Smooth-Top BRN-22™ or 10/22® Receiver

Our add-on Picatinny rail optic mount attaches to the top of a BRN-22™ or Ruger® 10/22® receiver using the pre-drilled factory scope mounting holes. It will fit both standard AND 10/22 Takedown® receivers. Once it's installed, you can mount either a traditional scope or a red dot sight to your rimfire. The integral rear "iron" sight can be used alone with a suitable front sight or as a backup should your optic fail. The rear sight is a standard A1-type M16/AR-15 with the right-side windage adjustment wheel with 10 detent-locked windage settings, and an A2 two-position, flip-up aperture. Many AR-15 shooters will find this sight comfortably familiar; if the AR is not your centerfire rifle of choice, you'll find it practical, effective, and quite versatile in its own right. The MIL-STD 1913 Picatinny rail is machined from 6061 T6 aluminum billet, with a mil-spec Type III hardcoat anodized finish. The A1 sight is machined steel with a durable black oxide finish. Four T-10 Torx® head mounting screws included. **Brownells Gun Tech™ Note:** Screw-on installation to standard BRN-22 (#078-000-429) and BRN-22 Takedown (#078-000-431) receivers. Use with front sights #100-007-029 (standard sporter contour factory barrel) and #100-007-239 (.920" O.D. barrels). Rear sight aperture sizes: .070" and .195". Rear sight thread is 10-36 tpi, so it will accept aftermarket AR-15 apertures. **#100-033-605 BRN-22 Rail/Rear Sight Assy, 4C75K64. . \$ 88.99**



## BROWNELLS PICATINNY SCOPE BASE



Cross-Slot System Provides Solid, Versatile Mounting On Tactical & Sporting Rifles

Rugged, one piece design provides a rock-solid base for scope rings with greater flexibility than traditional ring-and-base systems. Slots cut to true MIL-STD 1913 specs accept both Picatinny and many Weaver-style rings to increase your scope-mounting options on both tactical and sporting rifles. Easily alter the spacing between the rings to accommodate different-length scope bodies, and adjust eye relief to fit the specific needs of each shooter. Installs quickly using factory drilled scope base holes and screws—no drilling and tapping on most guns. Underside of base is cut out to accommodate receivers with right- or left-hand ejection ports. Machined from 6061 T6 billet aluminum for an excellent combination of weight and strength. Matte, black, anodized finish blends with most factory finishes. Models available for Remington, Winchester, and Savage short action (SA) or long action (LA) receivers, plus military Mauser 98 rifles. **SPECS:** 6061 T6 aluminum billet, hardcoat anodized matte black. **Mauser 98** fits military rifles; requires drilling and tapping of receiver; four (4) Torx® head screws included. **Winchester** model fits post-'64 rifles.

### STANDARD PICATINNY BASES

STOCK #	FITS	MATERIAL	PRICE
#080-000-393	Mauser 98	ALUMINUM	8K54H08 \$ 64.99
#080-000-394	Savage Model 10 SA	ALUMINUM	8K43B62 \$ 49.99
#080-000-397	Winchester 70 LA	ALUMINUM	8K41E97 \$ 49.99

**REMINGTON 700 HEAVY-DUTY PICATINNY BASE** - Same one-piece, machined aluminum design as our standard Picatinny scope bases, with oversized, 8-40 tpi mounting screws for greater gripping force that's ideal for heavy, long-range scopes. Requires drilling out and tapping factory receiver holes to accept the larger screws. Models to fit short and long action 700s, in standard or extended height with an extra 20 MOA elevation for those extremely long range shots. **SPECS:** 6061 T6 aluminum, hardcoat anodized, matte black. Includes four steel, 8-40 tpi Torx® mounting screws. Requires drilling and tapping of receiver to accept 8-40 tpi screws. **Fits Remington 700 short action (SA).**

- #080-000-759 Rem. 700 SA HD Base, Stand, 8K40H89 . . . \$ 49.99
- #080-000-761 Rem. 700 SA HD Base, 20 MOA, 8K62F97 . . . 69.99



## BADGER ORDNANCE MAXIMIZED SCOPE RAIL



Forward Cant Lets You Zero At Extended Range

Heavy-duty steel base with 20 MOA forward angle increases maximum scope elevation for long range shooting. Machined after hardening to maintain dimensions. Integral recoil lug withstands the hardest kicking calibers. Uses MIL-STD 1913 Picatinny slot pattern for maximum sight mounting possibilities. **Remington Zero Cant** fits 700 short action only and does not have 20 MOA forward angle; use where extra elevation is not required. **SPECS:** 4142 steel, black, matte finish. 7 1/8" (18.1cm) long, 5.6 oz. (158 g) wt. **Rem Zero Cant** - 6 1/4" (15.9cm) long, 4.9 oz. (138g) wt.

- #093-306-070 Rem 700 Long Action, 3K00MSG. . . . . \$ 153.99
- #093-306-060 Rem 700 Short Action, 3K155E79. . . . . 163.99
- #093-000-012 Rem. 700 SA Zero Cant, 3K155C79 . . . . . 163.99
- #093-000-018 Savage 10 Accu-Trigger, 3K00AKG. . . . . 153.99
- #093-000-005 Win 70 Long Action, 3K00DEQ. . . . . 153.99
- #093-000-006 Win 70 Short Action, 3K00HEL. . . . . 153.99

## BROWNELLS DOVETAIL SCOPE BASE



Fits All Ungrooved .22s; Available In Two Diameters

Brownells Dovetail Scope Base gives you the ability to update any of those millions of older .22 rifles to accept modern rimfire optics. Made of tough, durable, aluminum; black anodized to complement blued firearms. Solid, rigid support. Accepts all tip-off rings designed for 3/16" nominal dovetailed receivers. Pre-drilled and countersunk to accept three 8-40 screws (included). Drill and tap receiver to mount. See our 12" long base stock below for all those special applications. **SPECS:** Aluminum, black, anodized. 1" dia. fits receivers of 1" and 1.05" (2.7cm), 4" (10.2mm) long.

- #080-030-104 100-4 Dovetail Base, 8K4P49. . . . . \$ 5.99

**DOVETAIL SCOPE BASE STOCK** - 12" lengths of blank Dovetail Scope Base Stock - just the ticket for all those strange and challenging scope mounting jobs your customers just keep bringing in. Simply cut to length, drill and countersink, then refinish exposed ends with our Aluma-Hyde™ or Baking Lacquer. Accepts rings that fit a 3/16" nominal dovetail. Contoured to the same base diameter as our 4" Base above, so it'll fit a wide range of popular rifles. **SPECS:** 12" (30.48cm) long. 840-12 contour. .840" (21.3mm), 1" dia. base contour.

- #080-031-841 840-12 Contoured Stock, 8K7C49. . . . . \$ 9.99

## BADGER ORDNANCE

### J-ARM RED DOT MOUNT FOR C.O.M.M.

Neat, Flexible, Lo-Pro Red Dot Mount for Your C.O.M.M. Scope Mount



Badger's J-Arm adapter system enables mounting a variety of accessories directly to their Condition One Modular (Scope) Mount (C.O.M.M.). The J-Arm can be positioned on the left or right, fore or aft, allowing the operator plenty of latitude in deciding exactly the best location for their accessory. Adapter plates sold separately for a variety of popular holographic red dot sights. Machined 7075 T6 aluminum, Type III hardcoat anodized finish. For use ONLY with the C.O.M.M. scope mount. **SPECS:** 7075 T6 aluminum, Type III hardcoat anodized finish. For use ONLY with the C.O.M.M. scope mount.

- #100-034-658 C.O.M.M. J Arm, Black, 3K00MXE. . . . . \$ 50.00
- #100-034-657 C.O.M.M. J Arm, Tan, 3K00J9Q. . . . . 50.00
- #100-034-662 C.O.M.M. Aimpoint T1/T2 Micro Mount, Black, 3K00KPA. . . . . 45.00
- #100-034-659 C.O.M.M. Aimpoint T1/T2 Micro Mount, Tan, 3K00KVA. . . . . 45.00
- #100-034-663 C.O.M.M. Leupold Delta Point Pro Mount, Black, 3K00PVR. . . . . 45.00
- #100-034-660 C.O.M.M. Leupold Delta Point Pro Mount, Tan, 3K00BCN. . . . . 45.00
- #100-034-664 C.O.M.M. Trijicon RMR Sight Mount, Black, 3K00QDD. . . . . 45.00
- #100-034-661 C.O.M.M. Trijicon RMR Sight Mount, Tan, 3K00CRC. . . . . 45.00

## BADGER ORDNANCE C.O.M.M - CONDITION ONE MODULAR MOUNT



Minimal Profile, Ultra-Secure One-Piece Scope Mount With Add-On Red Dot Mounting Capability

The Condition One Modular Mount is Badger Ordnance's answer to a growing demand for modularity in optic mounting. More and more shooters are supplementing their rifle's traditional optical scope with a red dot sight for close-quarters targeting - and Badger has answered the call with a mount that can make the most of precious real estate on the rifle while acting as a centralized hub for attachments. Aside from being a super-secure platform for the scope, the C.O.M.M. eliminates the deflection that occurs with optics, laser sights, and night vision devices attached to handguards. The C.O.M.M. provides the shooter with four extra accessory mounting points on the Uni-mount body both left and right, as well as fore and aft, so you can get the add-on sights you need WHERE you need them, without going hog wild with extra bulk on your rifle. Unlike traditional ring cap accessories, the C1 accessories can be located at the same height and offset in relation to the main mount height, giving the shooter a more consistent offset between his sighting devices. This means you don't have to be shifting your head position around and altering your cheek-ward to the stock in order to go from one sight to another. Made from extra-strong (and still lightweight) 7075 T6 aluminum with a Type III hardcoat anodized finish for add surface strength and resistance to wear. Mounts are available with 20 MOA of elevation built in for the main optic, so you can dial in those really long-range shots without maxing out your scope's elevation adjustment. **SPECS:** 7075 T6 aluminum, Type III hardcoat anodized finish. For use ONLY with the C.O.M.M. scope mount.

STOCK #	RING SIZE	HEIGHT	ELEVATION	COLOR	PRICE
#100-034-647	30mm	1.54"	0 MOA	Black	3K00LHF \$ 305.00
#100-034-637	30mm	1.54"	0 MOA	Tan	3K00LYQ \$ 305.00
#100-034-650	30mm	1.54"	20 MOA	Black	3K00BXQ \$ 305.00
#100-034-640	30mm	1.54"	20 MOA	Tan	3K00DHF \$ 305.00
#100-034-653	30mm	1.70"	0 MOA	Black	3K00FVL \$ 305.00
#100-034-643	30mm	1.70"	0 MOA	Tan	3K00IDA \$ 305.00
#100-034-655	30mm	1.93"	0 MOA	Black	3K00HKF \$ 305.00
#100-034-645	30mm	1.93"	0 MOA	Tan	3K00GFI \$ 305.00
#100-034-648	34mm	1.54"	0 MOA	Black	3K00LUS \$ 305.00
#100-034-638	34mm	1.54"	0 MOA	Tan	3K00GIM \$ 305.00
#100-034-651	34mm	1.54"	20 MOA	Black	3K00EHM \$ 305.00
#100-034-641	34mm	1.54"	20 MOA	Tan	3K00LAF \$ 305.00
#100-034-654	34mm	1.70"	0 MOA	Black	3K00AJK \$ 305.00
#100-034-644	34mm	1.70"	0 MOA	Tan	3K00NKH \$ 305.00
#100-034-656	34mm	1.93"	0 MOA	Black	3K00PRR \$ 305.00
#100-034-646	34mm	1.93"	0 MOA	Tan	3K00QAL \$ 305.00
#100-034-649	35mm	1.54"	0 MOA	Black	3K00LCL \$ 305.00
#100-034-639	35mm	1.54"	0 MOA	Tan	3K00CKR \$ 305.00
#100-034-652	35mm	1.54"	20 MOA	Black	3K00AZA \$ 305.00
#100-034-642	35mm	1.54"	20 MOA	Tan	3K00DGB \$ 305.00

## BURRIS RUGER® WEAVER ADAPTER

Lets You Use Weaver-Style Rings On Ruger Rifles & Revolvers



Gives you a wider selection of available rings. Extra slots expand mounting options. Securely clamps to rifles and handguns; machined for Ruger factory rings. **SPECS:** Steel, polished blue finish. M77® fits M77 rifles, Super Redhawk®. Set of two bases, 1.375" (35.9mm) long and 1.980" (50.3mm) long. 77/22® fits Redhawk® Hunter, Blackhawk® Hunter, 77/22®, 77/44®, 77/50®, Model 96™ (.44 Mag), 10/22® Mag, Mini-14®, Deerfield, and No. 1. Set of two 1.980" long bases.

- #118-410-990 M77 Weaver Adapter, 8A30G59. . . . . \$ 32.99
- #118-410-991 77/22 Weaver Adapter, 8A30P59. . . . . 32.99

**PAY ANY WAY**

**GUARANTEED. FOREVER.®  
SINCE 1939**

## DAI MANAGEMENT ENFIELD NO. 4 & 5 SCOPE MOUNT

Quick Detachable,  
Positive Return To Zero



No gunsmithing required to put a scope on that old Enfield No. 4 or 5. Quick detachable, Weaver-style base is machined to extremely close tolerances for precise return to zero. Attaches solidly to the receiver using the ejector and safety screws. Installation requires no bolt modification or rear sight removal. Leveling adjustments adapt mount to a wide range of receivers; windage adjustments help keep your scope reticle in the center of its range. Does not impair access to safety.

**SPECS:** Aluminum, matte black. Savage-built rifles and others using a flat ejector spring require block-style spring. 3.9" (10cm) long.

#100-000-319 Enfield Scope Mount, 4K68I39 ..... \$ 71.99

## DLASK ARMS RUGER® 10/22® PICATINNY SCOPE MOUNTS



Picatinny Rails For  
Ruger® 10/22® Rifles

Tough, lightweight aluminum rails feature

Picatinny slot spacing for fast, simple changes to eye relief, plus greater flexibility in scope choice. Three height choices fit various objective sizes, or improve cheek weld. Extends over the barrel, or can be reversed to better position optics with shorter eye-relief. Uses the factory-drilled scope base holes, with no permanent alteration to your rifle.

**SPECS:** Aluminum, hardcoat anodized, black. 6 1/2" (16.2cm) long; .375" (.95cm), .500" (1.3cm), or .750" (1.9cm) tall.

#253-000-003 Scope Mount Rail .375", 3E33I14. .... \$ 38.99

#253-000-004 Scope Mount Rail .500", 3E32K39. .... 35.99

## FAREL INDUSTRIES REMINGTON 700 ONE-PIECE SCOPE BASES

Precision-Machined  
Quality & Innovative  
Design



Scope bases precision CNC-machined from solid bar stock are held to .002" tolerances to create an exceptionally flat, straight, solid platform for optics. Accepts Picatinny and Weaver-style rings. Bedding-compound groove helps you get an exact, base-to-receiver fit. Self-centering Torx® head screws and chamfered screw holes help prevent slippage under recoil. Available in one-piece Standard or 20 MOA (20 minutes built-in elevation) models.

**SPECS:** Steel, black oxide finish. 7/16" (11mm) high from bottom to top of base. Short Action (SA) - 5 1/8" (13.8cm) long, 1 1/8" (21mm) wide. Long Action (LA) - 5 1/2" long, 13 cross-slots.

STOCK #	FITS	TYPE	PRICE
#100-001-060	Rem. 700 Short	1-PIECE STD	8K109K99 \$ 119.99
#100-001-074	Rem. 700 Short	20 MOA	8K109C99 \$ 119.99
#100-001-062	Rem. 700 Long	1-PIECE STD	8K109J99 \$ 119.99
#100-001-076	Rem. 700 Long	20 MOA	8K109L99 \$ 119.99

**NEW!** Items

Easy, Versatile Scope  
Attachment For Popular  
Rifles & Shotguns



Add the versatility of a one-piece Picatinny scope rail to your rifle or shotgun with no drilling or tapping. Precision machined from extruded aluminum or hardened steel with Picatinny slot-and-rail spacing that allows fast and simple changes to eye relief, plus great flexibility in scope choice. Some models available with 20 or 30 MOA built-in elevation to aid in long-range shooting without making out scope elevation adjustment. Drilled to fit the factory scope mount holes on the gun's receiver. **Lightweight Tactical** mounts have a milled center channel for weight reduction; hex-head mounting screws and Allen wrench included. **Heavy Duty** mounts are .100" lower than the Lightweight mounts to minimize weight and keep your optic closer to the barrel centerline for improved accuracy. Full-width cross-slots are gauged to MIL-STD 1913 specs to +/- .002". Machined from ultra-rigid, extruded 7075 T6 aluminum or 4140 chrome-moly steel. Includes socket head Torx® screws and wrench.

**SPECS:** **Lightweight Tactical** - 6061 T6 aluminum, anodized, matte black finish. Includes socket head Allen screws and wrench. **Heavy Duty** - 7075 T6 aluminum, mil-spec hardcoat anodized, or 4140 chrome-moly steel pre-hardened to Rc 32-35, mil-spec Parkerized, matte black. Includes Torx screws and wrench.

### LIGHTWEIGHT TACTICAL SCOPE MOUNTS

STOCK #	FITS	LENGTH	ACTION	MOA	PRICE
#296-000-099	Browning A-Bolt	6 1/2" (15.6cm)	SA	0	6B00MMG \$ 36.00
#296-000-100	Browning A-Bolt	7" (17.8cm)	LA	0	6B00IHE \$ 36.00
#296-000-183	Marlin 1895/336/444 S*	5" (12.7cm)	-	0	6B00KJC \$ 27.00
#296-000-102	Mossberg 500/590/835	5 1/2"	'97 & later	0	6B00PNC \$ 27.00
#296-000-089	Rem. 700	6 1/2"	SA	0	6B00GRA \$ 36.00
#296-000-210	Rem. 700	6.3"	SA	20	6B00PIK \$ 36.00
#296-000-088	Rem. 700	6 1/2"	LA	0	6B00MZK \$ 36.00
#296-000-211	Rem. 700	7 1/2"	LA	20	6B00JEL \$ 36.00
#296-000-095	Rem. 760/740/742*	5 1/2"	-	0	6B00IYK \$ 27.00
#296-000-097	Ruger® 10/22®	6 1/2"	-	0	6B00QWF \$ 36.00
#296-000-187	Ruger® 10/22®	6 1/2"	-	20	6B00KHG \$ 36.00
#296-000-217	Ruger American Rifle®	6.7"	SA	0	6B00IME \$ 36.00
#296-000-218	Ruger American Rifle®	6.7"	SA	20	6B00ESR \$ 36.00
#296-000-215	Ruger American Rifle®	7 1/2"	LA	0	6B34L69 \$ 36.00
#296-000-216	Ruger American Rifle®	7 1/2"	LA	20	6B34E69 \$ 36.00
#296-000-090	Savage w/RegTrigger	6"	SA	0	6B00KAI \$ 36.00
#296-000-091	Savage w/AccuTrgr	6 1/2"	SA	0	6B00RRK \$ 36.00
#296-000-212	Savage w/AccuTrgr	7.5"	SA	20	6B00KJL \$ 36.00
#296-000-213	Savage w/AccuTrgr	6.7"	LA	0	6B00BGJ \$ 36.00
#296-000-214	Savage w/AccuTrgr	7.5"	LA	20	6B00PHC \$ 36.00
#296-000-186	Savage Edge/Axis	7 1/2" (18.9cm)	-	0	6B00JKD \$ 36.00
#296-000-175	Savage Edge/Axis	7 1/2"	-	20	6B00MKE \$ 36.00
#296-000-176	Savage Mark II (1 1/2" ejection port)	5 1/2"	-	0	6B00PBC \$ 36.00
#296-000-180	Savage Mark II (1 1/2" ejection port)	5 1/2"	-	20	6B00KAI \$ 36.00
#296-000-177	Savage 93 (1 1/2" ejection port)	5 1/2"	-	0	6B00GCI \$ 36.00
#296-000-179	Savage 93 (1 1/2" ejection port)	5 1/2"	-	20	6B00PRE \$ 36.00
#296-000-101	Tikka T3	7 1/2" (18.7cm)	-	0	6B00KAR \$ 36.00
#296-000-229	Tikka T3	7 1/2"	-	20	6B00MKA \$ 36.00
#296-000-230	Mossberg 100 ATR	7 1/2"	LA 4x4	0	6B00PMM \$ 36.00
#296-000-231	Remington 597	6 1/2"	-	0	6B00AUR \$ 36.00
#296-000-232	Remington 597	6 1/2"	-	20	6B34Q69 \$ 36.00

## EGW ONE-PIECE SCOPE MOUNT

STOCK #	FITS	LENGTH	ACTION	MOA	PRICE
#296-000-233	Savage 42	6 1/2"	-	0	6B00MRK \$ 27.00
#296-000-234	Ruger American Rimfire®	6 1/2"	-	0	6B00ITP \$ 36.00
#296-000-235	Remington 783	6 1/2"	SA	0	6B00PXP \$ 36.00
#296-000-236	Remington 783	7"	LA	0	6B00JQB \$ 36.00
#296-000-237	Remington 783	7"	LA	20	6B00GHC \$ 36.00
#296-000-238	Ruger® 10/22® Takedown	4 1/2"	-	0	6B00BEO \$ 27.00
#296-000-239	Marlin 39	4"	-	0	6B28E80 \$ 36.00
#296-000-248	Remington 1100/1187/Versa Max	5 1/2"	-	0	6B00AFM \$ 27.00
#296-000-249	Remington 870	5 1/2"	-	0	6B00IPA \$ 27.00
#296-000-250	Savage 220 Slug Gun, Shortened	6 1/2"	-	0	6B00ALK \$ 36.00
#296-000-251	Browning A-Bolt 12 Gauge	7"	-	0	6B00AHE \$ 36.00

### HEAVY DUTY SCOPE MOUNTS

STOCK #	FITS	LENGTH	MATERIAL	ACTION	MOA	PRICE
#296-000-149	Rem. 700	6 1/2" (15.9cm)	Alum	SA	0	6B00HVB \$ 63.00
#296-000-156	Rem. 700/722/40X	6 1/2"	Steel	SA	0	6B00JQS \$ 108.00
#296-000-150	Rem. 700	6 1/2"	Alum	SA	20	6B00GLM \$ 63.00
#296-000-157	Rem. 700/722/40X	6 1/2"	Steel	SA	20	6B00GJC \$ 108.00
#296-000-151	Rem. 700	6 1/2"	Alum	SA	30	6B00FWJ \$ 63.00
#296-000-146	Rem. 700	7 1/2" (18.1cm)	Alum	LA	0	6B00CTR \$ 63.00
#296-000-158	Rem. 700/721/40X	7 1/2"	Steel	LA	0	6B00BWN \$ 108.00
#296-000-147	Rem. 700	7 1/2"	Alum	LA	20	6B00OCQ \$ 63.00
#296-000-159	Rem. 700/721/40X	7 1/2"	Steel	LA	20	6B00GSR \$ 108.00
#296-000-148	Rem. 700	7 1/2"	Alum	SA	30	6B00GOA \$ 63.00
#296-000-152	Savage Rnd Back	6 1/2" (17.1cm)	Alum	SA	0	6B61H00 \$ 63.00
#296-000-153	Savage Rnd Back	6 1/2" (16.5cm)	Alum	SA	20	6B61M00 \$ 63.00
#296-000-154	Rem. 870/100/1187	5 1/2" (15cm)	Alum	-	0	6B00AHI \$ 45.00
#296-000-155	Mossberg 500/590/835	5 1/2"	Alum	1997 & later	0	6B00LFF \$ 45.00
#296-000-197	Howa 1500	6 1/2" (16.8cm)	Alum	SA	0	6B00NWS \$ 63.00
#296-000-198	Howa 1500	6 1/2"	Alum	SA	20	6B00LCD \$ 63.00
#296-000-255	Howa 1500	6 1/2"	Steel	SA	0	6B00DYD \$ 108.00
#296-000-256	Howa 1500	6 1/2"	Steel	SA	20	6B00QWJ \$ 108.00
#296-000-253	Howa 1500	7 1/2"	Alum	LA	0	6B00IER \$ 63.00
#296-000-254	Howa 1500	7 1/2"	Alum	LA	20	6B00HVV \$ 63.00
#296-000-240	Tikka T3	7 1/2"	Alum	-	0	6B00NAJ \$ 63.00
#296-000-241	Tikka T3	7 1/2"	Alum	-	20	6B00EJA \$ 63.00
#296-000-242	Mossberg MVP 7.62	6 1/2"	Alum	-	20	6B61H00 \$ 63.00
#296-000-243	Mossberg MVP 7.62	6 1/2"	Alum	-	0	6B61B00 \$ 63.00
#296-000-244	Mossberg MVP 5.56	5 1/2"	Alum	-	0	6B61Q00 \$ 63.00
#296-000-245	Mossberg MVP 5.56	5 1/2"	Alum	-	20	6B61N00 \$ 63.00
#296-000-246	Ruger No.1	7 1/2"	Alum	-	0	6B00JUB \$ 63.00
#296-000-247	Springfield 03A3/03A4	5 1/2"	Alum	-	0	6B00EPA \$ 63.00

## FULTON ARMORY M14/M1A PICATINNY SCOPE MOUNT

Secure, Stable, No-Gunsmithing  
Scope Attachment



One piece, steel mount provides a secure, stable scope base that won't shift between shots. Rock-solid, three-point mounting system attaches to the factory scope mount screw hole in the receiver and the charger guide dovetail, while the setscrew at the front uses the receiver ring as a stop to prevent forward movement. No drilling or tapping required; mounting hardware included. Machined from the same type of steel as the M14 receiver, so mount and receiver expand at the same rate as the gun heats up to help keep your optic zeroed during prolonged fire. Thirteen MIL-STD 1913 Picatinny cross-slots offer plenty of versatility in setting eye relief. Sight channel allows use of iron sights without removing the scope. Cutout above ejection port helps prevent case hangups.

**SPECS:** 8620 steel, Parkerized, matte black finish. 5 1/2" (14cm) long, 1 1/2" (3.8cm) wide, 2" (5.1cm) tall. 11.6 oz. (329g) weight. All mounting hardware included. Minor fitting required.

#100-005-275 Scope Mount, 3K00MWP ..... \$ 234.99

## GEISSELE AUTOMATICS SUPER PRECISION® SOPMOD CERTIFIED SCOPE MOUNTS

Ultra-Secure Precision Mounts  
Customized for Specific Scopes



AR-15 National Match

Each Geissele one-piece (when assembled) Super Precision scope mount is custom designed for mounting a specific optic on an M4A1 carbine, FN SCAR Mk 16, and other firearms used by the United States Special Operations Command (USSOCOM). Performance and reliability were the primary goals in their development. These mounts will provide an extremely secure foundation for the optic to ensure maximum operator effectiveness in providing long-distance suppressive fire. They're also exceptionally solid, reliable mounts for any long-range civilian shooting application. Every SOPMOD series mount has been put through rigorous U.S. military testing and certification by USSOCOM for use by Special Forces combat soldiers. Precision-machined 7075 T6 aluminum billet construction with hardened steel ring cap screws and cross-bolts, mil-spec hardcoat anodized finish, matte black. **Vortex** models specifically designed for use with Vortex 1-6x scopes (30mm tubes). Available in 2 heights (top of rail to scope centerline); higher model provides clearance over rangefinders, lasers, and IR devices. **SR-25** models are for the SR-25 rifle platform, configured for the Leupold Mark 6 and Leupold Mark 8 CQBSS (both 34mm tubes) scopes. **AR-15 National Match** mount shares many of the SOPMOD series features and is engineered to meet the demands of civilian high-power competition, including the recent CMP rules for use of optic sights. Forward scope position plus 1.3" height (top of rail to scope's centerline) help you maintain a good cheek weld. Built-in 10 MOA of elevation.

#100-025-597	AR-15 SOPMOD Vortex 1-6x Mount, 1.54" High, 7B00KJM	\$ 325.00
#100-025-598	AR-15 SOPMOD Vortex 1-6x Mount, 1.93" High, 7B305Q00	325.00
#100-025-599	SR-25 SOPMOD Mark 6 Mount, 7B332J50	350.00
#100-025-654	SR-25 SOPMOD CQBSS Mount, 7B332K50	350.00
#100-025-596	AR-15 National Match 30mm Mount, 1.3" High, 7B00KIM	350.00

Orders: 800-741-0015

order on the web  
**brownells.com**

**BROWNELLS** PAGE 265

RINGS & BASES

RIFLE



**GG&G RUGER® MINI-14®  
RANCH RIFLE OPTIC MOUNTS**



For Secure Installation Of Scope Or Mini Red Dot With Plenty Of Eye Relief

No-gunsmiting aluminum mount clamps to the receiver notches for the fac-tory scope rings to let you install the latest tactical optics on your Ranch Rifle.

Almost 6" long to provide plenty of versatility to position the optic forward for long eye relief and quick target acquisition, while you maintain a comfortable cheekweld. Machined relief cuts on the underside ensure unimpeded cartridge ejection. **Mini Red Dot** model accepts mini red dot holographic sights from Burris, Docter, JP, and Trijicon. **Picatinny** has a standard MIL-STD-1913 rail with 14 slots to accept conventional Picatinny scope rings.

**SPECS:** 6061 T6 aluminum, mil-spec Type III hardcoat anodized, matte black. Fits Ruger Mini-14 Ranch Rifle. Mounting screws, adapter plate (Red Dot model only), and instructions included.

- #336-000-035 Mini Red Dot Mount, 6C44A64..... \$ 46.99
- #336-000-036 Picatinny Rail Mount, 6C44D86..... 46.99

**HAVLIN MOSSBERG .22 RIMFIRE  
M22 SUPER SIDE SCOPE MOUNT**

Update Your Vintage Rimfire With Your Choice Of Optics



Weaver-style rail conforms to receiver curvature and attaches to existing mounting holes, centering any diameter scope directly over the barrel. Lets you mount full-size scopes and red-dot optics. Provides enough clearance to keep original rear sights in place. Easy installation: remove bolt cover, if present, add rings and scope of choice. **SPECS:** Aluminum, black anodized finish. Rail measures 4 1/8" (11.3cm) long, 3/8" (1.4cm) high. Fits following models with side-tapped receiver: 26B, 26C, 42A, 42B, 42C, 42M (all variants), 43, 44B, 44US (all variants), 46A, 46B (all variants), 46M (all variants), and most Wards-Westernfield rifles (made by Mossberg) with side-tapped holes measuring 1 1/8" (4.1cm) center-to-center.

- #100-001-258 M22 Scope Mount, 6A27H54..... \$ 28.99

**KINETIC DEVELOPMENT GROUP  
SIDELOK OPTIC MOUNT**



A Versatile, Adaptable, Truly Quick-Attach/Detach Scope Mount

The Sidelok's user-configurable options make it one of the most versatile QD scope mounts available. You can quickly clamp it to any Picatinny receiver rail, then remove it just as fast, with one hand, simply by pressing the release button at the front. The Sidelok's innovative locking system makes it virtually impossible to unintentionally release the mount. And the cam lock system ensures the Sidelok will fit all Picatinny rails, even those that are out of spec. The rings can be moved forward or rearward to avoid interference with objective bells, turret knobs, or magnification adjustment collars. They are CNC-machined and wire-EDM cut to be as precisely concentric as possible. Top- and bottom-halves are machined together as a unit, and witness marks help the user keep the correct top mated to its matching bottom. Type III hardcoat anodized finish.

- #100-025-960 30mm Sidelok Optic Mnt, 7C00HKN... \$ 209.24
- #100-025-961 34mm Sidelok Optic Mnt, 7C00AJI... 209.24
- #100-025-962 1" Sidelok Optic Mount, 7C00BSL... 209.24

**KWIK-SITE  
KWIK-MOUNT® ADAPTER BASE**



Lets You Use Weaver-Style Rings On Any 3/8" Dovetailed Receiver

Handy one-piece, Weaver-style conversion base lets you mount optics on any .22 caliber rifle with a 3/8" dovetailed receiver. Eight slots give you flexibility to vary the ring spacing and mount a variety of different eye-relief scopes. Made of aluminum to keep additional weight to a minimum with steel cross-bolt and clamping bar for a tight hold. **SPECS:** Aluminum with steel hardware, matte black finish. 1-Piece - 4.3" (10.9cm) long, 2-Piece - 8" (2.1cm) long, each.

- #100-005-941 1-Piece Adapter Base, 8B28M79..... \$ 31.99

**LEUPOLD  
MARK AR SCOPE MOUNT**

Rock-Solid One-Piece Scope Mount for Your AR-15



Leupold's Mark AR one-piece scope mount, the latest iteration of their popular Integral Mounting System, solves two common issues when mounting scopes to AR-15 rifle platforms: getting the right scope height and the right eye relief. The cantilever Mark AR mounts directly to the rifle's Picatinny receiver rail to raise the scope and push it forward, so there is no need for risers or specialized optics with shortened eye relief. The locking bar has 5 cross-bolts design for an ultra-secure hold, plus 3 lugs on the bottom that'll withstand any kind of recoil. The STANAG fit means there's more contact area with the Picatinny rail for precise, non-slip fit so your scope won't lose its zero due to shifting in the mount under recoil. Aluminum construction, hardcoat anodized matte black with steel cross-bolts. 3.5" spacing between the rings (4.75" outside). Easy and fast to install or remove with the scope still in the Mark AR - and the good news is when you reinstall it, the scope will still be correctly zeroed.

- #100-034-126 1" Mark AR IMS Scope Mnt, 4K00FYJ..... \$ 89.99
- #100-034-127 30mm Mark AR IMS Scope Mnt, 4K00FGF... 89.99
- #100-034-128 34mm Mark AR IMS Scope Mnt, 4K80J74... 84.99
- #100-034-129 35mm Mark AR IMS Scope Mnt, 4K80G74... 84.99

**MASTERPIECE ARMS ONE-PIECE  
BOLT ACTION SCOPE MOUNT**



Easy To Install; Remove & Reinstall on Rifle Without Loss of Zero; Tolerant of Out-of-Spec Receiver Rails, Too

This mount brings the easy installation of one-piece AR-15 scope mounts to the bolt action platform. It fits bolt action rifles with Picatinny rail scope bases. Precision machined from 6061 T6 aluminum with a Type III hardcoat anodized finish to add surface strength and resist corrosion, this mount provides over 3.5" of contact with the receiver rail, backed up by multiple locking lugs on the bottom to ensure there's no shifting about under recoil - so if you remove the mount with the scope still installed, you'll get absolute return-to-zero when you reinstall the assembly on the rifle. The engagement points are designed to be friendly to both true MIL-STD 1913 Picatinny receiver rails and somewhat less rigorously dimensioned... OK, we'll just call it and say "out of spec" rails. Horizontal split rings with four cap screws on each ring.

- #100-036-332 34mm 1.125" Bolt Action Scope Mount, 5G236B55..... \$ 249.00
- #100-036-333 34mm 1.250" Bolt Action Scope Mount, 5G236J55..... 249.00

**MIDWEST INDUSTRIES  
GEN2 CANTILEVER SCOPE MOUNT**



Ruggedly Built To Ensure That Scope Ain't Goin' Nowhere Under Recoil

Midwest's forward-offset mount gives proper eye relief specifically for mounting a traditional rifle scope on your AR-15 platform rifle. As with all Midwest products, this mount is ruggedly built for extreme use on in competition or tactical operations. It's machined from 6061 T6 aluminum with a matte black hardcoat anodized finish for added surface strength, wear-resistance, and corrosion protection. The full-length one-piece clamping bar will not work loose under recoil, and it works with the dual STEEL locking lugs and 1/2" dia. locking nuts to ensure this mount ain't goin' nowhere, even under the most "authoritative" recoil. The 30mm mount places the scope 1.50" above the top of the receiver rail, while the mount for 1" scopes puts the scope body 1.415" above the rail; BOTH have enough clearance for scopes with 56mm objective bells. Overall length: 5.875". Distance between the rings is 2.80" and the offset of the first ring is 1.40". Weight approx.. 8.2 oz.

- #100-039-195 1" 0 MOA Cantilever Scope Mount, 2A116E99..... \$ 129.95
- #100-039-194 30mm 0 MOA Cantilever Scope Mount, 2A116L99..... 129.95
- #100-039-518 30mm 20 MOA Quick-Detach Scope Mount, 2A170D99..... 179.95

**MIDWEST INDUSTRIES AK-47/74  
SCOPE MOUNT**



Fast On/Off Scope Mount For Kalashnikov Rifles

Install and remove your scope with a twist of a lever with no loss of zero. Lightweight machined aluminum side mount features the ASM Auto Lock System that can be removed then reinstalled in seconds without having to re-adjust or re-zero the scope. Fits AK 47 and AK74 rifles equipped with the built in AK side receiver interface. Mount keeps the scope low, directly above the top cover for fast target acquisition. Scope rail is built to 1913 Picatinny specs and will accept all Picatinny scope rings or mounts. **SPECS:** 6061 aluminum, anodized finish, black, 6 3/4" (17cm) long, 7.3 oz. (206g) wt.

- #100-009-103 MI AK-47/74 Scope Mount, 2A104B49..... \$ 109.99

**NODAK SPUD RUGER® 10/22®  
PICATINNY RAIL W/REAR SIGHT**



Gives Your 10/22® A Picatinny Rail & Backup Rear Sight

Machined aluminum Picatinny rail fits on top of factory 10/22 receivers to provide versatile mounting space for optics. Includes a windage/elevation-adjustable rear sight adjustable for elevation and windage. Simply screws into factory holes standard in 10/22 receiver with the included Torx head screws. Gives a sight picture similar to an AR-15 with 10-position windage drum.

- #100-012-174 10/22 Rear Sight w/Rail, 4C00QEF.... \$ 89.90



**MOUNTAIN TACTICAL  
TIKKA T1X & T3/T3X  
PICATINNY SCOPE MOUNTING  
RAILS**



A Rock-Steady Base That Vastly Opens Up Optic Options for Your Finnish Rifle

MT's Picatinny scope rails provide a rock-solid mounting platform for the scope of your choice on your rimfire Tikka T1x or centerfire T3/T3x. These rails are true MIL-STD 1913 Picatinny spec rails machined to an exacting +/- .0005" tolerance. Unlike standard Weaver-style rail mounts that offer limited contact with the scope rings, MT's full Picatinny rails contact the scope rings over the entire width of the mount, eliminating potential damage that can occur if the scope shifts around under heavy recoil. They are machined from 6061 T6 aluminum billet and Type 3 hardcoat anodized to resist surface wear and corrosion. Type 3 anodizing creates a hardened coating with a Rockwell Hardness value between 60 and 70. **Gen2 Performance Series Rails for T3/T3x** have a recoil lug machined into the rail bottom to mate with Tikka's Opti-Lock recess on the receiver. This recoil lug absorbs the shearing forces of the mount under recoil instead of the four tiny screws that most other mounting systems rely on. Available in 0 MOA and 20 MOA. **T1x Gen2 Extended Rail** is as sturdy and well-built as the T3/T3x models, and it mates securely with the 11mm European standard rimfire dovetail on the action. This 11mm dovetail normally limits one's choice in scope mounting options, but not with Mountain Tactical's rail on your rifle. You can install any Picatinny or Weaver-style scope rings on your rifle. 8.5" long. Available with 20 MOA and 30 MOA built-in elevation.

- #100-061-467 T1x 20 MOA Extended Rail, 6U51E43... \$ 60.00
- #100-061-468 T1x 30 MOA Extended Rail, 7V51F43... 60.00
- #100-061-486 T3/T3x Receiver-Length Perf Rail, 0 MOA, 8W51G43..... 60.00
- #100-061-487 T3/T3x Receiver-Length Perf Rail, 20 MOA, 9X51H43..... 60.00
- #100-061-488 T3/T3x Extended Perf Rail, 20 MOA, 1Y60J00..... 70.00



**MIDWEST INDUSTRIES H&K MP5/  
MP5K/SP5K/SP89  
TOP RAIL OPTIC MOUNT**



Quick & Easy Way To Get Plenty of Optic Mounting Real Estate on Your MP5


Midwest's easy to install Picatinny Rail Optic Mount for the H&K MP5 and clones (including the new SP5) is a sturdy, compact, rock-solid red dot mount that won't interfere with your MP5's charging handle. It enables mounting of optics, lights, lasers, and other accessories without having to remove the factory handguard. The mount is machined from 6061 aluminum and given a tough, hardcoat-anodized finish. Made in the USA, so it is 922(r) compliant. Designed to fit 9mm receivers only; there may be problems with fitting to 40-cal. and 10mm receivers. Mounting hardware is included. **MP5 M-LOK®** model still has the Picatinny rail over the receiver, but also has a rail that extends over the barrel and includes M-LOK slots for mounting a forward optic or other sighting device. **MP5K/SP89 M-LOK®** model is for SP5K, MP5K, SP89, and K-size clones.

- #100-041-109 H&K MP5 Top Pctnny Rail Mnt, 3R56B43... \$ 59.95
- #100-043-208 H&K MP5 Top Rail M-LOK, 2A117B14... 124.95
- #100-043-209 H&K MP5K/SP89 Top Rail M-LOK, 2A99J93..... 109.95

**GUARANTEED. FOREVER.®  
SINCE 1939**

## NIGHTFORCE TAPERED PICATINNY BASES

Provides Extra Elevation For Long-Range Shooting

Rugged, tactical bases cut with MIL-STD 1913 Picatinny slots have built-in elevation adjustment for making long-range shots without exceeding your scope's adjustment range. Machined from steel billet for extreme strength and recoil resistance. One piece bases enable forward scope mounting and include an integral recoil lug that contacts the front of the ejection port. 


**SPECS:** Steel, black, matte finish. Includes torx screws. **1-Piece** approx. 6<sup>7</sup>/<sub>16</sub>" (17.1cm) long. **2-Piece** approx. 1<sup>1</sup>/<sub>16</sub>" (3.4cm) long each, sold in pairs.

STOCK #	FITS	STYLE	ELEVATION	PRICE
#524-000-007	Rem 700 SA	1-Pc	20 MOA	4B00JSB \$ 120.00
#524-000-008	Rem 700 LA	1-Pc	20 MOA	4B00PLA \$ 120.00
#524-000-016	Rem 700 SA	1-Pc	40 MOA	4B00GRC \$ 120.00
#524-000-011	Rem 700 SA	2-Pc	20 MOA	4B00GQP \$ 90.00
#524-000-012	Rem 700 LA	2-Pc	20 MOA	4B00EVG \$ 90.00
#749-012-028	Savage Accu Trigger SA	1-Pc	20 MOA	4B00NDS \$ 120.00
#749-012-029	Savage Accu Trigger LA	1-Pc	20 MOA	4B00KIP \$ 120.00
#524-000-006	Winchester 70 LA	1-Pc	20 MOA	4B00IMM \$ 137.00

## POWER CUSTOM RUGER® 10/22® RECEIVER MOUNT



Versatile Mount For Compact Scopes & Sights

Quickly attaches to factory drilled and tapped 10/22 receivers. Six, cross-slots provide the versatility to mount full size scopes, plus red dot sights or compact scopes using Weaver-style rings. Silver anodized or hard coat, black finish matches factory receiver. 


**SPECS:** T6061 Aluminum, silver, anodized or hard coat, black finish. 4.75" (12cm) long. Includes screws and Allen wrench.

#713-122-101 Silver 10/22 Receiver Mount, 3A16K19 . . . \$ 17.99  
#713-122-100 Black 10/22 Receiver Mount, 3A16J19 . . . 17.99

## PRECISION ARMAMENT REMINGTON 700 PICATINNY SCOPE RAIL

Lightweight Mount With The Strength Of Steel & Only 1/3 The Weight



MIL-STD 1913 Picatinny rail is machined from lightweight Tennifer® 7068 alloy that gives the same strength as steel with only 1/3 the weight. All contact surfaces are stress relieved and pre-ground before final machining to exact MIL-STD 1913 dimensions. Integral recoil lug and elongated mounting screws let you position the rail so the lug will bear properly against the receiver to prevent the rail from moving even under aggressive recoil. Built in 20 MOA of elevation for extended long-range shooting. All surfaces are fully chamfered, with extra clearance over the ejection port. 

**SPECS:** Tennifer® 7068 alloy, hardcoat anodized, matte black finish. Instructions and 6-48 mounting screws included. **Short Action (SA) only.** 6<sup>1</sup>/<sub>16</sub>" (16.5 cm) long, .380" (9.4 mm) high at front ring, 2.3 oz. (.65g) wt.


#100-011-239 Rem 700 Picatinny Scope Rail, SA, 2D110Q19 . . . \$ 115.99

**NEW!**

## REPTILIA AUS SCOPE MOUNT

Secure, Easy-to-Install "Onesie" Picatinny Scope Mount



Picatinny receiver rail attaches via an anti-slug, spring-loaded steel clamp and custom bolt mounting system. The bolt can be tightened with either a 3/16" hex wrench or, in a pinch, a flat-blade driver to sit flush with the body of the mount for a streamlined, low-profile, snag-free, package. The AUS mount is machined from a single billet of extra-hard 7075 T6 aluminum, with a Type III Class 2 hard-anodized finish. Provides 1.54" elevation from top of rail to centerline of scope. Allows clearance for scopes with an objective bell up 77mm in diameter over receiver rail. 

#100-047-199 30mm AUS Optic Mnt, Blk, 1S282B25 . . . \$ 294.99

#100-047-200 30mm AUS Optic Mnt, FDE, 2T282C25 . . . 294.99


#100-047-201 34mm AUS Optic Mnt, Blk, 3U282D25 . . . 294.99

#100-047-202 34mm AUS Optic Mnt, FDE, 4V282E25 . . . 294.99

## SAMSON AK-47 REAR SIGHT RAIL



No-Gunsmiting Optic Mount With Backup Rear "Iron" Sight

An easy way to add a tactical optic to your Kalashnikov, this steel mount replaces the rear sight on any AK-pattern rifle to enable mounting of a red dot or holographic sight. MIL-STD 1913 Picatinny slots provide a rock-solid attachment point for the optic that won't shift during extended-fire sessions. Easy to install - requires no permanent modification to the rifle. Channel through the length of the mount has a built-in rear sight that works with factory front sight for iron sight backup in the event of optic damage, failure, or battery run-down. 


**SPECS:** Machined steel, black oxide finish. 3<sup>1</sup>/<sub>16</sub>" (8.9cm) long. 3.5 oz. (99g) wt. Rail fits all AK-pattern rifles with a rear leaf sight. All mounting hardware included.

#100-006-266 AK-47 Rear Sight Rail, 1B101H14 . . . \$ 118.99

## S&K INSTA SCOUT MOUNTS

Fast To Install; No Permanent Alterations



Lightweight, machined aluminum mounts deliver the increased accuracy of Scout Rifle optical sighting without changing or altering the original configuration of your prized military rifle. All models replace the standard issue rear sight assembly, so you can mount intermediate eye relief scopes over the handguard for fast, both-eyes-open aiming. Requires no drilling, tapping or permanent alterations to the rifle. Accepts Weaver-style rings and accessories. 

#794-000-008 Schmidt Ruben K31 Mount, 4G61B19 . . . \$ 71.99

#794-000-009 Maser 98 K Mount, 4G55I24 . . . 64.99

## SMITH ENTERPRISE M14/M1A PICATINNY SCOPE MOUNT



All Steel, Solid, Three-Point Attachment

Fully-machined hardened steel Picatinny mount with three-point mounting, provides a stable, secure base for mounting large objective scopes. Easily clamps to

## RS PRODUCTS AK-47/AKM AKM SCOPE MOUNT

For Easy, Secure Installation Of 30mm Red Dot Sight

Incredibly versatile mounting system clamps directly to side rail of Kalashnikov-pattern rifles for "bank-vault" strong attachment of optics. Unique design positions optic directly over the centerline to allow it to co-witness with iron sights and features a quick release lever that allows the optic to be removed and reinstalled without tools. Two-piece design gives options for mounting position and eye relief. **Front Lower Mount** gives 3" mounting space along the front half of the receiver. **Rear Lower Mount** gives 3" mounting space along the rear half of receiver. **Full Length Lower Mount** gives 6" mounting space along the receiver. **AK310 Full Length Lower Rail** fits Romanian M10 and Yugo OPAP and NPAP rifles. **30mm Upper Mount** gives a single-ring attachment for 30mm red dot optic. **AKML Upper Mount** fits the Aimpoint T-1 and H-1. **AKOG Upper Mount** fits Trijicon ACOG sight system. Complete system requires one upper mount and one lower mount. **AKR Upper Mount** gives Picatinny upper rail that fits onto any RS Regulate lower mount. All mounts sold separately. 

**SPECS:** 6061 T6 aluminum, hardcoat anodized, matte black. **Front Lower Mount** - 6" (15.2cm) long, 2<sup>1</sup>/<sub>4</sub>" (5.7cm) high. **Rear Lower Mount** - 5" (12.7cm) long, 2<sup>1</sup>/<sub>4</sub>" (5.7cm) high. **Full Length Lower Mount** - 6<sup>1</sup>/<sub>4</sub>" (15.8cm) long, 2<sup>1</sup>/<sub>4</sub>" (5.7cm) high. **AK310 Full Length Lower Rail** - 6" (15.8cm) long, 1.9" (4.8cm) high. **30mm Upper Mount** - 1" (2.5cm) long, 2" (5cm) high. **AKML Upper** - 1<sup>1</sup>/<sub>16</sub>" (4.6cm) long, 1<sup>1</sup>/<sub>16</sub>" (2.38cm) high. **AKOG Upper Mount** - 3<sup>1</sup>/<sub>16</sub>" (9.2cm) long, 1.5/16" high. **AKR Picatinny** - 5 (12.7cm) long, 1 1/4" (3.1cm) high.

#100-011-182 Rear Lower Mount, 2D114N95 . . . \$ 121.00

#100-011-183 Front Lower Mount, 2D114E95 . . . 121.00

#100-011-181 Full Length Lower Mount, 2D114A95 . . . 121.00


#100-013-589 AK310 Full Length Lower Rail, 2D114A95 . . . 121.00

#100-011-184 30mm Upper Mount, 2D00PIK . . . 65.00

#100-011-560 AKML Red Dot Upper Mount, 2D00KPK . . . 65.00

#100-011-561 AKOG Upper Mount, 2D00MPM . . . 73.00

#100-011-749 AKR Picatinny Mount Upper Rail, 2D00JEQ . . . 73.00

**VZ 58 REAR-BIASED LOWER RAIL** - fits VZ 58 rifles with mounting rail on side of receiver. Lower rail specially shaped to help put the optic near to the shooter's eye, and windage adjustments let you position the optic directly over center bore. Optic position can be permanently staked in. Accepts all RS Regulate upper optic mounts. 

**SPECS:** 6061 T-6 Aluminum, hardcoat anodized, matte black. 4.7" (11.9cm) long, 2.1" (5.3cm) high.

#100-013-590 VZ 58 Rear-Biased Lower Rail, 2D114M95 . . . \$ 121.00

the charger guide dovetail and receiver mount lug without modifications to rifle. Heavy, forward locking screw gives rock solid stability at the receiver ring. Sight channel allows back-up use of iron sights without removing scope. Accept Weaver-style rings, too. **SPECS:** 4140 steel, nitride finish, black. Hardened to Rc 60-62. 5<sup>1</sup>/<sub>16</sub>" (13.6cm) long, 1.875" (4.7cm) high, 10.9 oz (310 g) wt.

#851-000-001 Std. M14/M1A Picatinny Mnt, 1E00AYR . . . \$ 323.99

## SADLAK INDUSTRIES M14/M1A TACTICAL SCOPE MOUNT

Maximum Support, Superior Strength-To-Weight Ratio



Helps keep the weight down when adding heavy tactical optics to your M14/M1A. Three-point design clamps down solidly, without alteration, to the side receiver ring, charger guide dovetail and receiver mount lug. Precision-cut rail includes 5° angle milled on the underside for easy case ejection without hang-ups; accepts Picatinny and Weaver-style rings. Open sight channel gives unobstructed view of back-up iron sights. Standard model is available in three strength-to-weight combinations. **Steel** model is fully machined from stress-relieved 4142 chrome-moly steel barstock, hardened to Rc 28-32 for maximum strength. **Aluminum** model is machined from 7075 bar stock aluminum and hardcoat anodized matte black for durability. **Airborne** model features a lightweight skeletonized frame with seven, 3/16" diameter CNC machined lightening holes in the top of the rail for reduced weight without sacrificing strength. Machined from chrome-moly steel bar stock and heat-treated to Rc 50 for superior strength. Mil-Spec Parkerized finish resists abrasion and corrosion. Adopted by the 101st Airborne. 

**SPECS:** 5<sup>1</sup>/<sub>16</sub>" (13.8cm) long, 2" (5.1cm) wide, 1<sup>1</sup>/<sub>16</sub>" (4.4cm) high. Includes mounting hardware, Allen wrenches, and complete instructions. **Steel** - 4142 chrome-moly steel, hardened to Rc 28-32, mil-spec manganese phosphate Parkerized, matte black. 11.8 oz. (334g) wt. **Titanium** - Titanium, black, nitride finish. Base hardness Rc 34, surface hardness Rc 85. 7.3 oz. (207g) wt. **Aluminum** - 7075 aircraft aluminum bar stock, hard coat anodized, black, matte finish. 4.3 oz. (123g) wt. **Airborne** - Steel, chrome-moly, Parkerized, black, matte finish. 9.4oz. (266g) wt.

#100-005-434 Steel Scope Mount, 6A242B09 . . . \$ 268.99

#100-002-407 Aluminum Scope Mount, 6A151C19 . . . 167.99


#100-003-841 Airborne Scope Mount, 6A269M09 . . . 298.99

**NEW!**

## SCALARWORKS LEAP MOUNT FOR AIMPOINT RED DOT SIGHTS



Secure, Lightweight Mount Holds Optic's Zero Through Multiple Remove/Reinstall Cycles

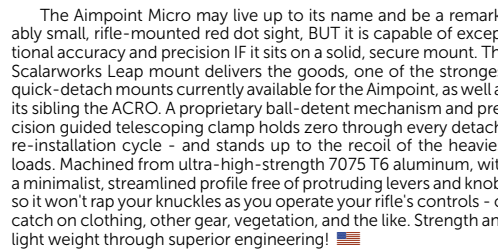The Aimpoint Micro may live up to its name and be a remarkably small, rifle-mounted red dot sight, BUT it is capable of exceptional accuracy and precision IF it sits on a solid, secure mount. The Scalarworks Leap mount delivers the goods, one of the strongest quick-detach mounts currently available for the Aimpoint, as well as its sibling the ACRO. A proprietary ball-detent mechanism and precision guided telescoping clamp holds zero through every detach/re-installation cycle - and stands up to the recoil of the heaviest loads. Machined from ultra-high-strength 7075 T6 aluminum, with a minimalist, streamlined profile free of protruding levers and knobs so it won't rap your knuckles as you operate your rifle's controls - or catch on clothing, other gear, vegetation, and the like. Strength and light weight through superior engineering! 

#100-043-524 Aimpoint Micro Leap Mount - 1.93", 2Z149K00 . . . \$ 149.00

#100-043-525 Aimpoint ACRO Leap Mount - 1.42", 3A149L00 . . . 149.00

#100-043-526 Aimpoint ACRO Leap Mount - 1.57", 4B149M00 . . . 149.00

Orders: 800-741-0015

order on the web  
**brownells.com**

**BROWNELLS** PAGE 267



**SPUHR**

**IDEAL SCOPE MOUNT SYSTEM**



**Multiple Accessory Attachment Points & A Built In Level**

Revolutionary scope mount allows you to attach multiple accessories to it while an integrated level provides accurate readings of the rifle's cant. Mount has seven different locations where accessories or short Picatinny rails can be directly attached, including two at 45° angle. Built in level will not shift and has no protruding parts or edges to get in the way. Cut at a 45° angle, rings have low, flat areas on the top and sides for an unobstructed view of the scope tubes. Lines molded into the top and right

side of rings serve as indicator lines for the scope. Machined from a single piece of aluminum, this extremely sturdy mount will not flex under heavy recoil, protecting the scope from being damaged. Mount comes with a 10° indexing wedge that slips between the scope and mount to insure the scope is perfectly level. *Some items ship directly from manufacturer. Please allow 2 additional business days for shipping.*

**SPECS:** 7075 T651 aluminum, sealed hardcoat anodized, matte black. Height measured from the top of the rail to the center of the scope.

STOCK #	DIA.	HEIGHT	LENGTH	MOA	PRICE
<b>PICATINNY RAIL MOUNT</b>					
#100-018-266	30mm	1.2"	5"	0	1E00QFF \$ <b>410.00</b>
#100-011-207	30mm	1.2"	5"	20.6	1E00KWM \$ <b>410.00</b>
#100-018-267	30mm	1.3"	5"	0	1E00CTA \$ <b>410.00</b>
#100-018-268	30mm	1.5"	5"	0	1E00JWD \$ <b>410.00</b>
#100-018-269	30mm	1.5"	5"	20	1E00KIC \$ <b>410.00</b>
#100-018-270	34mm	1.2"	4.7"	0	1E00CAE \$ <b>410.00</b>
#100-011-208	34mm	1.2"	4.7"	20.6	1E00PCP \$ <b>410.00</b>
#100-018-271	34mm	1.2"	4.7"	31	1E00IWR \$ <b>410.00</b>
#100-018-272	34mm	1.2"	4.7"	44.4	1E00EYA \$ <b>410.00</b>
#100-018-273	34mm	1.3"	4.7"	0	1E00MZE \$ <b>410.00</b>
#100-018-274	34mm	1.5"	4.7"	0	1E00MSE \$ <b>410.00</b>
#100-018-275	34mm	1.5"	4.7"	10.3	1E00HAS \$ <b>410.00</b>
#100-018-276	34mm	1.5"	4.7"	30	1E00JZH \$ <b>410.00</b>
#100-018-277	34mm	1.5"	4.7"	44.4	1E00IQK \$ <b>410.00</b>
#100-018-278	34mm	1.5"	5.8"	20.6	1E00PDR \$ <b>410.00</b>
#100-018-279	34mm	1.5"	5.8"	20.6	1E00EFK \$ <b>410.00</b>
#100-018-280	34mm	1.5"	5.8"	40	1E00IUI \$ <b>410.00</b>
#100-018-282	34mm	1.7"	4.7"	0	1E00ERP \$ <b>410.00</b>
#100-018-283	34mm	1.9"	4.7"	0	1E00DMB \$ <b>410.00</b>
#100-018-284	34mm	1.9"	4.7"	44.4	1E00AGM \$ <b>410.00</b>
#100-018-285	35mm	1.2"	5.5"	0	1E00EHI \$ <b>410.00</b>
#100-018-286	35mm	1.2"	5.5"	20.6	1E00JEF \$ <b>410.00</b>
#100-018-287	35mm	1.3"	5.5"	0	1E00BFB \$ <b>410.00</b>
#100-018-288	35mm	1.5"	5.5"	0	1E00EJR \$ <b>410.00</b>
#100-018-290	35mm	1.2"	5"	0	1E410J00 \$ <b>410.00</b>
#100-018-291	35mm	1.5"	5.5"	0	1E410M00 \$ <b>410.00</b>
#100-018-293	35mm	1.2"	5.5"	20.6	1E410M00 \$ <b>410.00</b>
#100-011-209	38mm	1.5"	4.7"	20.6	1E00KSI \$ <b>410.00</b>
<b>PICATINNY (AR) CANTILEVER MOUNT</b>					
#100-018-297	30mm	1.26"	5.5"	0	1E00EMK \$ <b>410.00</b>
#100-018-295	30mm	1.46"	5.9"	0	1E00PHM \$ <b>450.00</b>
#100-018-298	34mm	1.26"	5.5"	0	1E00KKC \$ <b>410.00</b>
#100-018-296	34mm	1.46"	5.9"	0	1E00DAF \$ <b>450.00</b>
#100-018-263	30mm	1.4"	4.9"	20.6	1E00CLM \$ <b>410.00</b>
#100-011-211	34mm	1.4"	5.9"	20.6	1E00DPH \$ <b>450.00</b>
<b>ACCURACY INTERNATIONAL DIRECT MOUNT</b>					
#100-018-261	34mm	1.4"	4.7"	20.6	1E00KGA \$ <b>410.00</b>
#100-018-262	34mm	1.4"	4.7"	44.4	1E00BLB \$ <b>410.00</b>

**SOUTH SHORE TARGET SCOPE BASE**



**Mount Target Sights Or External Adjustment Scopes On Long Range Rifles**

Versatile, steel bases accept target front sights and external adjustment scopes from Lyman, Unertl and others that require a 3/8" dovetail base. Contoured bottom radius provides a tight fit to barrel, prevents side movement. Does not fit Redfield external adjustment scopes. **SPECS:** 1018 steel, blue, matte finish. 1 1/8" (3.5cm) long, 3/8" bottom radius. .860" and .562" hole spacings. Includes 6-48 screws.

STOCK #	HEIGHT	PRICE
#841-105-175	.175" Base	1D1199 \$ <b>15.99</b>
#841-105-225	.225" Base	1D1104 \$ <b>12.99</b>
#841-105-275	.275" Base	1D12174 \$ <b>14.99</b>
#841-105-325	.325" Base	1D11D99 \$ <b>15.99</b>
#841-105-425	.425" Base	1D12E74 \$ <b>14.99</b>

**ULTIMAK M14/M1A/M1 GARAND FORWARD OPTIC MOUNT**



**For Easy Forward Mounting Of Optics**

One-piece aluminum Picatinny rail mount replaces the handguard - no gunsmithing! - to give your rifle a mounting platform for an intermediate eye relief scope, red dot, holographic or reflex sight. Low profile enables co-witnessing of the factory sights with red dot sights. Recoil lug, plus dual clamps attach quickly to any standard weight barrel without modifications. Mount remains in place during field stripping. **SPECS:** Aluminum, hardcoat anodized, matte black. Mounting hardware and instructions included. **M14/M1A** - 12 1/8" (31.9cm) long. 12.4 oz. (352 g) wt. Fits M14/M1A family of rifles. **M1 Garand** - 9 1/4" (23cm) long. 6.5 oz. (184g) wt.

#100-002-948	M14/M1A Forward Optic Mount, 5K195L69	\$ <b>205.99</b>
#100-007-347	M1 Garand Forward Optic Mount, 5K182P39	\$ <b>191.99</b>

**ULTIMAK M1 CARBINE M6-B FORWARD OPTIC MOUNT**



**Cantilever Design Mounts Scopes & Optics To Your .30 Carbine**

Get the full accuracy potential from your M1 Carbine by replacing its handguard with a reliable, CNC-machined mount for extended eye relief scopes, red dot, reflex, and laser sights, or tactical accessories. Low profile rail uses 1913 Picatinny pattern; provides excellent stability. Dual, high-strength, steel clamps secure mount to barrel, forward of the gas block. No need to remove standard issue iron sights and will not interfere with case ejection. **SPECS:** Mount - 6061-T6 aluminum, hard anodized, matte black. 8 1/8" (20.5cm) long. Clamps - 4140 steel, matte blue. Fits standard, G.I. pattern, M1 carbines without alteration. May require minor stock inletting on synthetic and I.A.I. stocks. Will not fit Universal brand carbines. #100-001-780 M6-B Forward Optic Mount, 5K93D09 . . \$ **97.99**

**ULTIMAK AK-47 SCOPE MOUNT**

**Low Mount Lets You Use Optics Or Iron Sights**



Lightweight, aluminum mount replaces the gas tube to maintain scope alignment and prevent shifting zero. Weaver-style base sets below the line of sight, no need to remove mount to use iron sights. Issue sights can be viewed directly through the red dot and reflex scopes. **SPECS:** 6061-T6 Aluminum, black, matte finish. 6 1/8" (17.5cm) long. 6.7 oz. (189 g) wt. Fits all 7.62x39 caliber rifles. Installation may require minor inletting to handguard.

**#100-000-497 AK-47 Scope Mount, 5K100G69 . . \$ **105.99****

**TACTICAL SOLUTIONS RUGER® 10/22® PICATINNY SCOPE MOUNT**

**Standard & 15 MOA Models**



Precision CNC machined from light-weight, 6061 T6 aluminum with MIL-STD 1913 Picatinny rail pattern allows mounting a variety of sights. Easily accommodates different-length scope bodies and provides generous adjustment for eye relief. Drilled to fit the factory hole spacing and includes mounting screws. Accepts both Picatinny and Weaver-style rings. Hardcoat anodized for durability. Available with 0 MOA base, or 15 MOA base to help maintain your scope's full elevation adjustment range when shooting at long range. **SPECS:** 6061 T6 aluminum, hardcoat anodized, black, matte finish. 4 1/8" (11.7cm) long, 1/2" (2.1cm) wide, 1/2" (8.7mm) high from top of receiver.

#100-003-819	0 MOA Scope Mount, 8K00CMG	\$ <b>28.00</b>
#100-003-820	15 MOA Scope Mount, 8K00NFJ	\$ <b>30.00</b>


**ACCESSORY INTERFACE MOUNTS**

Mounts allow you to customize your Spuhr mounts and scope rings. With the addition of sights or other accessories. Compact Spacers permit secondary sights or other accessories to be positioned at the optimum height. The **Angle Cosine Indicator** attaches directly to the mount and is available in a QD model that can be removed during CQB or similar situations. **Red Dot Interface** allows you to directly mount a holographic sight to the top or side of the ISMS. The short **Picatinny Rail** sections mount directly to the ISMS and provide a platform for attaching additional accessories. *Ships directly from manufacturer. Please allow 10 additional business days for shipping.* **SPECS:** 7075 aluminum, hardcoat anodized, matte black.



#100-018-250	4mm Spacer, 1E00GXG	\$ <b>30.00</b>
#100-018-251	10mm Spacer, 1E00ALG	\$ <b>30.00</b>
#100-018-255	ACI Interface for QD, 1E00NRD	\$ <b>119.00</b>
#100-018-256	ACI Interface Non QD, 1E00ANE	\$ <b>73.00</b>
#100-018-257	Delta Point Interface, 1E00ARA	\$ <b>62.50</b>
#100-018-258	Delta Point Interface, 1E00QBQ	\$ <b>62.50</b>
#100-018-259	DR-Burris Interface, 1E00LYN	\$ <b>62.50</b>
#100-018-260	Aimpoint Micro Interface, 1E00EXP	\$ <b>73.00</b>
#100-018-252	.39" H x 2.16" L Picatinny Rail, 1E00IXI	\$ <b>62.50</b>
#100-018-253	.55" H x 2.95" L Picatinny Rail, 1E00IMR	\$ <b>62.50</b>
#100-018-254	.79" H x 2.95" L Picatinny Rail, 1E00GWC	\$ <b>62.50</b>

**NEW! ULTIMAK AK-47 & YUGO M70 SCOPE MOUNT**



**Low Mount Lets You Use Optics Or Iron Sights**

A rock-solid platform for an optic. Lightweight, aluminum mount replaces the gas pistol tube and clamps directly to barrel to maintain scope alignment and prevent shifting zero.

Weaver-style base sets below the line of sight, no need to remove mount to use iron sights. Issue sights can be viewed directly through the red dot and reflex scopes. **Yugo M70 Forward Optic Mount** fits M70, M70A, M70AB, M70AB2, NPAP, OPAP rifles. Does NOT fit M72 and AK pistols. With its rail positioned well below the iron sights, this is the lowest optic mount available for the M70 series. You will be able to use your optic without a cheek riser and still maintain your regular head position. Tubular bodied 1x sights, such as Aimpoint or Tripower, will co-witness with iron sights. One-piece 6061 T6 aluminum body with hardcoat anodized finish. Comes with 4140 steel clamps, screws, Allen wrench, and instructions. **SPECS:** 6061 T6 Aluminum, hardcoat anodized, matte black finish. Installation may require minor inletting to handguard. **AK-47** - 6 1/8" (17.5cm) long. 6.7 oz. (189 g) wt. Fits all 7.62x39 caliber rifles. **Yugo M70** - 7.515" long. Fits M70, M70A, M70AB, M70AB2, NPAP, OPAP & similar rifles. NOT for M72 or AK pistol.

#100-000-497	AK-47 Scope Mount, 5K100G69	\$ <b>105.99</b>
#100-042-631	Yugo M70 Forward Optic Mount, 7G100B00	\$ <b>106.99</b>

**ULTIMAK MINI-14®/MINI THIRTY® SCOUT SCOPE MOUNT**



**Use Iron & Optic Sights Without Reconfiguration**

Low profile mount clamps directly to the barrel for added stability. Positioned below the line of sight - no need to use a raised cheekpiece for proper hold. MIL STD 1913 Picatinny rail. No gunsmithing, drop-in installation. **SPECS:** 7075-T6 aluminum, Mil-Spec hardcoat anodized, matte black finish. Includes mounting screws and illustrated instructions. **Mini-14** - 10 1/8" (26.4cm) long. Fits Standard and Ranch rifles. Fits rifles with pre-580 serial number prefix. **Mini Thirty** - Fits all Mini Thirty rifles manufactured before 2008 with factory original barrel. **Late Model 14/Thirty** - Fits Mini-14 rifles made since 2008 and Mini Thirty rifles from early production to present, both with factory original barrels.

#100-000-960	Mini-14 Scout Mount, 5K136B79	\$ <b>143.99</b>
#100-002-790	Mini Thirty Scout Mnt, 5K131K09	\$ <b>137.99</b>
#100-009-314	Late-Model Mini-14/Thirty Scout Mount, 5K136B79	\$ <b>143.99</b>

**GUARANTEED. FOREVER.® SINCE 1939**

## WEAVER REMINGTON 700 TACTICAL MULTI-SLOT SCOPE BASE

Increases Mounting Options  
For Hunting Or Tactical Rifles



One-piece, precision machined Weaver rail lets you mount scopes, red-dot sights, ghost-ring sights, and other optics using Weaver-style rings. Plenty of cross-slots allow optimal ring spacing for a wide range of scopes including compact, full-size, and extra-long scope tubes. Low-profile, open center design allows use of front sight when optics are removed. Lightweight aluminum reduces weight without compromising strength. Hardcoat anodized for additional strength and wear resistance. Attaches to factory drilled and tapped receivers using the included steel mounting screws.

**SPECS:** Aluminum, anodized finish, matte black. Steel mounting screws. **Short Action (SA)** - 5/8" (14.9cm) long. **Long Action (LA)** - 6/4" (15.8cm) long. Fits Rem 700, 78, 40X-L, 721, and 725. Accepts Weaver-style rings.

**#955-000-137** Rem. 700 SA Base, 5E00EPK ..... \$18.99  
**#955-000-136** Rem. 700 LA Base, 5E00CVC ..... 18.99

## WEIGAND COMBAT RUGER® RIFLE ONE-PIECE SCOPE MOUNT



Lots of Slots for Flexible Ring  
Spacing; Drop-On Installation

Provides additional flexibility when mounting shorter scopes or electronic sights. Requires no modifications to gun; quickly attaches to Mini-14® Ranch Rifle, Mini Thirty®, PC9/PC40 carbines, Deerfield carbine, and 10/22® Magnum. Positions the scope low over the receiver for improved balance and better eye alignment. Lightweight aluminum keeps weight to a minimum. Accepts Picatinny rings.

**SPECS:** Aluminum, black anodized finish. 5" (12.7cm) long. 2.6 oz. (74 g) wt. **#957-000-053** Picatinny Rifle Mount, 7E46K79 ..... \$51.99

**77/22® PICATINNY SCOPE MOUNT** - Machined aluminum mount installs easily on your rifle's receiver. Made to Picatinny specifications to give you a rugged, stable platform for your optics. Eleven cross slots ensure optimum scope placement for perfect eye relief. Screw holes line up precisely with factory receiver scope base hole pattern for quick, simple installation. Accepts Picatinny or Weaver-style rings.

**SPECS:** Aluminum, black, matte, anodized finish. 5/8" (13cm) long, 1/2" tall from top of receiver. Screws included.

**#957-000-077** 77/22 Pic Scope Base, 7E56F04 ..... \$58.99

**77/22® & 77/44® SCOPE MOUNT** - Clamps to factory ring cuts; keeps mounting height low and over the receiver. Lots of slots for Weaver-style rings. **77/22** fits .22 LR and .22 Magnum. **77/44** also fits 77/22 Hornet.

**SPECS:** Aluminum, black or silver, matte finish. 5" (12.7cm) long.

**#957-000-046** 77/22 Scope Mount, Black, 7E46H79 ... \$51.99  
**#957-000-047** 77/22 Scope Mount, Silver, 7E46F79 ... 51.99  
**#957-000-056** 77/44 Scope Mount, Black, 7E46K79 ... 51.99

## YANKEE HILL MACHINE AR-15/M16/AR-308 SCOPE RISER

Minimalist Design  
Raises Optics 1/2"



This streamlined mount raises any scope or red dot sight 1/2" for easier eye alignment without adding needless bulk or weight to

## XS SIGHT SYSTEMS SCOUT SCOPE MOUNT

Provides Wide Field Of View  
& Fast Targeting



Puts a long eye relief scope just ahead of the receiver. Attaches with two screws and accepts Weaver-style rings. Models **099** fits large-ring Mauser 98 military barrels (.980" O.D. just forward of receiver) and requires Acraglas® for installation (included). For commercial bolt action sporters with tapered barrels, order **106** mount; requires turning barrel to 1.05" dia. for a minimum length of 1 1/4" forward of the receiver.

**SPECS:** 6063 T6 Aluminum, black, anodized finish. 6" (15.2cm) long. 3.2 oz. (90 g) wt. Includes instructions. Measure barrel just forward of receiver for fitting.

**#006-109-099** 099 Military Mount, 6K60C79 ..... \$63.90  
**#006-109-106** 106 Sporter Mount, 6K60K79 ..... 63.90

## XS SIGHT SYSTEMS LEVER ACTION LEVER SCOUT MOUNT™



Mounts Scope Over Barrel  
For Fast Sighting

Lightweight, Weaver-style mount positions an extended eye relief scope forward of the receiver for quick, both-eyes-open sighting. Weaver-style base features multiple cross slots for attaching a wide range of electronic and optical sights. Mounts to existing holes and rear sight dovetail. Sets low to allow use of iron sights without removing mount. Requires no modifications to rifle. Marlin models available for **1895** Guide Gun, **1894** and **336** rifles. Winchester fits Model 94's with rear sight dovetail 4" forward of receiver.

**SPECS:** Aluminum, black, matte finish. 8" (20.3cm) long. Includes instructions, plastic punch, hex wrench and Loctite®. Winchester also includes bedding compound.

**#006-000-020** Marlin 1895 Scout Mount, 6K57P59... \$63.90  
**#006-000-031** Marlin 1894 Scout Mnt, 6K57P59... 63.90  
**#006-000-032** Marlin 336 Scout Mount, 6K57H59... 63.90  
**#006-000-035** Winchester 94 Scout Mnt, 6K61J19... 67.50

## XS SIGHT SYSTEMS RUGER GSR RUGER SCOUT RIFLE RAIL

Rugged, Full-Length  
Rail With Open Sight  
For The GSR



This full-length, Picatinny rail bolts right on to the Ruger GSR Scout Rifle (GSR) without any gunsmithing required. The rugged, 11 1/2" rail provides a stable platform for standard optics over the receiver or for Intermediate Eye Relief scopes mounted farther forward in the classic scout configuration preferred by Jeff Cooper. A built-in, adjustable rear aperture sight provides a handy backup in case the primary optic fails. Fits Ruger GSR only.

**SPECS:** Aluminum, matte black anodized. 11 1/2" length. Includes mounting hardware and threadlocker.

**#006-000-175** Ruger Scout Rifle Rail, 6K84M59 ..... \$93.60

## NEW! XS SIGHT SYSTEMS MARLIN LEVER ACTION LEVER RAIL

Provides Flexible Mounting  
Of Optics & Sights



Lightweight scope rail mounts to Marlin centerfire lever gun without drilling and trapping. Accepts Weaver-style or Picatinny accessories, including the Marlin 1894, 1895 or Marlin 336/308MX Lever Rail Ghost Ring set (above). Extra-long rail gives plenty of versatility in mounting scope directly over the receiver or forward over the barrel for intermediate eye relief optics or red dot sights. Requires removal of factory rear sight. Gunsmith installation recommended.

**SPECS:** Aluminum, black, matte finish. 11" (27cm) long, .830" (21mm) wide. 3 oz. (85g) wt. Includes mounting hardware.

**#006-000-170** Marlin 1894 Lever Rail, 6K57E59... \$63.90  
**#006-000-151** Marlin 1895 Guide Gun Lever Rail, 6K57K59 ..... 63.90  
**#006-000-165** Marlin 336/308MX Lever Rail, 6K57C59 ..... 63.90

## MARLIN 1894/1895/336/308MX LEVER RAIL SIGHT SYSTEM

Convenient kit combines the lightweight Lever Rail one-piece scope rail with backup iron sights for mounting on your Marlin lever rifle without drilling and trapping. Rear ghost ring is fully adjustable for windage and elevation, with interchangeable .191" and .230" diameter apertures for fine-tuning accuracy. One-piece front sight has .100" wide white-line post.

**SPECS:** Lever Rail - Aluminum, black, matte finish. 11" (27cm) long, .830" (21mm) wide. 3 oz. (85g) weight. Includes mounting hardware. Sights - Steel, matte black finish. Front sight: .100" wide, .528" high measured from top of barrel to top of blade. 1895 fits Marlin 1895 with .700" (17.8mm) and 1" (2.5cm) c-to-c front ramp screws. 336 fits round barrel Model 336 only.

**#006-000-167** Marlin 1894 Lever Rail Sight System, 6K145G80 ..... \$162.00

**#006-000-166** Marlin 1895 Lever Rail Sight System, 6K145A80 ..... 162.00

**#006-000-168** Marlin 336 Lever Rail Sight System, 6K145H80 ..... 162.00

**#006-000-169** Marlin 308MX Lever Rail Sight System, 6K169N57 ..... 179.10

## BADGER ORDNANCE 34 & 35mm TACTICAL RINGS



Easy Installation & Removal;  
Heavy Duty To Stand Up To  
Powerful Recoil

Precision-machined, tactical ring sets provide strong, rigid mounting to securely hold large-diameter scope tubes, like Schmidt & Bender, on hard-recoiling guns. Robust, hex clamping nuts and Weaver-style clamps lock rings tightly on MIL-STD 1913 Picatinny bases. Ring cap is secured with Torx screws. Each set is serial-numbered to guarantee a precision-matched pair.

**SPECS:** 34mm available in 1" (25.4mm), 1.25" (2.9cm) and 1.275" (31.9cm) ring heights. 1" & 1.125" - Steel, matte black oxide finish. 1.275" - MAX-Alloy aluminum, black, matte, anodized finish. Ring heights measured from top of base to inside center of rings. 35mm - Machined aluminum, hardcoat anodized, matte black. Heights listed below.

**#093-000-028** 34mm Rings, 1" High, 3K00JUH ..... \$193.99  
**#093-000-035** 34mm Rings, 1.125" High, 3K00LQQ ... 193.99  
**#093-000-017** 34mm Rings, 1.275" High, 3K00BPF ... 204.99  
**#093-000-043** 35mm Rings, 1.125" High, 3K00DNJ ... 193.99  
**#093-000-044** 35mm Rings, 1.375" High, 3K00QAD ... 193.99

## AMERICAN RIFLE COMPANY M10 SCOPE RINGS

Sometimes You Just Gotta Have  
a Pair To Handle Serious Recoil  
Without Budging



Finding a pair of scope rings that can handle the heaviest-recoiling rifle in your collection without marring or indenting your best scope can be a tough challenge. ARC has you covered with their M10 scope rings designed to do grab the scope tight with their unique hinged "clamshell" ring design - kind of a combination of vertically split and horizontally split rings, and the best of both worlds. ARC's crowned rail interface ensures that each ring correctly engages a Picatinny or STANAG scope base/rail, even if that rail is slightly out of spec. The M10s are machined from 7075 T6 aluminum alloy - known for its combination of exceptional strength and light... well, you get the point. Hardcoat anodized finish on the alloy, plus hardened stainless-steel cross-bolts and locking nuts. So here's a situation where a pair is actually your ace in the hole!

STOCK #	RING SIZE	HEIGHT	PRICE
<b>#100-035-935</b>	30mm	X-Low (0.79")	6R00JRH \$180.00
<b>#100-035-936</b>	30mm	Low (0.94")	6R00IVP \$180.00
<b>#100-035-937</b>	30mm	Medium (1.10")	6R00BDN \$180.00
<b>#100-035-938</b>	30mm	High (1.26") M10	6R00LAQ \$180.00
Scope Rings			
<b>#100-035-940</b>	34mm	Low (0.94")	6R00HTN \$180.00
<b>#100-035-941</b>	34mm	Medium (1.10")	6R00EVI \$180.00
<b>#100-035-942</b>	34mm	High (1.26")	6R00DJQ \$180.00
<b>#100-035-943</b>	34mm	X-High (1.42")	6R00IKG \$180.00
<b>#100-035-944</b>	35mm	Low (0.94")	6R00KDM \$180.00
<b>#100-035-945</b>	35mm	Medium (1.10")	6R00LML \$180.00
<b>#100-035-946</b>	35mm	High (1.26")	6R00KPC \$180.00
<b>#100-035-947</b>	35mm	X-High (1.42")	6R00IJM \$180.00



## BADGER ORDNANCE MAXIMIZED SCOPE RINGS



Extra Strong To Withstand  
Heavy Recoil

Heavy duty 30mm steel rings, machined in pairs, serial numbered, and designed specifically to securely hold large, heavy scopes on hard-recoiling guns. Weaver-style clamp with big 1/2" nut really snugs ring to the mount. Ultra-High provides optimum height for AR-15, AR-10 and SR-25 rifles. **MAX-50** is 1" (2.5cm) wide with six clamping screws. Gives 60% more holding power to keep scopes on .50 BMG rifles. Ring reducers convert 30mm to 1".

**SPECS:** Steel, black, matte finish. Ring height measured from top of mount to center of ring. **Standard** - .823" (2cm), **Medium** - .885" (22.5mm), **Medium High** - 1.0" (2.5cm), **High** - 1.125" (2.8cm), **Ultra High** - 1.378" (3.5cm). **Max-50** - .823" (2cm), **Max-50 High** - 1.125". **Max-50 Ultra-High** - 1 1/8" (3.7cm). **Weights:** Standard - 6.6 oz (187 g), High - 9 oz. (255 g), Ultra High - 10 oz. (284 g), Max-50 - 10.4 oz. (294 g).

**#093-306-080** Standard .823" Scope Ring, 3K165I29 ... \$173.99  
**#093-306-001** Med .885" Scope Ring, 3K165D29 ..... 173.99

**#093-306-002** Med High 1" Scope Ring, 3K165C29... 173.99  
**#093-306-090** High 1.125" Scope Ring, 3K165B29 ... 173.99  
**#093-306-100** Ultra High 1.378" Scope Ring, 3K165M29... 173.99

**#093-306-110** Max-50 Scope Rings, 3K174K79 ..... 183.99  
**#093-000-001** Max-50 High Scope Rings, 3K174F79 ... 183.99  
**#093-000-013** Max-50 Ultra High Scope Rings, 3K174K79 ..... 183.99

**#093-306-120** 1" Standard Ring Reducers, 3K00EDR... 31.99

Orders: 800-741-0015

order on the web  
**brownells.com**

**BROWNELLS** PAGE 269





**BURRIS SIGNATURE RINGS**

**POS-ALIGN Pivoting Synthetic Inserts End Scope Misalignment**

Unique system puts an end to dinged, damaged, and misaligned scope tubes, plus holds scopes firmly against recoil. Steel outer rings with self-centering, synthetic inner rings, adjust to slight mounting variations so any 1" or 30mm scope is perfectly aligned. On bases without windage adjustment you get maximum usage of the scopes' internal windage/elevation adjustment, closer lens alignment, and clear, sharp images.

**SPECS:** Rings - Steel, 1" (2.5cm) and 30mm I.D. Available in polished blue (PB), matte blue (MB), or satin nickel (SIL) silver. Rings sold in pairs and include 1 pair concentric inner rings (inserts). Pos-Align Standard (STD) Rings fit Burris/Leupold/Millett rotary dovetail systems. Pos-Align Zee Rings (ZEE) fit Weaver-style bases. Height shown is from top of base to bottom of ring. 1" Standard Rings: Med - .270" (6.8mm); High - .390" (9.9mm). 1" Zee Rings: Med - .270" (6.9mm); High - .420" (10.7mm). 30mm Standard Rings - Med - .180" (4.6mm); High - .300" (7.6mm); Extra High - .420" (10.7mm). Inserts - Synthetic material, black. 30mm Zee Rings - Med - .200" (5.1mm); High - .325" (8.3mm); Extra High - .580" (14.7mm)

STOCK #	MODEL	FINISH	PRICE
#118-420-401	1" Med.	Matte	8A38H94 \$ 39.99
#118-420-578	30mm Med.	Matte	8A57L59 \$ 61.99
#118-420-411	1" High	Matte	8A38M94 \$ 39.99
#118-420-581	30mm STD	MB	8A57A59 \$ 61.99
#118-420-420	1" Medium	Black	8A44B64 \$ 46.99
#118-420-421	1" Med.	Matte	8A00AY1 \$ 40.99
#118-420-422	1" Med.	Nickle	8A44N64 \$ 46.99
#118-420-430	1" High	Black	8A44N64 \$ 46.99
#118-420-431	1" High	Matte	8A44Q64 \$ 46.99
#118-000-018	30mm Medium	Matte	8A60F29 \$ 64.99
#118-000-017	30mm High	Matte	8A60M29 \$ 64.99
#118-000-004	30mm Extra High	Matte	8A60E29 \$ 64.99

**SIGNATURE OFFSET RING INSERTS** - Pos-Align®, synthetic inserts optically center the internal lenses of your scope for optimal brightness and clarity. Offset design helps correct for slightly misaligned rings caused by off-center receiver holes, bases, or rings. Relieves stress on the scope tube and allows maximum usage of your scope's internal windage/elevation adjustments. Delivers excellent scope-to-ring contact without lapping; plus, prevents dings and marks on the scope tube. Available in pairs or kits. Kit includes one pair each of +/- .005", +/- .010" and +/- .020" inserts.

**SPECS:** Synthetic, black. For 1" rings only.

- #118-626-019 Offset Insert Kit for 1" Rings, 8A14J44. \$ 15.99
- #118-626-017 +/- .010" Offset Inserts, 1 pair, 8A9F89. 9.99
- #118-626-018 +/- .020" Offset Inserts, 1 pair, 8A9P89. 9.99

**EGW PRACTICAL ALUMINUM RINGS**

**Low Profile & High Strength**

Vertically split, low-profile rings clamp to MIL-STD 1913 Picatinny rails or Weaver-style bases and provide an eye-pleasing, streamlined look without compromising strength. Ring halves clamp together with four, steel Allen head screws for a tight hold on optic and rail. Steel cross-bar locks in the rail slot or base to prevent slippage under recoil. Available for 1" and 30mm diameter scope tubes.

- #296-000-161 1" Practical Rings, 6B00DQJ. \$ 54.00
- #296-000-160 30mm Practical Rings, 6B00QZB. 54.00
- Advise # — Two-Piece Base Set, 4K00FVL. \$ 39.99

**BURRIS WEAVER-STYLE "ZEE" RINGS**



**Made Of Steel**

Precision machined STEEL, streamlined rings to fit Weaver style bases. Gives that "custom" look. Elegant, rounded contours. **SPECS:** Steel; polished blue (Pol. Blue), matte blue (Safari) or satin, nickel-plated (Silver). 3 oz. (85g) pair. Height shown is from top of base to inside bottom of ring. 1" (2.5cm) dia.: Low - .135" (3.4mm), Med. - .245" (6.2mm), High - .450" (11.4mm), 30mm (1.1" dia.): High - .460" (11.6mm).

STOCK #	HEIGHT	SIZE	FINISH	PRICE
#118-420-079	Low	1"	Silver	8A31A34 \$ 31.99
#118-420-080	.135"	1"	Black	8A27J89 \$ 29.99
#118-420-083	Low	1"	Safari	8A27H89 \$ 29.99
#118-420-085	Med.	1"	Silver	8A31J34 \$ 31.99
#118-420-081	Med.	1"	Pol. Blue	8A27H89 \$ 29.99
#118-420-084	Med.	1"	Safari	8A27G89 \$ 29.99
#118-420-082	High	1"	Pol. Blue	8A27G89 \$ 29.99
#118-420-077	High	30mm	Matte	8A44I09 \$ 47.99

**BURRIS DELUXE .22 TIP-OFF RINGS**

**All Steel For Full Size Rimfire & Airgun Scopes**

Gracefully contoured, precision-machined, premium steel rings mount 1" scopes on airguns or .22 caliber rimfires with grooved receivers. Blued finish. Fits nominal 1/8" dovetail.

**DELUXE RINGS** - Graceful style and superior strength. Highly polished blued finish.

**SPECS:** Height measured from top of base to bottom of scope tube. Medium - .310" (7.9mm) high. High - .455" (11.6mm) high.

- #118-420-072 Med. .22 Rings, 8A36N09. \$ 36.99
- #118-420-073 High .22 Rings, 8A36H09. 36.99

**SIGNATURE POS-ALIGN RIFLE/AIRGUN RINGS** - 1" rings with self-aligning, synthetic inserts that prevent scope damage from misaligned rings.

**SPECS:** Steel, matte blued finish. High .793" (20.1mm). Fits both nominal 1/8", .22 and 11mm airgun dovetails.

- #118-420-556 MB RF/Airgun Rings, 8A53F99. \$ 57.99

**EGW TACTICAL SCOPE RINGS**


**Machined As A Matched, Serial-Numbered Pair For Precise Alignment**

Heavy duty Picatinny rings are precision machined from solid aluminum billet as matched pairs to aid in obtaining the best possible alignment. Each pair is clamped together and the center holes bored to 30mm to tolerances of +/- .0014", then engraved with matching serial number. In addition, the lower halves are marked to prevent separation from their matched ring caps. All edges are beveled or radiused, including both sides of the steel ring nut, to minimize potential for snagging on other gear. Surfaces are blasted to ensure an even, matte finish, then hard anodized with a durable black finish for added strength and wear resistance. Crossbolt and nut are machined from chrome-moly steel, heat treated for exceptional strength, and blued. Steel, Torx® screws, four per ring, have matching finish. Separately available, precision-machined polymer inserts allow use of these rings with 1" diameter scope tubes.

- SPECS:** Rings - Body: Aluminum, hardcoat anodized, matte black. Crossbolts/Nuts/Cap Screws - Chrome-moly steel, blued. Height from top of base to inside bottom of ring: .400" (10.1mm). Fits scopes with 30mm O.D. tubes. Mounts to MIL-STD 1913 Picatinny bases. Inserts - Machined polymer, black.
- #296-000-109 30mm Tact. Scope Rings, 1 Pair, 6B107C34. \$ 112.50
- #296-000-110 Inserts For 1" Scopes, 1 Pair, 6B13P00. 13.50

**CALCULATING REQUIRED SCOPE RING HEIGHT**

The following formula provides a quick and effective way to determine proper scope ring height for the majority of rifle scope mounting applications. There are a few applications where the barrel contour will allow the scope to be mounted slightly lower than the calculated measurement, and other instances where a heavy barrel equipped with a rear sight may require a slightly higher scope ring height than calculated. An alternative to using the formula provided here is available in the *Determining Scope Ring Height* video at [brownells.com](http://brownells.com).

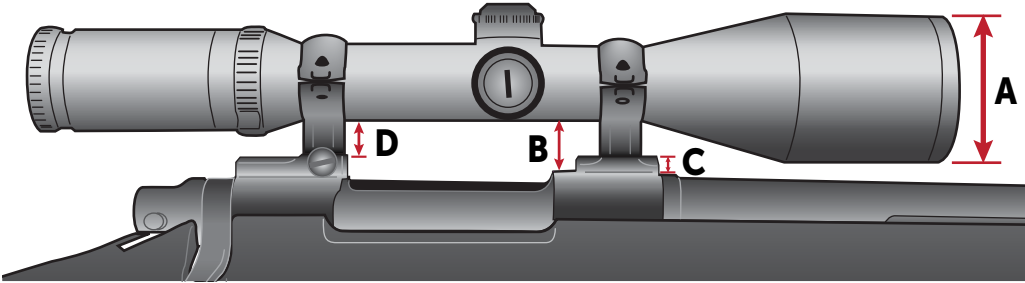

- A** = Outside diameter of scope objective end.
- B** = Distance between top of receiver (where shown) and bottom of scope tube.
- C** = Base Height: Distance from top of receiver to top of front scope base.
- D** = Ring Height: Distance from top of base to bottom of scope tube.

**Scope Ring Height Formula: B - C = D**

**PROCEDURE**

- 1) Measure the outside diameter of the scope objective (A). If using scope covers, make this measurement with the front scope cover in place to ensure proper clearance.
- 2) Find the objective diameter (A) for your scope in the table to the right.
- 3) Find the corresponding scope clearance dimension (B) in the table for the tube diameter (1" or 30mm) of your scope.
- 4) Measure the front base height (C) with a caliper or find this dimension in the manufacturer's literature.
- 5) Subtract the known front base height (C) from dimension (B) to determine the required ring height (D).

Instructional video available at [brownells.com](http://brownells.com)

**\*NOTE:** Subtract known height of the front base from Dimension B in table to determine the actual ring height.

OBJECTIVE DIAMETER	*1" SCOPE TUBE	*30mm SCOPE TUBE
DIMENSION A	DIMENSION B	DIMENSION B
.984" (25mm)	0" (0mm)	---
1.023" (26mm)	.011" (.27mm)	---
1.062" (27mm)	.031" (.78mm)	---
1.102" (28mm)	.051" (1.29mm)	---
1.141" (29mm)	.071" (1.80mm)	---
1.181" (30mm)	.091" (2.31mm)	---
1.220" (31mm)	.111" (2.81mm)	---
1.259" (32mm)	.130" (3.30mm)	---
1.299" (33mm)	.150" (3.81mm)	---
1.388" (34mm)	.169" (4.29mm)	---
1.377" (35mm)	.189" (4.80mm)	---
1.417" (36mm)	.209" (5.30mm)	---
1.456" (37mm)	.228" (5.79mm)	---
1.496" (38mm)	.248" (6.29mm)	---
1.535" (39mm)	.268" (6.80mm)	---
1.574" (40mm)	.287" (7.28mm)	.197" (5.00mm)
1.614" (41mm)	.307" (7.79mm)	.217" (5.51mm)
1.653" (42mm)	.327" (8.30mm)	.237" (6.01mm)
1.692" (43mm)	.346" (8.78mm)	.257" (6.52mm)
1.732" (44mm)	.366" (9.29mm)	.276" (7.01mm)
1.771" (45mm)	.386" (9.80mm)	.296" (7.51mm)
1.811" (46mm)	.406" (10.31mm)	.316" (8.02mm)
1.850" (47mm)	.425" (10.79mm)	.335" (8.50mm)
1.889" (48mm)	.445" (11.30mm)	.355" (9.01mm)
1.929" (49mm)	.465" (11.81mm)	.375" (9.52mm)
1.968" (50mm)	.484" (12.29mm)	.394" (10.00mm)
2.000" (51mm)	.500" (12.70mm)	.414" (10.51mm)
2.047" (52mm)	.524" (13.30mm)	.434" (11.02mm)
2.086" (53mm)	.543" (13.79mm)	.454" (11.53mm)
2.125" (54mm)	.563" (14.30mm)	.473" (12.01 mm)
2.165" (55mm)	.583" (14.80mm)	.493" (12.52 mm)
2.204" (56mm)	.602" (15.29mm)	.513" (13.03mm)
2.244" (57mm)	.622" (15.79mm)	.532" (13.51mm)
2.283" (58mm)	.642" (16.30mm)	.552" (14.02mm)
2.322" (59mm)	.661" (16.78mm)	.572" (14.52mm)
2.362" (60mm)	.681" (17.29mm)	.591" (15.01mm)
2.401" (61mm)	.701" (17.80mm)	.611" (15.51mm)
2.440" (62mm)	.720" (18.28mm)	.631" (16.02mm)
2.480" (63mm)	.740" (18.79mm)	.651" (16.53mm)
2.519" (64mm)	.760" (19.30mm)	.670" (17.01mm)
2.559" (65mm)	.780" (19.81mm)	.690" (17.52mm)

## LEUPOLD BACKCOUNTRY CROSS-SLOT RINGS & BASES

Robust, Easy-To-Install Scope Mounting System With Plenty of Versatility



BackCountry cross-slot bases and matching rings give you excellent versatility in eye relief and ring spacing, without suffering a weight penalty. Like Leupold's BackCountry combo ring/bases, these separates are machined from 7075 T6 aluminum for a superb combination of strength and light weight. Slots are cut to Picatinny specs and will also accept Weaver rings, if you have some old yet still serviceable rings on hand. BackCountry bases are available with both zero elevation or with 20 MOA of built-in elevation for use on long-range rifles or with scopes that have limited internal elevation adjustment. The rings are engineered to make maximum contact with the base for excellent stability without resorting to excess metal that will add bulk and weigh down your rifle. And when you're ready to change scopes... leave the base on your rifle and simply acquire the correct BackCountry rings for your new optic. Rings sold in pairs. Bases come with mounting screws and are drilled to fit factory drilled-and-tapped receiver holes.

- #100-028-737 1" Med. BackCountry Rings, 4K00GKK... \$ 87.99
- #100-028-738 1" High BackCountry Rings, 4K00EPR... 78.99
- #100-028-739 30mm Low BackCountry Rings, 4K00QBN... 87.99
- #100-028-740 30mm Med. BackCountry Rings, 4K00QMH... 87.99
- #100-028-741 30mm High BackCountry Rings, 9Z00JVD... 75.99
- #100-028-742 34mm Med. BackCountry Rings, 4K00JDJ... 75.99
- #100-028-743 35mm High BackCountry Rings, 4K85E7L... 89.99

STOCK #	FITS	TYPE	PRICE
#100-028-715	Browning A-Bolt SA	0 MOA	9Z42B79 \$ 44.99
#100-028-716	Browning A-Bolt SA	20 MOA	9Z42C79 \$ 44.99
#100-028-717	Browning A-Bolt LA	0 MOA	4K42J79 \$ 44.99
#100-028-718	Browning A-Bolt LA	20 MOA	9Z42M79 \$ 44.99
#100-028-719	Browning AB3 SA	0 MOA	9Z42F79 \$ 44.99
#100-028-720	Browning AB3 SA	20 MOA	9Z42K79 \$ 44.99
#100-028-721	Browning AB3 LA	0 MOA	9Z42M79 \$ 44.99
#100-028-722	Browning AB3 LA	20 MOA	4K42K79 \$ 44.99
#100-028-699	Remington 700 SA	0 MOA	4K42P79 \$ 44.99
#100-028-700	Remington 700 SA	20 MOA	4K42L79 \$ 44.99
#100-028-701	Remington 700 LA	0 MOA	4K42Q79 \$ 44.99
#100-028-702	Remington 700 LA	20 MOA	4K42K79 \$ 44.99
#100-028-733	Ruger American SA	0 MOA	9Z42K79 \$ 44.99
#100-028-734	Ruger American SA	20 MOA	9Z42E79 \$ 44.99
#100-028-735	Ruger American LA	0 MOA	4K42J79 \$ 44.99
#100-028-736	Ruger American LA	20 MOA	9Z42B79 \$ 44.99
#100-028-703	Savage 10 Rnd Rec'r SA	0 MOA	9Z42P79 \$ 44.99
#100-028-704	Savage 10 Rnd Rec'r SA	20 MOA	9Z42K79 \$ 44.99
#100-028-705	Savage 110/AXIS Rnd Rec'r SA	0 MOA	4K42N79 \$ 44.99
#100-028-706	Savage 110/AXIS Rnd Rec'r SA	20 MOA	4K42A79 \$ 44.99
#100-028-731	SIG Sauer 202 SA	20 MOA	9Z42A79 \$ 44.99
#100-028-732	SIG Sauer 202 LA	20 MOA	4K42N79 \$ 44.99
#100-028-723	Tikka T3/T3x	0 MOA	4K42F79 \$ 44.99
#100-028-724	Tikka T3/T3x	20 MOA	9Z42B79 \$ 44.99
#100-028-725	Weatherby Mark V LT	0 MOA	9Z42K79 \$ 44.99
#100-028-726	Weatherby Mark V LT	20 MOA	9Z42A79 \$ 44.99
#100-028-727	Weatherby Mark V/Vaguard LA	0 MOA	4K42J79 \$ 44.99



## HAWKINS PRECISION SCOPE RINGS

Solid, Secure Rings for Precision Rifles - Built-In Anti-Cant Level

Hawkins Precision hunting and tactical scope rings come in several flavors to fit different applications in the precision rifle market. They all fit Picatinny rails. **Ultra-Light Tactical Rings** are machined from billet 6061 T6 aluminum and have a corrosion-resistant black anodized finish. The clamp and recoil lug are machined from extra-hard 7075 aluminum to help these rings deliver exceptional strength and grip. The ultra-light design frees you from carrying unnecessary bulk. Come standard with an anti-cant bubble-level cap. **Heavy Duty Tactical Rings** are extremely robust rings machined from a single billet 6061 aluminum with a six-screw cap design for a vise-like grip on the scope. That scope ain't slipping around in these rings! Includes anti-cant bubble level AND a Picatinny accessory rail on top. **Long-Range Hybrid Rings** for the Tikka T3/T3x are direct-mount rings that provide an excellent balance of strength and light weight. Built-in 25 MOA elevation keeps you from maxing out your hunting rifle's internal elevation adjustment. Also machined from a single billet of 6061 aluminum, with the anti-cant level cap.



- #100-043-509 35mm Ultra Light Tactical Rings - .885", 7E141P59... \$ 149.00
- #100-043-510 35mm Ultra Light Tactical Rings - 1.0", 8F141Q59... 149.00
- #100-043-511 35mm Ultra Light Tactical Rings - 1.25", 9G141R59... 149.00
- #100-043-512 35mm Ultra Light Tactical Rings - 1.375", 1H141S59... 149.00
- #100-043-513 35mm HD Scope Rings w/Rail - 1.0", 2J198T59... 209.00
- #100-043-514 35mm HD Scope Rings w/Rail - 1.15", 3K198U59... 209.00
- #100-043-515 36mm HD Scope Rings w/Rail - 1.0", 4L198V59... 209.00
- #100-043-516 36mm HD Scope Rings w/Rail - 1.15", 5M198W59... 209.00
- #100-043-517 Tikka 30mm 25 MOA Rings - 0.5", 6N107X09... 119.00
- #100-043-518 Tikka 30mm 25 MOA Rings - 0.6", 7P107Y09... 119.00
- #100-043-519 Tikka 34mm 25 MOA Rings - 0.55", 8Q107Z09... 119.00
- #100-043-520 Tikka 34mm 25 MOA Rings - 0.65", 9R107A09... 119.00

STOCK #	FITS	TYPE	PRICE
#100-028-728	Weatherby Mark V/Vaguard LA	20 MOA	4K42C79 \$ 44.99
#100-028-729	Weatherby Vanguard SA	0 MOA	4K42L79 \$ 44.99
#100-028-730	Weatherby Vanguard SA	20 MOA	4K42C79 \$ 44.99
#100-028-707	Winchester 70 SA	0 MOA	9Z42J79 \$ 44.99
#100-028-708	Winchester 70 SA	20 MOA	9Z42Q79 \$ 44.99
#100-028-709	Winchester 70 LA	0 MOA	9Z42M79 \$ 44.99
#100-028-710	Winchester 70 LA	20 MOA	4K42C79 \$ 44.99
#100-028-711	Winchester XPR SA	0 MOA	4K42Q79 \$ 44.99
#100-028-712	Winchester XPR SA	20 MOA	9Z42H79 \$ 44.99
#100-028-713	Winchester XPR LA	0 MOA	9Z42J79 \$ 44.99
#100-028-714	Winchester XPR LA	20 MOA	9Z42K79 \$ 44.99

## LEUPOLD TWO-PIECE RIFLE BASE SETS

Two-piece base sets, CNC machined to exacting tolerances, provide rock solid scope mounting. Reversible and long rear bases make it easy to use standard rings to mount scopes, from extra long varmint and target models to small compacts on any length action. Front bases accept Leupold's (and Burris/Redfield/Millett) rotary dovetail ring. The rear base uses standard Leupold/Burris/Redfield windage, screw-secured ring. **SPECS:** 12L14 Cold Rolled Steel. Polished blue (Gloss), Matte blue (Matte), or Satin nickel (Silver) finish. Includes 2 bases with TORX screws. (RF) Reversible front base. (RR) Reversible rear base.



RIFLE MODEL	STK# GLOSS	STK# MATTE	STK# SILVER
Austin & Halleck	#526-500-320	NA	NA
Browning FN action	#526-370-070	#526-462-900	NA
FN action RF	#526-370-080	NA	NA
A-Bolt long rear base	#526-417-770	#526-462-970	#526-451-570
A-Bolt Std. rear base	#526-492-250	NA	NA
A-Bolt WSSM	NA	#526-000-076	NA
X-Bolt	#526-000-103	#526-000-102	#526-000-104
BLR Lightning	#526-502-370	#526-502-380	NA
BR 1885 Hi-Wall (Will not fit BPCR, Traditional)	#526-492-220	NA	NA
BSA Monarch	#526-370-030	#526-476-640	NA
BR 1885 Low-Wall (Will not fit BPCR, Traditional)	#526-512-600	NA	NA
Monarch RF	#526-370-040	NA	#526-463-010
AB3 RVF	NA	#526-000-303	NA
Harrington & Richardson 300, 301, 330, 370 (FN Mauser)	#526-370-070	#526-462-900	NA
H&R (FN Mauser) RF	#526-370-080	NA	NA
JC Higgins Model 51	#526-370-070	#526-462-900	NA
Model 51 RF	#526-370-080	NA	NA
Kimber 84	NA	#526-000-108	NA
8400	NA	#526-000-109	NA
Knight Disk, Wolverine	#526-000-029	NA	NA
Marlin 455	#526-370-070	#526-462-900	NA
455 RF	#526-370-080	NA	NA
Model 7	#526-370-050	#526-462-800	NA
Model 7 RF/RR	#526-370-060	NA	NA
Mauser FN, Mark X, Parker Hale	#526-370-070	#526-462-900	NA
Mauser RF	#526-370-080	NA	NA
Swedish M-96	NA	#526-512-630	NA
Mauser '98	NA	#526-000-075	NA
Remington Model 7	#526-512-560	NA	NA
700, 721, 725, 40-X, 700BP	#526-370-030	#526-476-640	NA
700 RF	#526-370-040	#526-000-030	#526-463-010
710	NA	#526-541-000	NA
541	#526-000-029	NA	NA
Ruger M-77 round action	#526-370-030	#526-476-640	NA
Model 77 RF	#526-370-040	NA	#526-463-010
Sako round action	#526-370-070	#526-462-900	NA
Sako RF	#526-370-080	NA	NA
Savage 10/110, 16/116 w/ Accu-Trigger; also fits Edge	#526-000-072	#526-000-073	#526-000-074
S&W 1500	#526-370-030	#526-476-640	NA
1500 RF	#526-370-040	NA	#526-463-010
Tikka Whitetail Hunter	#526-000-056	NA	NA
Weatherby FN action	#526-370-070	#526-462-900	NA
FN action RF	#526-370-080	NA	NA
Vanguard	#526-370-030	#526-476-640	NA
Vanguard RF	#526-370-040	NA	#526-463-010
Mk V	#526-517-000	#526-517-010	NA

## LEUPOLD BACKCOUNTRY RING+BASE COMBINATION MOUNTS

Lightest Weight, Most Compact Scope Mounting System



Leupold's minimalist mounts are designed specifically for folks who are traveling deep into the back country - but still need a scope on their rifles. When you're on a long trek on foot, every extra ounce can feel like a ton of extra weight. OK, maybe we exaggerate a bit, but BackCountry mounts are scope rings with the bases built right in. All you need is a pair of these mounts to securely anchor your scope to your bush rifle, and you're ready to hit the trail - without sacrificing performance for weight reduction. These are still Leupold mounts, so they provide rock solid attachment for your scope. Machined from exceptionally strong and lightweight 7075 T6 aluminum billet, with a tough matte black hard-anodized finish. AND they're easy to install on your factory drilled-and-tapped receiver using the included mounting screws. When ounces matter as much as performance, you need a set of BackCountry mounts.

STOCK #	FITS	HEIGHT	SIZE	PRICE
#100-028-683	Browning AB3	Medium	1"	4K00HTQ \$ 84.99
#100-028-684	Browning AB3	High	1"	4K00KAA \$ 84.99
#100-028-685	Browning AB3	Medium	30mm	4K00CXR \$ 84.99
#100-028-686	Browning AB3	High	30mm	4K00PKE \$ 84.99
#100-028-691	Browning X-Bolt	Medium	1"	4K00ELA \$ 84.99
#100-028-692	Browning X-Bolt	High	1"	4K00JJJ \$ 84.99
#100-028-693	Browning X-Bolt	Medium	30mm	4K00A5G \$ 84.99
#100-028-694	Browning X-Bolt	High	30mm	4K00BCN \$ 84.99
#100-028-671	Remington 700	Medium	1"	4K00CBI \$ 84.99
#100-028-672	Remington 700	High	1"	9Z00NPB \$ 84.99
#100-028-673	Remington 700	Medium	30mm	4K00KHK \$ 84.99
#100-028-674	Remington 700	High	30mm	4K00LBD \$ 84.99
#100-028-675	Savage 10/110 Rnd Rec'r	Medium	1"	4K00NSJ \$ 84.99
#100-028-676	Savage 10/110 Rnd Rec'r	High	1"	9Z00QYJ \$ 84.99
#100-028-677	Savage 10/110 Rnd Rec'r	Medium	30mm	9Z00FHB \$ 84.99
#100-028-678	Savage 10/110 Rnd Rec'r	High	30mm	4K00GZM \$ 84.99
#100-028-679	Tikka T3/T3x Hunter	Medium	1"	4K00EGP \$ 84.99
#100-028-680	Tikka T3/T3x Hunter	High	1"	4K00KYC \$ 84.99
#100-028-681	Tikka T3/T3x Hunter	Medium	30mm	4K00GMP \$ 84.99
#100-028-682	Tikka T3/T3x Hunter	High	30mm	9Z00KTP \$ 84.99
#100-028-695	Weatherby Mk V	Medium	1"	4K00ECM \$ 84.99
#100-028-696	Weatherby Mk V	High	1"	4K00LNL \$ 84.99
#100-028-697	Weatherby Mk V	Medium	30mm	4K00KMC \$ 84.99
#100-028-698	Weatherby Mk V	High	30mm	4K00BNH \$ 84.99
#100-028-687	Winchester 70	Medium	1"	4K00JUS \$ 84.99
#100-028-688	Winchester 70	High	1"	4K00NYH \$ 84.99
#100-028-689	Winchester 70	Medium	30mm	4K00QCB \$ 84.99
#100-028-690	Winchester 70	High	30mm	4K00MRK \$ 84.99

RIFLE MODEL	STK# GLOSS	STK# MATTE	STK# SILVER
Mk V RF	NA	#526-517-030	NA
Winchester 70 RR	#526-370-050	#526-462-800	NA
Win. 70 RF / RR Post '64 Model 70, 70A, 670, 770 and Pre-'64 Model 70 Serial# above 66, 360 - except 70 Express, H&H magnum actions	#526-370-060	#526-000-031	NA
94 Angle Eject	#526-000-032	NA	NA
Ruger American™ Round Rcrv	NA	#526-000-302	NA

— Advise # — Two-Piece Base Set, 4K00FVL... \$ 39.99

Orders: 800-741-0015

order on the web  
**brownells.com**

**BROWNELLS** PAGE 271

RINGS & BASES

RIFLE



**LEUPOLD ONE-PIECE BASE**



Carefully machined from cold-rolled, steel bar stock, featuring generous windage adjustments for rear ring and precision fitted rotary dovetail

for front ring. Note: "STD" Mount Bases accept Burris, Millett and Redfield rotary dovetail rings. ■  
 SPECS: 12L14 cold rolled steel. Polished Blue (PB), Matte blue (MB), Satin nickel (SIL) finish. Long Range (LR) gives additional elevation. All include TORX mounting screws.

RIFLE MODEL	ACTION	FINISH	STOCK #
<b>BROWNING</b>			
FN action	Long	PB	#526-261-620
A-Bolt	Short	MB	#526-000-034
A-Bolt	Long	MB	#526-000-035
BAR semi auto		PB	#526-261-630
BLR lever action pre-'96		PB	#526-261-640
<b>BSA</b>			
Monarch right hand	Short	PB	#526-261-670
Monarch right hand	Long	PB	#526-261-660
<b>HARRINGTON &amp; RICHARDSON</b>			
	Long	PB	#526-261-620
<b>HOWA</b>			
1500	Long	PB	#526-261-660
<b>HUSQVARNA</b>			
Crown Grade & Carl Gustaf		PB	#526-261-720
<b>JC HIGGINS</b>			
Model 51		PB	#526-261-720
Model 53	Long	PB	#526-261-620
<b>MARLIN</b>			
36 / 336		PB	#526-261-650
Model 455	Long	PB	#526-261-620
Model 7	Long	PB	#526-261-700
<b>MAUSER</b>			
FN & Mk X, Parker Hale		PB	#526-261-620
Unaltered Large Ring 98		PB	#526-261-730
<b>MOSSBERG</b>			
1500 / 1700	Long	PB	#526-261-660
Model 1500 / 1700	Short	PB	#526-261-670
<b>REMINGTON</b>			
Model 4, 6, 7400, 7600		PB	#526-349-200
Model 4, 6, 7400, 7600		MB	#526-000-001
700, 721, 725, 40-X right hand	Long	PB	#526-261-660
700, 721, 725, 40-X right hand	Long	MB	#526-000-036
700 left hand	Long	PB	#526-263-160
700 matte LR long range	Long	MB	#526-517-320
700 silver LR long range	Long	SIL	#526-517-330
7, 700, 721, 725, 40-X right hand	Short	PB	#526-261-670
700 matte	Short	MB	#526-500-060
700 silver	Short	SIL	#526-501-610
700 matte LR long range	Short	MB	#526-517-340
600, 660, XP-100 single shot	Short	PB	#526-261-670
740, 742, 760		PB	#526-261-680
<b>RUGER</b>			
10/22		PB	#526-322-620
10/22		MB	#526-517-230
10/22		SIL	#526-517-240
M-77 round action	Long	PB	#526-261-660
<b>SAKO</b>			
Round action		PB	#526-261-620
<b>SAVAGE</b>			
110 thru 116 right hand	Long	PB	#526-290-980
110 thru 116 left hand	Long	PB	#526-502-190
110 thru 116, right hand w/AccuTrigger	Long	PB	#526-000-065
10 thru 16, right hand w/AccuTrigger	Short	PB	#526-000-068

**LEUPOLD MARK 4 RINGS**



Rock-Solid, Heavy-Duty Mounts For Extreme Field & Tactical Use

Heavy-duty rings are built to withstand extreme service without movement or loss of zero. Larger contact area between the scope/rings and base/receiver for less chance of movement. Large hex nuts on rings allow fast torquing of cross bolts for easy adjustment. Non reflective, matte finish. Mounting screws and Torx® head wrench included. **Steel Rings** - CNC machined from solid 11L17 cold-rolled bar stock, then blued. **Aluminum Rings** - CNC machined from 7075 T651 aluminum alloy and hardcoat anodized for maximum strength and wear resistance. ■

SPECS: Steel or aluminum, matte black finish 1" (2.5cm) or 30mm (1.18") inside diameter. Height from top of base to center of ring for both 1" and 30mm: Med. -.84" (2.1cm); High - 1.06" (2.7cm); Super High - 1.4" (3.5cm).

#526-000-085	1" Medium, Aluminum Rings, 4K151G04	\$ 158.99
#749-008-006	1" Medium, Steel Rings, 4K141K54	148.99
#749-008-007	30mm Medium, Steel Rings, 4K00GDI	142.99
#526-502-220	1" Super High, Steel Rings, 4K00GAM	144.99
#526-000-086	1" Super High, Aluminum Rings, 4K00HDB	144.99
#526-000-082	30mm Medium, Aluminum Rings, 4K154L79	171.99
#526-000-053	30mm High, Steel Rings, 4K00FPO	142.99
#526-000-083	30mm High, Aluminum Rings, 4K00EFE	144.99
#526-520-830	30mm Super High, Steel Rings, 4K141E54	148.99
#526-000-084	30mm Super High, Aluminum Rings, 4K00NEQ	144.99
#526-000-304	34mm High, Aluminum Rings, 4K165E29	173.99
#526-000-305	35mm High, Aluminum Rings, 4K155K71	162.99

RIFLE MODEL	ACTION	FINISH	STOCK #
10 thru 16, right hand w/AccuTrigger	Short	MB	#526-000-069
10 thru 16, right hand w/AccuTrigger		PB	#526-261-690
<b>S&amp;W</b>			
1500 early model		PB	#526-261-720
1500 right hand	Long	PB	#526-261-660
<b>SPRINGFIELD</b>			
'03-A3		PB	#526-261-750
<b>WEATHERBY</b>			
FN action		PB	#526-261-620
Vanguard right hand	Long	PB	#526-261-660
<b>WESTERN FIELD</b>			
Model 740		PB	#526-261-650
<b>WINCHESTER</b>			
Model 70	Long	PB	#526-261-700
Model 70	Long	MB	#526-000-037
Model 70 LR long range	Long	MB	#526-517-360
Post '64 Mod. 70, 70A, 670, 770, and Pre '64 Win. Mod 70, Ser. # higher than 66,350 —not including Express H&H magnums—	Short	MB	#526-517-380
— Advise # — One-Piece Base, 9Z00HQS			\$ 39.99
— Advise # — Long Range Base, 9Z00IWA			39.99

**LEUPOLD PRW2 RINGS**

Weaver-Style, All-Steel, For Rock-Solid Mounting



Like the original PRW rings, Leupold's upgraded PRW2 rings are machined from steel barstock to provide the strength and accuracy necessary to hold large objective scopes securely against recoil. Solid steel clamp uses two Torx screws to firmly lock the rings to the base, while the square steel recoil lug holds tightly against movement. Split below the centerline, each ring features four screws that let you tighten the cap without accidentally rotating the scope. As for the upgrades, they are all hidden under the surface, so visually PRW2 rings blend seamlessly with "Gen 1" PRWs. PRW2 rings have an easier-to-install ring cap, plus an improved keeper and a larger contact area with the base for an even more secure installation, while you enjoy the classic PRW look and functionality. ■

SPECS: Steel, powder-coat finish. Available in Gloss Black, and Matte Black. Rings sold in pairs. Height measured from base to center of ring. Low - .730" (18.5mm); Medium - .850" (21.5mm); High - .980" (24.8mm).

STOCK #	SIZE	HEIGHT	FINISH	PRICE
#100-028-663	1"	Low	Matte Black	4K00QLD \$ 59.99
#100-028-664	1"	Med.	Gloss Black	4K00LCL \$ 59.99
#100-028-665	1"	Med.	Matte Black	4K00FZF \$ 59.99
#100-028-666	1"	High	Matte Black	4K00BDJ \$ 59.99
#100-028-667	30mm	Low	Matte Black	4K00QPH \$ 69.99
#100-028-668	30mm	Med.	Matte Black	4K00HCL \$ 69.99
#100-028-669	30mm	High	Matte Black	4K00NAB \$ 69.99
#100-028-670	34mm	Med.	Matte Black	4K00QCL \$ 59.99

**LEUPOLD "STD" RINGS**

Classic all-steel rings grip the scope tightly. Fits Leupold STD, one- and two-piece bases, plus bases from Burris, Millett and Redfield. Models for 1" and 30mm O.D. scope tubes. **Extension Ring Sets** contain one standard ring, and one front extension ring that offsets ring spacing. 650" (16.5mm). ■

SPECS: Gloss - polished blue. Matte - matte blue. Silver - satin nickel. Height measurements listed in the table below are from top of base to center of ring.



STOCK #	HEIGHT	SIZE	FINISH	STYLE
#526-261-590	Low .650"	1"	Gloss	Standard
#526-261-600	Medium .770"	1"	Gloss	Standard
#526-261-610	High .900"	1"	Gloss	Standard
#526-463-970	Super High 1.000"	1"	Gloss	Standard
#526-408-270	Super Low .550"	1"	Matte	Standard
#526-404-790	Low .650"	1"	Matte	Standard
#526-404-800	Medium .770"	1"	Matte	Standard
#526-461-340	High .900"	1"	Matte	Standard
#526-463-980	Super High 1.000"	1"	Matte	Standard
#526-452-690	Low .650"	1"	Silver	Standard
#526-453-380	Medium .770"	1"	Silver	Standard
#526-470-680	High .900"	1"	Silver	Standard
#526-499-080	Low .650"	1"	Gloss	Extension
#526-499-100	Low .650"	1"	Matte	Extension
#526-294-250	Medium .770"	1"	Gloss	Extension
#526-499-110	Medium .770"	1"	Matte	Extension
#526-478-820	High .900"	1"	Gloss	Extension
#526-478-830	High .900"	1"	Matte	Extension
#526-517-180	Low .650"	30mm	Matte	Standard
#526-499-600	Medium .770"	30mm	Gloss	Standard
#526-455-840	Medium .770"	30mm	Matte	Standard
#526-510-340	Medium .770"	30mm	Matte	Standard
#526-524-940	Medium .770"	30mm	Silver	Standard
#526-470-050	High .900"	30mm	Gloss	Standard

**LEUPOLD QRW2 RING & BASE SYSTEM**



All-Steel, Weaver-Style Components With Quick Release Levers; Start Fresh Or Retrofit To Existing Bases

The latest generation of QRW rings gives you the strength of cross-slot mounting combined with Leupold quality, plus the added convenience of quick release levers. With the rings split at an angle, below the centerline, it's easy to tighten the Torx head cap screws evenly without causing the scope to "roll" in the rings. Spring-loaded, adjustable levers can be moved so both rest at the same angle after tightening. QRW2 rings are an upgrade on this tried-and-true design, with an easy-installation ring-top, an improved keeper, and a bigger contact area with the base for a precision fit. They maintain the classic QRW ruggedness and appearance. Matching **QRW 2-Piece Bases** sold separately, below. ■

SPECS: Steel, powder-coated finish. Available in Gloss Black, Matte Black, and Silver. Rings and bases sold in pairs. Ring heights measured from top of base to center of ring: 1" Low - .750" (19.1mm); 1" Medium - .880" (22.4mm); 1" High - 1.000" (25.4mm); 30mm Low - .840" (21.3mm); 30mm Medium - .970"; (24.6mm); 30mm High - 1.090" (27.7mm).

STOCK #	SIZE	HEIGHT	FINISH	STYLE	PRICE
#100-028-648	1"	Low	Gloss Black	1"	4K00LRH \$ 82.99
#100-028-649	1"	Low	Matte Black	1"	4K67E44 \$ 70.99
#100-028-650	1"	Low	Silver	1"	9Z00PEP \$ 82.99
#100-028-651	1"	Med.	Gloss Black	1"	4K00CJA \$ 82.99
#100-028-652	1"	Med.	Matte Black	1"	4K67J44 \$ 70.99
#100-028-653	1"	Med.	Silver	1"	9Z00KJA \$ 82.99
#100-028-654	1"	High	Gloss Black	1"	9Z00DIL \$ 82.99
#100-028-655	1"	High	Matte Black	1"	4K67E44 \$ 70.99
#100-028-656	1"	High	Silver	1"	9Z00IBC \$ 82.99
#100-028-657	30mm	Low	Gloss Black	30mm	4K00AYE \$ 89.99
#100-028-658	30mm	Low	Matte Black	30mm	4K00FPN \$ 89.99
#100-028-659	30mm	Med.	Gloss Black	30mm	4K00LHD \$ 89.99
#100-028-660	30mm	Med.	Matte Black	30mm	4K00ALM \$ 89.99
#100-028-661	30mm	High	Gloss Black	30mm	4K00KTK \$ 89.99
#100-028-662	30mm	High	Matte Black	30mm	4K00EDI \$ 89.99

STOCK #	FITS	FINISH
#100-028-646	Browning AB3	Matte Black
#749-004-796	Rem 700/40X	Gloss Black
#526-498-410	Rem 700/721/722/725, 40X, SA & LA, RH & LH	Matte Black
#749-004-794	Savage 110-116	Gloss Black
#100-028-647	Tikka T3/T3x	Matte Black
#526-498-380	Win 70, SA & LA (does not fit Express model)	Matte Black
#526-498-360	Win 70 Express, Pre-'64 w/.435" rear hole	Matte Black
#526-498-350	Win 70 Express, Post-'64 w/.330" rear hole	Matte Black
#100-028-645	Winchester XPR	Matte Black
— Advise # —	QRW Bases, 4K34D19	\$ 37.99

STOCK #	HEIGHT	SIZE	FINISH	STYLE
#526-499-590	High .900"	30mm	Matte	Standard
#526-510-350	High .900"	30mm	Matte	Extension
#526-524-950	High .900"	30mm	Silver	Standard
#526-524-001	Super High 1.000"	30mm	Matte	Standard
— Advise # —	1" Gloss & Matte Rings, 4K00NXD			\$ 30.99
— Advise # —	1" Silver Rings, 9Z00FDQ			39.99
— Advise # —	1" Extension Rings, 4K00DAJ			37.99
— Advise # —	30mm Rings, 4K00CPR			45.99
— Advise # —	30mm Extension Rings, 4K00LLB			62.99

**GUARANTEED. FOREVER.®**  
**SINCE 1939**

## LEUPOLD QUICK-RELEASE™ MOUNT SYSTEM

Remove Scope In Seconds; Positive Return To Zero

Remove the scope with just a twist of the levers and reinstall it in only seconds with no loss of zero. Double-lever, dual locking cam system withstands the recoil from any rifle cartridge without shooting loose or accidentally unlocking. **SPECS:** Steel. Polished blue (PB) or matte blue (MB) finish. 1-piece bases fit right-hand actions only. 2-piece bases sold per pair to fit RH, and LH actions. Rings, sold in pairs, 1" (2.5cm) or 30mm (1.18") dia. Ring heights measured from top of base to center of ring. **Low:** .650" (16.5mm). **Medium:** .770" (19.5mm). **High:** .900" (22.8mm). **Super High:** 1.0" (2.5cm). Extension Rings include one standard ring and one that is extended 1/8" to allow mounting a wide variety of scopes.

### QUICK-RELEASE TWO-PIECE BASES - BLUE

STK# PB	STK# MB	FITS
#526-471-840	#526-471-850	BSA Monarch, Rem. 40X, 700,721, 722, 725, S&W 1500, Weatherby Mk V, Vanguard
#526-500-550	#526-500-560	Mark X (Mauser)
#526-500-650	NA	Gunmaker's Bases, bottom not contoured
NA	#526-471-890	Win. 70
NA	#526-500-620	Win. 70 Express, Pre '64 w/.435" rear hole spacing
NA	#526-500-630	Win. 70 Express, Post '64 w/.330" rear hole spacing
NA	#100-028-644	Winchester XPR

— Advise # — Q-R 2-Pc Bases, PB or MB, 9200DAL . . . \$ 62.99

### QUICK-RELEASE ONE-PIECE BASES - BLUE

STK# MB	FITS
#526-000-055	Martin 336/1895
#526-512-470	Rem. 7, 700
#526-000-005	Thompson Center Encore

— Advise # — Q-R 1-Piece Base, 4K00QVJ . . . . . \$ 62.99

### QUICK-RELEASE RINGS - MATTE BLUE

STOCK #	DIA./HEIGHT
#526-471-796	1"/Low
#526-471-810	1"/Medium
#526-499-760	1"/Medium Extended
#526-471-816	1"/High
#526-517-150	1"/Super High
#526-499-310	30mm/Medium
#526-499-330	30mm/High
#526-517-160	30mm/Super High

— Advise # — 1" Q-R Rings, 4K00GYR . . . . . \$ 29.99

— Advise # — 30mm Q-R Rings, 4K00DBL . . . . . 44.99

#526-499-760 1" Med. Q-R Ext Rings, 9200FSH . . . . . \$ 60.99



## LEUPOLD RIMFIRE RINGS

No-Drill, No-Tap Design For 3/8" & 13mm Dovetails

All-steel rings mount 1" scopes on rimfire rifles and handguns with integral 3/8" or 13mm receiver dovetails. Torx® screw mounting system guarantees these rings stay put! **SPECS:** Steel, high-polish blue. Torx head wrench included. Height measured from top of base to center of ring.

STOCK #	FITS DOVETAIL	HEIGHT
#526-000-049	3/8"	Med. - .875" (22.2mm)
#526-000-050	3/8"	High - 1" (25.4mm)

— Advise # — 1" Rimfire Scope Rings, 4K00FKD . . . . . \$ 59.99

## LEUPOLD DUAL DOVETAIL SCOPE MOUNTS & RINGS

Absolutely The Strongest Ring & Base System Available

Leupold's famous rotary dovetail rings in BOTH front AND rear bases; there's no way a ring can shoot off its base. Ideal for large caliber, heavy kicking rifles that can throw a scope off easily, plus light caliber varmint rifles that need an absolutely rigid scope mount to make full use of the gun's accuracy potential. Dual Dovetail Bases and Rings must be used together; will not interchange with other Leupold rings and bases. Rings and bases sold separately; select the correct base set for your rifle, then choose rings. **SPECS:** Steel. Finish: Standard Std. and PB, polished, blue; Matte, matte, blue; Silver, matte.

**DUAL DOVETAIL RIFLE BASE SETS** - Those marked "Rev. Frt." have reversible front base to help get correct ring spacing **SPECS:** Steel. Finish: Standard Std. and PB, polished, blue; Matte, matte, blue; Silver, matte.

STOCK #	MODEL/FINISH	FITS
#526-405-080	700 PB	Rem. 700 Short & Long
#526-463-100	700 Matte	721/722/725/40X; Ruger 77
#526-000-088	700 Silver	(round receiver only);
#526-463-140	700 Rev. Frt/Matte	BSA Monarch; S&W 1500
#526-405-050	70 PB	Win. 70 Short & Long
#526-463-170	70 Matte	Win 70 Short & Long
#526-000-057	70 Rev. Frt/Matte	Win 70 Short & Long
#526-000-058	70 Rev. Frt/Matte	Win 70 Express w/.330" rear hole spacing
#526-501-590	A-Bolt Rev. Frt/Matte	Browning A-Bolt
#526-000-105	X-Bolt/Matte	Browning X-Bolt
#526-000-106	X-Bolt/PB	Browning X-Bolt
#526-517-050	Mark V Std.	Wthby Mark V
#526-517-060	Mark V Matte	Wthby Mark V
#526-517-070	Mark V Rev. Frt/Matte	Wthby Mark V
#526-000-059	Encore/Matte/One-piece	Thompson Center Encore
#526-000-060	Encore/Silver/One-piece	Thompson Center Encore
#100-028-642	Winchester XPR RVR/Matte	

— Advise # — Dual Dovetail Rifle Base, 4K00NDH . . . . . \$ 29.99

**DUAL DOVETAIL MOUNT RINGS** - Heights from Low for small scopes to Super High for giant objective bells. Sold in Pairs. **SPECS:** Steel. Finish: PB, polished, blue; Matte, matte, blue; Silver, matte. Height is from top of base to center of rings.

STOCK #	DIAMETER/DESCRIPTION/FINISH	HEIGHT
#526-408-250	1"/Low/PB	.650"
#526-462-220	1"/Low/Matte	.650"
#526-523-130	1"/Low/Silver	.650"
#526-444-240	1"/Medium/PB	.770"
#526-462-250	1"/Medium/Matte	.770"
#526-523-230	1"/Medium/Silver	.770"
#526-470-540	1"/High/PB	.900"
#526-470-570	1"/High/Matte	.900"
#526-000-061	1"/High/Matte/Ext.	.900"
#526-470-640	1"/Super High/Matte	1"
#526-522-420	30mm/Low/Matte	.650"
#526-499-570	30mm/Medium/Matte	.770"
#526-499-580	30mm/High/Matte	.900"
#526-000-062	30mm/High/Matte/Ext.	.900"
#526-522-340	30mm/Super High/Matte	1"
#100-028-643	34mm/Medium/Matte	.770"

— Advise # — 1" Dual Dovetail Rings, 4K00HVF . . . . . \$ 30.99

— Advise # — 1" Extension Rings, High, 9200NDS . . . . . 40.99

— Advise # — 30mm Dual Dovetail Rings, 4K47149 . . . . . 49.99

— Advise # — 30mm Extension Rings, High, 9200DUJ . . . . . 54.99

## RUGER® FACTORY SCOPE RINGS

For Precise, Solid Scope Mounting On Ruger Rifles & Handguns



High-quality Ruger factory rings install easily and provide solid, zero-movement scope attachment to Ruger rifles and handguns with integral bases. No. 1 rifles with factory base, and No. 3 rifles with special factory bases available below. Low, Medium, High, and Extra-High heights in blue carbon steel, natural stainless steel, or stainless with Ruger's proprietary matte Target Grey® finish.

**RINGS FOR: No. 1, No. 3, Mark II Pistol, 77/22®, 77/22® Mag., Mini-14® Ranch Rifle, Mini-Thirty®, Redhawk®**

Available as single rings only. Order TWO (2) of the SAME ring for these firearm models. **SPECS:** Carbon steel, polished blue finish (BL), stainless steel, natural (SS), or Target Grey® (TG) finish. Ring heights measured from top of base to bottom of scope tube. **Low** - .325". **Medium (Med.)** - .435". **High** - .565". **Extra-High (X-High)** - .680".

STOCK #	RUGER PART #	FINISH	HEIGHT
<b>1" RINGS</b>			
#834-000-002	3B	BL	Low
#834-000-005	3K	SS	Low
#780-001-250	3KTG	TG	Low
#834-000-003	4B	BL	Med.
#834-000-006	4K	SS	Med.
#834-003-001	4KHM	Matte SS	Med.
#780-001-248	4KTG	TG	Med.
#834-000-004	5B	BL	High
#834-000-007	5K	SS	High
#780-001-249	5KTG	TG	High
#834-003-002	6B	BL	X-High
#834-000-008	6K	SS	X-High
#780-001-251	6KTG	TG	X-High
<b>30MM RINGS</b>			
#834-008-001	4B30	BL	Med.
#780-001-253	4K30	SS	Med.
#834-008-002	5B30	BL	High
#834-008-007	6B30	BL	X-High

— Advise # — Ruger Scope Ring, each, 8G31I34 . . . . . \$ 32.99

— Advise # — Ruger Scope Ring, each, 8G33Q99 . . . . . 39.99

#780-004-125 SC-24VA-A Scope Bases For No. 1V Rifle, Blued, 8G33K24 . . . . . \$ 34.99

## RINGS FOR: M77®, M77 MARK II & SUPER REDHAWK®

These models require front and rear scope rings of different heights. On M77/M77 Mark II, the shorter ring always mounts at the front of the receiver and the higher ring at the rear. On the Super Redhawk, the higher ring is always at the front of the frame and the lower ring at the rear. **SPECS:** Steel. Finish: PB, polished, blue; Matte, matte, blue; Silver, matte. Height is from top of base to center of rings.

Available as single rings only. Order one (1) FRONT and one (1) REAR ring from table below.

STK# FRONT	STK# REAR	FINISH	HEIGHT
<b>1" RINGS</b>			
#834-000-002 3B	NA	—	BL Low
#834-000-005 3K	NA	—	SS Low
#780-001-250 3KTG	NA	—	TG Low
#834-000-003 4B	#834-000-003 4B	BL	Med.
#834-000-006 4K	#834-000-006 4K	SS	Med.
#780-001-248 4KTG	#780-001-248 4KTG	TG	Med.
#834-000-004 5B	#834-000-004 5B	BL	High
#834-000-007 5K	#834-000-007 5K	SS	High
#780-001-249 5KTG	#780-001-249 5KTG	TG	High
NA	#834-003-002 6B	BL	X-High
NA	#834-000-008 6K	SS	X-High
NA	#780-001-251 6KTG	TG	X-High

## S&K

## NO-DRILL, NO-TAP SCOPE MOUNT

Easily Add A Scope To Bolt & Semi-Auto, Military & Sporters



Direct, bolt-on installation; no drilling and tapping required. Replace the original, open sights with the S&K Mount; install your favorite scope with a set of Weaver-style rings and go shooting. This is the easiest, quickest way we've seen to get smaller groups from these guns without making modifications that could hurt the resale or collector value. Precision-machined and finished in a matte black that doesn't reflect light. Blends in well with the original military finishes. The only way to go when scoping those extra-hard, stainless Mini-14s. Models with No rings feature a Weaver-style base; supplied without rings. **SPECS:** Base - Aluminum, black, matte, anodized or powder coated. Sizes vary. S&K 1" Rings - Steel, black, matte finish. Height: .140" (3.6mm) top of base to bottom of ring. Fits - No. 1 Mk III Lee Enfield, also includes instructions to fit Ishapore, .308 cal. rifles. Mini-14 will not fit Ranch or Mini-30. Mosin Nagant M44 and Schmidt-Rubin K31 replace rear sight, use long eye relief pistol or scout scopes, or dot sights.

STOCK #	FITS	RINGS	PRICE
#794-001-014	Mini-14 181 Series	No	4G56I94 \$ 66.99
#794-001-114	M1A/M14	No	4G58Q49 \$ 64.99
#794-001-130	M1 Carbine	No	4G52H19 \$ 57.99
#794-001-100	M1 Garand	No	4G73J94 \$ 86.99
#794-001-111	No. 1 Mk III Lee Enf.	No	4G62J89 \$ 73.99
#794-001-045	4 and 5 Lee Enfield	No	4G61P19 \$ 71.99
#794-001-017	1917 Enfield	No	4G56P94 \$ 66.99

**03A3 MOUNT** - No need to drill and tap a rock-hard Springfield with this No-Drill, No-Tap Mount. No need to bend the bolt, a simple grinding of the bolt handle for clearance is all that's needed. Blends in well with original finish. **SPECS:** Alum., black, anodized. Uses standard Weaver-style 1" (2.5cm) rings, not supplied. Wt. 3 oz. (85 g). 5/16" (13.5cm) long.

#794-001-033 S&K 03A3 Springfield Mount, 4G62I89 . . . \$ 73.99

**U.S. KRAG MOUNT** - Easily installed with no drilling or tapping required. High tensile strength alloy base furnished with streamlined, S&K horizontally split rings. **SPECS:** Aluminum base, anodized black, matte. Steel rings, blue matte finish. Steel clamp screws.

#794-001-098 S&K Krag Base, 4G84P14 . . . . . \$ 98.99

**MOSIN NAGANT MOUNT** - No drilling, tapping or bolt modifications. Aluminum base replaces the rear sight, and accepts a long eye relief, scout or handgun scope. Includes S&K, horizontally split steel rings. **SPECS:** Mount - Aluminum, anodized, black, matte finish. 1" Rings - Steel, blue, matte finish. M91 fits M91/30 and M91/59. M44 fits M44 Carbine.

#794-000-004 M91 Mosin Nagant Mnt, 4G61I19 . . . . . \$ 71.99

#794-000-005 M44 Mosin Nagant Mnt, 4G61P19 . . . . . 71.99

STK# FRONT	STK# REAR	FINISH	HEIGHT
<b>30mm RINGS</b>			
#834-008-001 4B30	NA	—	BL Med.
NA	#834-008-002 5B30	BL	High

— Advise # — Ruger Scope Ring, each, 8G31I34 . . . . . \$ 32.99

— Advise # — Ruger Scope Ring, each, 8G33Q99 . . . . . 39.99

STK# FRONT	STK# REAR	FINISH	HEIGHT
<b>30mm RINGS</b>			
#834-008-001 4B30	NA	—	BL Med.
NA	#834-008-002 5B30	BL	High

— Advise # — Ruger Scope Ring, each, 8G31I34 . . . . . \$ 32.99

— Advise # — Ruger Scope Ring, each, 8G33Q99 . . . . . 39.99

**RUGER 10/22® SCOPE BASE ADAPTER** - Mounts to the top of the 10/22 receiver and allows the 10/22 to accept any ring designed for .22 rifles with dovetailed receivers. **SPECS:** Steel, blue, matte finish. M91 fits M91/30 and M91/59. M44 fits M44 Carbine.

#780-004-222 10/22 Scope Base Adapter, 8G9H34 . . . \$ 10.99

Orders: 800-741-0015

order on the web  
**brownells.com**

**BROWNELLS** PAGE 273





## TACTICAL PRECISION TSR™ & TSR "W" RINGS



### Super Holding Power, Precision Alignment

Rugged tactical rings are precision machined to tolerances of .0002" for maximum scope/ring contact to hold scope securely against recoil. Four-screw cap lets you align the reticle, tighten the left side of the cap, then the right side without the scope rotating. Large clamp-nut lets you torque ring to base. Radiused edges and corners help prevent snagging while providing attractive appearance. **TSR** - 7075-T6 Aluminum, fits MIL-STD 1913 Picatinny base. **TSR "W" Series** - 1215 alloy steel, fits Weaver bases. **34mm** - Accepts Schmidt & Bender-type 34mm scope tubes. **Heights** in tables below are measured from top of base to center of ring. **SPECS:** 1/2" (15.8mm) wide. **TSR** - 7075-T6 Aluminum black, hard anodized to MIL-A-8625 standards. **TSR "W" Series** - 1215 alloy steel, Mil-C-13924 oxide finish, matte black.

### TSR ALUMINUM RINGS

STOCK #	HEIGHT	SIZE	PRICE
#100-000-951	Low - .785"	1"	9K67H10 \$ <b>86.33</b>
#100-000-952	Med - .985"	1"	9K67A10 \$ <b>86.33</b>
#100-000-953	High - 1.185"	1"	9K70E11 \$ <b>90.21</b>
#100-000-957	Low - .925"	30mm	9K71H60 \$ <b>92.15</b>
#100-000-958	Med - 1.075"	30mm	9K71G60 \$ <b>92.15</b>
#100-000-959	High - 1.225"	30mm	9K74L59 \$ <b>96.03</b>

### TSR "W" SERIES STEEL RINGS

STOCK #	HEIGHT	SIZE	PRICE
#100-001-403	Low - .785"	1"	9K87L29 \$ <b>96.03</b>
#100-001-404	Med - .985"	1"	9K87B29 \$ <b>96.03</b>
#100-001-405	High - 1.185"	1"	9K83Q11 \$ <b>99.99</b>
#100-001-409	Low - .925"	30mm	9K95L39 \$ <b>105.73</b>
#100-001-410	Med - 1.075"	30mm	9K95A39 \$ <b>105.73</b>
#100-001-411	High - 1.225"	30mm	9K98E99 \$ <b>109.61</b>
#100-003-300	Med - 1.185"	34mm	9K130A49 \$ <b>144.53</b>

## TACTICAL PRECISION HRT™ RINGS

### Superior Scope-To-Ring Contact With A Slim-Line Look



Precision, CNC-machined, tactical rings offer superior holding power in a smooth, contoured design for light weight and minimum bulk. Made from 7075 aluminum billet or extra strong, 1215 steel alloy. Guaranteed, .0002" cylindrical roundness between ring base and top strap ensures excellent tube-to-ring contact; prevents scope tube "pinch" and eliminates the need to lap prior to scope mounting. Steel alloy, cross-bolt and hex nut gives positive locking on Picatinny and Weaver style bases. Four, Torx® head screws prevent scope shift under the heaviest recoil. **Sold in pairs.** **SPECS:** 1215 steel alloy or 7075-T651 aluminum, matte black. Height measured from top of base to center of ring. **1"** - Medium: .985" (25mm). **High:** 1.185" (30mm). **30mm** - Medium: 1.075" (27.3mm). **High:** 1.225" (31.1mm). Fits Picatinny and Weaver-style mounts.

STOCK #	HGT	MATERIAL	SIZE	PRICE
#100-001-474	Medium	Steel	1"	9K79G79 \$ <b>96.99</b>
#100-001-475	High	Steel	1"	9K83P11 \$ <b>99.99</b>
#100-001-476	Medium	Alum	1"	9K73D94 \$ <b>86.33</b>
#100-001-477	High	Alum	1"	9K65N44 \$ <b>90.99</b>
#100-001-478	Medium	Steel	30mm	9K87L76 \$ <b>105.99</b>
#100-001-479	High	Steel	30mm	9K98G99 \$ <b>109.61</b>
#100-001-480	Medium	Alum	30mm	9K77E11 \$ <b>92.99</b>
#100-001-481	High	Alum	30mm	9K82Q44 \$ <b>96.03</b>

## TALLEY THOMPSON CENTER ENCORE RINGS & BASE



### Lightweight, Durable & Practical

One-piece ring and base eliminates the joint between the ring and base to provide a rigid mounting platform that reduces ring alignment problems and prevents kinking a scope. Surprisingly lightweight yet durable, machined from high-grade aluminum, these rings won't add a lot of extra weight that can bog you down at the range or in the field. Accepts 1" diameter scope tubes. **SPECS:** Extruded, CNC machined 7000 series aluminum, black. Fits scopes with 1" diameter tubes. **Low** fits scopes up to 44 mm objective with standard barrel contour. **Medium** fits scopes up to 50 mm objective with standard barrel contour. **High** fits scopes with a 56 mm objective with standard barrel contour. Four mounting screws and Allen wrench included. **#874-000-089 TC Encore Rings & Base, Low, 4G53K99. . \$ 59.99**  
**#874-000-090 TC Encore Rings & Base, Med, 4G49E79. . \$ 51.99**  
**#874-000-091 TC Encore Rings & Base, High, 4G00E71. . \$ 49.99**

## TALLEY

### LIGHTWEIGHT SCOPE MOUNT

#### When Every Ounce Counts; The Strength Of Steel Without The Weight



One-piece construction blends the ring and base into a single unit. Eliminating the ring/base joint not only keeps weight to a minimum, it provides a stronger mount. Each ring cap is 1/8" wide, with four TORX screws to keep large scopes from slipping or shifting. Designed by Mel Forbes of New Ultralight Arms. **SPECS:** 7000 series aluminum, black, anodized, matte finish. Accepts 1" dia. scopes, unless otherwise listed in fits column for 30mm dia. scopes. Height from bottom of ring to top of receiver. **Low** - .400" (10.1mm). **Med** - .500" (12.7mm). **High** - .640" (16.3mm). **X-High** - .740" (18.8mm). Approx. weight 2.1 oz. (59 g). Some heights vary, see chart below. **Rem. 700** also fits 721/722/725 and 40X models. **Rem. Model Seven** fits receivers with four screw holes. **Savage AccuTrigger** fits round top centerfire receivers with AccuTrigger. **Win. 70** fits .860" rear hole spacing only.

STOCK #	FITS	HEIGHT	PRICE
#874-000-027	Browning A Bolt	Low	4G45B59 \$ <b>47.99</b>
#874-000-028	Browning A Bolt	Med	4G45A59 \$ <b>47.99</b>
#874-000-041	Howa	Low	4G45K59 \$ <b>47.99</b>
#874-000-042	Howa	Med	4G45J59 \$ <b>47.99</b>
#874-000-037	98 Mauser Lg Ring	Low	4G45M59 \$ <b>47.99</b>
#874-000-039	Marlin 336/1895 (.500")	Low	4G45L59 \$ <b>47.99</b>
#874-000-040	Marlin 336/1895 (.600")	Med	4G45B59 \$ <b>47.99</b>
#874-000-110	Rem. 700 30mm	Low	4G45E59 \$ <b>47.99</b>
#874-000-111	Rem. 700 30mm	Med	4G45M59 \$ <b>47.99</b>
#874-000-043	Rem. 700 Ext.	Low	4G45Q59 \$ <b>47.99</b>
#874-000-044	Rem. 700 Ext.	Med	4G45F59 \$ <b>47.99</b>
#874-000-047	Rem. Model Seven	Low	4G45J59 \$ <b>47.99</b>
#874-000-048	Rem. Model Seven	Med	4G45G59 \$ <b>47.99</b>
#874-000-049	Ruger® 10/22®	Low	4G45C59 \$ <b>47.99</b>
#874-000-050	Ruger 10/22	Med	4G45B59 \$ <b>47.99</b>
#874-000-093	Sav. AccuTrigger	Low	4G45C59 \$ <b>47.99</b>
#874-000-094	Sav. AccuTrigger	Low Ext.	4G45J59 \$ <b>47.99</b>
#874-000-096	Sav. AccuTrigger	Med Ext.	4G45E59 \$ <b>47.99</b>
#874-000-055	Tikka (.500" high)	Low	4G45G59 \$ <b>47.99</b>
#874-000-056	Tikka (.600" high)	Med	4G45G59 \$ <b>47.99</b>
#874-000-060	Wthby Mark V	Med	4G45Q59 \$ <b>47.99</b>
#874-000-063	Win. 70 .860" Rear	Low	4G45F59 \$ <b>47.99</b>
#874-000-064	Win. 70 .860" Rear	Med	4G45C59 \$ <b>47.99</b>
#874-000-065	Win. 70 .860" Rear F/Ext.	Low	4G45A59 \$ <b>47.99</b>



## TALLEY SCOPE RINGS & BASES

### Fixed Or Quick Detach Models Anchor Solidly To Shouldered Bases; Provides A Clean, Uniform Look

Beautifully machined from solid, steel or stainless steel bar stock to form a rock-solid scope mounting system that looks as good as it functions. Vertically-split ring design with dual screws provides maximum holding power for scopes with 1" or 30mm diameter tubes. Rings lock securely into unique, dovetail bases featuring a double shoulder that completely prevents any movement, and counters the heaviest recoil. Together, they create a clean, contoured appearance on any sporting rifle. **USA**

**QUICK DETACH RINGS** - Include precision machined, QD levers for fast, easy scope installation and removal, plus button-head screws for optional fixed ring application if desired. **SPECS:** Steel, blue, satin finish or stainless steel (SS), natural finish. Models available for 1" or 30mm diameter scope tubes. Ring heights measured from top of base to bottom of ring. **Low** - .300" (7.62mm). **Medium** - .400" (10.16mm). **High** - .500" (12.7mm). **X High** - .600" (15.2mm). Fit Talley bases only. Available in pairs.

STOCK #	FINISH	SIZE	HEIGHT	PRICE
#874-025-101	Blue	1"	Low	4G10Q99 \$ <b>119.99</b>
#874-000-104	SS	1"	Low	4G134M99 \$ <b>159.99</b>
#874-025-102	Blue	1"	Medium	4G10F99 \$ <b>119.99</b>
#874-025-301	Blue	30mm	Low	4G10D99 \$ <b>119.99</b>
#874-025-302	Blue	30mm	Medium	4G10A99 \$ <b>119.99</b>
#874-025-303	Blue	30mm	High	4G10I99 \$ <b>119.99</b>
#874-000-080	Blue	30mm	X High	4G10N99 \$ <b>119.99</b>

**FIXED SCOPE RINGS** - include low-profile, button-head Torx® screws for mounting applications where permanent scope mounting is preferred.

**SPECS:** Steel, blue, satin finish or stainless steel (SS), natural finish. Models available for 1" or 30mm diameter scope tubes. Ring heights measured from top of base to bottom of ring. **Low** - .300" (7.62mm). **Medium** - .400" (10.16mm). **High** - .500" (12.7mm). **X High** - .600" (15.2mm). Fit Talley bases only. Available in pairs.



STOCK #	FINISH	SIZE	HEIGHT	PRICE
#874-000-001	Blue	1"	Low	4G64F99 \$ <b>74.99</b>
#874-000-106	SS	1"	Low	4G99A99 \$ <b>114.99</b>
#874-000-002	Blue	1"	Medium	4G64L99 \$ <b>74.99</b>
#874-000-107	SS	1"	Medium	4G99A99 \$ <b>114.99</b>
#874-000-003	Blue	1"	High	4G64E99 \$ <b>74.99</b>
#874-000-005	Blue	30mm	Low	4G64Q99 \$ <b>74.99</b>
#874-000-006	Blue	30mm	Medium	4G64B99 \$ <b>74.99</b>
#874-000-007	Blue	30mm	High	4G64D99 \$ <b>74.99</b>

**SCOPE RING BASES** - Feature Talley's proven, machined saddle design with double recoil shoulders to completely immobilize the rings under heavy recoil. Bases accept both Fixed and QD Talley rings.

**SPECS:** Steel, blue, satin finish or stainless steel (SS), natural finish. Available in pairs. Accept Talley Fixed or QD rings only.



STOCK #	FINISH	FITS	HOLE SPACING	PRICE
#874-000-017	Blue	Browning A-Bolt (except Titanium model)	-	4G27E89 \$ <b>30.99</b>
#874-026-098	Blue	Mauser 98	-	4G27D89 \$ <b>30.99</b>
#874-026-701	Blue	Rem. 700, 721, 722, 725, 40X/Howa	-	4G28K79 \$ <b>31.99</b>
#874-000-105	SS	Rem. 700, 721, 722, 725, 40X/Howa	-	4G42B29 \$ <b>46.99</b>
#874-000-021	Blue	Rem. 700 Extension front/std rear	-	4G35A69 \$ <b>41.99</b>
#874-000-075	Blue	Sako Long, L61R, L691, M995, IV, V	-	4G42N29 \$ <b>46.99</b>
#874-000-077	Blue	Sako Short, L461, L579, S491, M591, I, II, III	-	4G42C29 \$ <b>46.99</b>
#874-026-010	Blue	Weatherby Mk V 9-lug bolt	-	4G27K89 \$ <b>30.99</b>
#874-026-070	Blue	Win. 70, all except Magnums	.860"	4G27F89 \$ <b>30.99</b>
#874-026-071	Blue	Win. 70, Pre '64 .300 & .375 Mag.	.435"	4G28J79 \$ <b>31.99</b>
#874-026-072	Blue	Win. 70, Post '64 .300 & .375 Mag.	.330"	4G27E89 \$ <b>30.99</b>

## TALLEY RIMFIRE SCOPE RINGS

### Provide Precise Fit To Receiver

Machined from steel bar stock to provide a strong mounting system with a smooth profile. Precision cut dovetails have the correct angle for an exact fit. Torx® clamp screws snug down tightly for maximum holding power. **USA**



**SPECS:** Steel, blue, satin finish. Accept 1" scopes. Height from top of base to bottom of ring: **Low** - .313" (8mm). **High** - .600" (15.2mm). **Sold in pairs.**

STOCK #	FITS	PRICE
#874-000-008	Anschutz rings, Low	4G48G99 \$ <b>52.99</b>
#874-000-084	Anschutz rings, High	4G48B99 \$ <b>52.99</b>
#874-000-009	CZ .22 Rimfire rings, Low	4G48L99 \$ <b>52.99</b>
#874-000-109	CZ .22 Rimfire rings, High	4G48B99 \$ <b>52.99</b>
#874-000-010	CZ .22 Hornet rings, Low	4G72K99 \$ <b>79.99</b>

GUARANTEED. FOREVER.®  
SINCE 1939



## VORTEX MATCHED RINGS

Manufactured In Pairs For Precision Fit

Machined to .0005" tolerances from 7075 T6 billet aluminum, these scope rings are kept in numbered pairs throughout the manufacturing process for precise fitting and alignment with your scope tube. Perfect for large-diameter, light-gathering scope tubes being used for tactical, and long-range applications. Vibratory tumbling, followed by a hand bead-blasting process ensures that these rings won't snag on clothing or other gear. Type III hard coat anodizing eliminates reflections, and enhances surface abrasion resistance. Grade 8 fasteners lock the rings and scope securely to your weapon with the supplied Torx wrench. Select models fit Weaver mounts. **SPECS:** 7075 T6 billet aluminum, Type III hard coat anodized, matte black. Available for 35mm, 34mm, and 30mm scopes. Height measured from base to center of scope.



STOCK #	SIZE	HEIGHT	PRICE
#100-006-719	35mm	Med .95"	3B00CSR \$ 149.99
#100-013-129	35mm	Med.-Plus 1"	3B00QYF \$ 149.99
#100-006-720	35mm	High 1.26"	3B00MUG \$ 149.99
#100-013-132	34mm	Med. .92"	3B00NUN \$ 149.99
#100-013-131	34mm	Med.-Plus 1"	3B00MRG \$ 149.99
#100-017-325	34mm	Med.-High 1.1"	3B00KEA \$ 149.99
#100-013-130	34mm	High 1.26"	3B00NHS \$ 149.99
#100-017-324	34mm	Extra-High 1.45"	3B00ACE \$ 149.99
#100-013-135	30mm	Low .87"	3B00BHS \$ 149.99
#100-013-134	30mm	Med. .97"	3B00LXL \$ 149.99
#100-013-133	30mm	High 1.26"	3B00HXF \$ 149.99
#100-019-180	30mm	Extra-High 1.45"	3B00GCG \$ 149.99
#100-019-181	30mm	Med. .97"	3B00BDH \$ 149.99
#100-019-182	1"	Low .76"	3B00GMM \$ 149.99

## VORTEX TACTICAL 30MM SCOPE RINGS



These wide, 6-screw tactical rifle scope rings securely mount your scope to any Picatinny or Weaver type rails. Rings offer solid support for scopes with 30mm tubes. Sold one ring per package.

#100-013-148	30mm Tactical Ring, Low, 3B00BHJ	\$ 24.99
#100-013-149	30mm Tactical Ring, Med, 3B00AOG	\$ 24.99
#100-013-150	30mm Tactical Ring, High, 3B00BEQ	\$ 24.99
#100-013-151	30mm Tactical Ring w/ Co-Witness, Extra-High Absolute, 3B00PLK	\$ 24.99
#100-013-152	30mm Tactical Ring w/ 1/3 Co-Witness, Extra-High Lower, 3B00EHM	\$ 24.99

## VORTEX HUNTER SCOPE RINGS

Constructed of aircraft grade 6061-T6 aluminum, these rings solidly attach to Picatinny or Weaver-style bases. The standard, 2-screw hunter rings are ideal for general hunting setups. Anodized finish helps resist scratches and corrosion.



#100-013-142	30mm Hunter Rings, Low, 3B00MTK	\$ 24.99
#100-013-143	30mm Hunter Rings, Med, 3B00MEK	\$ 24.99
#100-013-144	30mm Hunter Rings, High, 3B00FLS	\$ 24.99
#100-013-145	1" Hunter Rings, Low, 3B00PGC	\$ 24.99
#100-013-146	1" Hunter Rings, Med, 3B00HKF	\$ 24.99
#100-013-147	1" Hunter Rings, High, 3B00FQQ	\$ 24.99

## WARNE 7.3/.22 RINGS

Smooth Profile, Horizontal Split; Fit A Wide Variety Of Rimfire Rifles



Rugged, all-steel rings for scopes with 1" O.D. tubes fit rifles with 3/8" or 11mm dovetail grooves. Reversible clamp flips to give you .010" nominal adjustment to ensure tight clamping. Ring straps secured with two screws each. **SPECS:** Steel, powder coated, matte black. Height measured from top of base to inside, bottom of ring. **Medium** - .406" (10.3mm) nominal height. **High** - .525" (13.3mm) nominal height.

STOCK #	DIA./HEIGHT	FINISH	PRICE
#947-000-096	1"/Med. Grooved	Matte	7D28Q79 \$ 31.59
#947-000-098	1"/High Grooved	Matte	7D28K79 \$ 31.59

## WARNE MAXIMA 2-PIECE BASE SETS

Weaver-Style Bases in Steel - So Relax, That Scope Isn't Going Anywhere!

Smooth, solid steel two-piece bases provide an extra strong mount system. Accept Warne Maxima rings or any Weaver-style ring. Three finishes. **SPECS:** 12L14 steel. Available in polished blue, matte blue, or silver. Two-piece only, Includes mounting screws. Do not mix Maxima bases with other brands of Weaver-style base, the heights are often different. **RHS** = Rear Hole Spacing.



STOCK #	FITS	FINISH	PRICE
#947-000-160	Browning BAR, BAR II, Mark II, BLR Lightning, BPR, T-Bolt; Colt Coltsman, 264 & 30-06 Round Top (Enfield/Rem 30 style); Marlin Camp 9 & 45; Rem 30 & 720; Sav 40 & 45; Win SXR	MATTE	7D22G94 \$ 26.39
#947-000-162	Browning BLR (steel receiver); Colt 223, 243 & 308 Round Top; Sauer SHR Pro Hunter	MATTE	7D22I03 \$ 26.39
#947-000-406	CVA-V2 Round Barrel Ext Rear	MATTE	7D22H03 \$ 26.39
#947-000-168	Marlin 9, 45, 30AS, 36, 62, 93, 336, 336C, 375, 1893, 1894 Cowboy, 1895, 444; Glenfield 30, Zane Grey, 989, 22 Auto (500" hole spacing)	MATTE	7D22L94 \$ 26.39
#947-000-170	Mauser 98 altered; Mauser FN (military model); Charles Daly; CIL 972; Colt 57; H&R (pre 1973) 300, 301, 330, 370; Interarms Mark X & Viscount; Marlin 455; Musgrave MK III & IV; Parker Hale 1000, 1000C, 1100, 1200, 1700; Rem 798; Voere 2150, 2165-1, 2165-2, 2165-3, 2165-4	MATTE	7D22G94 \$ 26.39
#947-000-172	Mauser 98 unaltered	MATTE	7D22J94 \$ 26.39
#947-000-176	Mauser Small Ring 96 unaltered	MATTE	7D22L94 \$ 26.39
#947-000-177	Rem 700, 78, 721, 722, 725, 700 Muzzle Loader; BSA Monarch; Churchill Highlander; Herters U-9 Round Top; Howa 1500 & 1700; Mossberg 1500 & 1700; Raptor Arms long action; S&W 1500, 1600, 1700; Weatherby Vanguard	POLISHED	7D22J94 \$ 26.39
#947-000-178	Rem 700, 78, 721, 722, 725, 700 Muzzle Loader; BSA Monarch; Churchill Highlander; Herters U-9 Round Top; Howa 1500 & 1700; Mossberg 1500 & 1700; Raptor Arms long action; S&W 1500, 1600, 1700; Weatherby Vanguard	MATTE	7D22B94 \$ 26.39
#947-000-151	Charles Daly Mini Mauser; Interarms Mk X Mini Mauser, Rem 799	MATTE	7D22E03 \$ 26.39
#947-000-193	Savage Accu-Trigger; Carl Gustav 2000; Navy Arms Country Boy Muzzle Loader; All Center Fire; Shilen Round Receiver; Stevens 200; Win 88 & 100	MATTE	7D22P94 \$ 26.39
#947-000-197	Steyr Mannlicher M & MS	MATTE	7D22B03 \$ 26.39
#947-000-201	Weatherby Mark V Magnum	MATTE	7D22A94 \$ 26.39
#947-000-203	Win 670, 770, Win 70 Std. Pre & Post 64 with .860 RHS, WSM; Enfield Win 70-style; Kimber M89 BGR; Montana	MATTE	7D22J94 \$ 26.39
#947-000-154	Anschutz (All); Marlin A1, 50	MATTE	7D22A94 \$ 26.39
#947-000-156	Browning A-Bolt .22, Micro-Medallion; Steyr SBS	MATTE	7D22N03 \$ 26.39
#947-000-244	Kimber 84	MATTE	7D22Q94 \$ 26.39
#947-000-245	Kimber 8400	MATTE	7D22E94 \$ 26.39
#947-000-166	Knight Disc/Revolution; Mossberg 680, 695, 800, 50, 51, 151, 350, 351, 352; Rem 541-T, 541-S; Western Field 775, 780	MATTE	7D22I94 \$ 26.39
#947-000-174	Mauser Small Ring 96 altered; High Standard High Power; Herters J-9; Husqvarna HVA Small Ring; HVA 1600 & 1900; Mauser Small Ring G33-40; Sears 511	MATTE	7D22C94 \$ 26.39
#947-000-180	Rem New Mdl Seven, 600, 660, 670, 673, XP-100	MATTE	7D22N94 \$ 26.39
#947-000-182	Benelli Black Eagle, Super Black Eagle Shotgun; Rem 7400, 7600, 76, 74, FOUR, SIX, New 750	MATTE	7D22A03 \$ 26.39
#947-000-185	Ruger® 10/22® .22LR	MATTE	7D22Q03 \$ 26.39
#947-000-189	Sauer 202	MATTE	7D22N03 \$ 26.39
#947-000-191	Savage pre-2003 bolt action flat receiver	MATTE	7D22B03 \$ 26.39
#947-000-199	Weatherby Mark V Standard & .240WM	MATTE	7D22Q03 \$ 26.39
#947-000-205	Win 70 Post 64 Magnum .330 RHS	MATTE	7D22B94 \$ 26.39
#947-000-207	Win 70 WSSM	MATTE	7D22N03 \$ 26.39

## WARNE MAGNUM SPECIAL APPLICATION MAXIMA RINGS

Rugged Steel, Close-Tolerance Dovetails For Secure Mounting



Vertically split rings, precision-machined from steel barstock, hold large objective, heavy scopes firmly against recoil. Finished to exacting tolerances so the scope returns to zero, even after repeated dismounting and remounting. Permanent mount (**Perm**) uses two socket screws to solidly lock rings to base. Quick detach (**QD**), double lever rings clamp quickly and tightly; dismount instantly when you lift the lever. Levers can be repositioned so both rest at the same angle. Ultra High rings give correct height for flattop AR-15 and H&K SL7 rifle. **SPECS:** Steel, blued, matte finish. Height measured from top of base to bottom of ring saddle. **QD:** 1" (2.5cm); **X-High** - .650" (16.5mm) and **Ultra-High** - .935" (23.7mm); **30mm (1.18")**: **X-High** - .650" and **Ultra-High** - .850" (21.6mm). **Perm:** 1" **X-High** - .650" and 30mm **X-High** - .650". All models fit Warne Maxima, Weaver, and Picatinny bases.

STOCK #	DIA./HEIGHT	TYPE	PRICE
#947-000-003	1"/X-High	Perm	7D55G79 \$ 61.19
#947-000-004	1"/X-High	QD	7D75B64 \$ 88.39
#947-000-005	1"/Ultra High	QD	7D75I64 \$ 88.39
#947-000-008	30mm/X-High	Perm	7D55N79 \$ 61.19
#947-000-009	30mm/X-High	QD	7D88I39 \$ 103.59
#947-000-010	30mm/Ultra High	QD	7D88N39 \$ 103.59

## WARNE MAXIMA TACTICAL RINGS & BASES



Rigid, Steel Construction For Maximum Strength

Picatinny tactical rings and bases, precision-machined from steel for maximum strength and reliability. Rugged, 1" and 30mm **Tactical Rings** feature a robust, stainless steel crosslug that will not swage,peen or deform under heavy recoil. Ensures consistent return-to-zero for optics that are removed and re-attached. Three, Torx-style fasteners secure the vertically split ring halves at the top to prevent scope shift. Large, clamping nut at bottom provides exceptional holding power. One-piece, **Tactical Bases** are made from solid bar stock of cold drawn alloy steel, stress relieved for extra strength and uniformity. Available for standard elevation adjustment or with 20 MOA forward angle for extra long range shooting. **SPECS:** Rings: Steel, matte black, powder coat finish. **Medium** - .375" (9.5mm) high. **High** - .525" (13.3mm) high. **Bases:** 12L14 carbon steel, powder coated, matte black. Choose **Standard (Std)** or **20 MOA** built-in elevation. Savage bases available for models with and without AccuTrigger™. Winchester bases fit current production Model 70.

TACTICAL RINGS			
STOCK #	DIA./HEIGHT	PRICE	
<b>30MM TACTICAL RINGS</b>			
#947-000-112	30mm/Medium	7D95D19	\$ 111.99
#947-000-125	30mm/High	7D95I19	\$ 111.99
TACTICAL BASES			
STOCK #	FITS	TYPE	PRICE
#947-000-391	Browning A-Bolt III SA	20 MOA	7D100P90 \$ 111.99
#947-000-397	Nosler M48 LA	20 MOA	7D93J50 \$ 111.99
#947-000-128	Rem 700 SA	Std	7D81H59 \$ 95.99
#947-000-138	Rem700 SA	20 MOA	7D95C19 \$ 111.99
#947-000-129	Rem 700 LA	Std	7D81E59 \$ 95.99
#947-000-139	Rem 700 LA	20 MOA	7D95B19 \$ 111.99
#947-000-402	Ruger® American Rifle® LA	Std	7D75H59 \$ 95.99
#947-000-401	Ruger® American Rifle® LA	20 MOA	7D88C59 \$ 111.99
#947-000-390	Savage B-Mag Aluminum	Std	7D30K04 \$ 35.99

Orders: 800-741-0015

order on the web  
**brownells.com**

**BROWNELLS** PAGE 275



## WARNE MAXIMA RINGS



Strong, All-Steel With Adjustable Levers;  
Fit Weaver-Style Bases

Give any gun equipped with Weaver-style bases the good looks and quick-detach/return-to-zero advantages of Warne rings. Just two turns let you tip the ring off the base. Levers can be easily repositioned so both rest at the same angle. Models available for 1", 30mm and 34mm scope tubes.

**SPECS:** Steel, powder-coated, Gloss Black, Matte Black, or Silver. Height measured from top of base to inside bottom of ring. Available in Low, .250" (6.35mm), Medium, .375" (9.5mm), or High, .525" (13.3mm).

STOCK #	FITS	HEIGHT	FINISH	PRICE
#947-623-000	1"	LOW	Matte Black	7D53D54 \$ 62.79
#947-623-100	1"	MED	Matte Black	7D53L54 \$ 62.79
#947-623-200	1"	HIGH	Matte Black	7D62I09 \$ 68.99
#947-630-000	30mm	LOW	Matte Black	7D67H99 \$ 79.59
#947-630-100	30mm	MED	Matte Black	7D67F99 \$ 79.59
#947-630-200	30mm	HIGH	Matte Black	7D67A99 \$ 79.59
#947-000-256	34mm	LOW	Matte Black	7D78A19 \$ 91.99
#947-000-257	34mm	MED	Matte Black	7D78N19 \$ 91.99
#947-000-258	34mm	HIGH	Matte Black	7D78N19 \$ 91.99

## WARNE

## MAXIMA RUGER®-BASE RINGS

Permanent Mount, Smooth Profile  
Or Quickly Removable QD



Vertically split rings mount directly to the factory integral bases on Ruger revolvers, bolt actions, single shots and the Mini's. Four TORX head screws solidly lock rings to scope and base. Solid stainless steel lug provides improved strength; won't deform under heavy recoil.

**SPECS:** MIM steel. Powder coat, matte black finish. Heights measured from top of base to inside bottom of ring. Sold per set (front and rear) only.

STOCK #	DIAMETER	FINISH	HEIGHT	PRICE
<b>RUGER-BASE PERMANENT RINGS NO.1, NO.3, 77/22®, MINI-14® &amp; MINI-THIRTY®, REDHAWK®</b>				
#947-000-019	1"	Mat	Med - .460"	7D43B34 \$ 50.39
#947-000-021	1"	Mat	High - .585"	7D42E07 \$ 50.39
<b>RUGER-BASE PERMANENT RINGS M77® &amp; M77 MARK II, BLACKHAWK® HUNTER, SUPER REDHAWK</b>				
#947-000-025	1"	Mat	Med - .460"	7D42D07 \$ 50.39
#947-000-027	1"	Mat	High - .585"	7D42H07 \$ 50.39

**MAXIMA RUGER-BASE QD RINGS** - Adjustable lever rings mount to factory integral bases. Provides true, quick-detach capability. Levers may be aligned after tightening. Four, TORX head screws solidly lock rings to scope.

**SPECS:** MIM Steel. Powder coat, Gloss black (Reg) or Matte black (Mat) in 1" (25.4mm) dia. only. Heights measured from top of base to inside bottom of ring. Medium: .460" (11.7mm). High: .585" (14.9mm). Sold per set (front and rear) only.

STOCK #	DIA/HEIGHT	FINISH	PRICE
<b>RUGER-BASE QD RINGS NO.1, NO.3, 77/22, MINI-14 &amp; MINI-THIRTY, REDHAWK</b>			
#947-000-050	1"/Med	Mat	7D77A34 \$ 90.79
#947-000-052	1"/High	Mat	7D75H80 \$ 90.79
<b>RUGER-BASE QD RINGS FOR M77 &amp; M77 MARK II, SUPER REDHAWK</b>			
#947-000-056	1"/Med	Mat	7D77N34 \$ 90.79

## WARNE

## EUROPEAN DOVETAIL MAXIMA RINGS



Fits Tikka, BRNO/CZ 527 & BRNO  
Integral Bases

Vertically split, rings attach directly to the factory integral dovetails on Tikka, BRNO/CZ 527 and BRNO rifles. TORX screws lock scope, rings and rifle into one solid unit.

STOCK #	DIA/HEIGHT	FINISH	PRICE
<b>TIKKA-BASE PERMANENT RINGS</b>			
#947-000-035	1"/Med	Matte	7D48B59 \$ 53.19
#947-000-036	1"/High	Matte	7D48N59 \$ 53.19
#947-000-038	30mm/High	Matte	7D50N39 \$ 55.19
<b>16MM BRNO/CZ-BASE PERMANENT RINGS</b>			
#947-000-114	1"/Med	Matte	7D43M34 \$ 50.39
#947-000-115	1"/High	Matte	7D43E34 \$ 50.39
#947-000-117	30mm/Med	Matte	7D45A04 \$ 52.39
#947-000-118	30mm/High	Matte	7D45J04 \$ 52.39

## WARNE

## MAXIMA TPA RINGS

Rock Solid Mounting;  
Smooth, Snag-Free Style



Two, socket-head cap screws positively clamp these vertical-split steel rings to any Weaver-style base. Gives a nicely finished look. Hefty steel recoil lug prevents shifting and loss of zero. Choice of three finishes: Gloss Black (GB), Matte Black (MB), or Silver (SIL). Height measured from top of base to inside bottom of ring.

STOCK #	FINISH	HEIGHT	PRICE
<b>1" MAXIMA TPA RINGS</b>			
#947-005-111	GB	Low (.250")	7D00ITG \$ 41.99
#947-005-112	MB	Low (.250")	7D32G39 \$ 35.99
#947-005-113	SIL	Low (.250")	7D00FMH \$ 41.99
#947-005-121	GB	Medium (.375")	7D00LXB \$ 41.99
#947-005-122	MB	Medium (.375")	7D32N39 \$ 35.99
#947-005-123	SIL	Medium (.375")	7D00MMC \$ 41.99
#947-005-131	GB	High (.525")	7D00CXC \$ 41.99
#947-005-132	MB	High (.525")	7D33D29 \$ 36.12
#947-005-133	SIL	High (.525")	7D00AGA \$ 41.99
<b>30MM MAXIMA TPA RINGS</b>			
#947-005-312	MB	Low (.250")	7D43B19 \$ 47.59
#947-005-322	MB	Medium (.375")	7D43K19 \$ 47.59
#947-005-332	MB	High (.525")	7D41A64 \$ 48.02
<b>34MM MAXIMA TPA RINGS</b>			
#947-000-259	MB	Low (.250")	7D56I69 \$ 62.79
#947-000-260	MB	Medium (.375")	7D56H69 \$ 62.79
#947-000-261	MB	High (.525")	7D56P69 \$ 62.79

Follow Us • Friend Us • Like Us  
Go online for special promotions, contests and news.  
Leave your comments or suggestions!

STOCK #	DIA/HEIGHT	FINISH	PRICE
<b>19MM BRNO-BASE PERMANENT RINGS</b>			
#947-000-040	1"/Med	Matte	7D43K34 \$ 50.39
#947-000-041	1"/High	Matte	7D43L34 \$ 50.39

**MAXIMA TIKKA & BRNO QD RINGS** - True, QD rings mount directly to the factory integral bases. Levers can be easily repositioned so both rest at the same angle.

**SPECS:** MIM Steel, powder coated black, matte. Height measured from top of base to inside bottom of ring. Medium - .425" (8.9mm), High - .535" (13.6mm).

STOCK #	DIA/HEIGHT	FINISH	PRICE
<b>TIKKA-BASE QD RINGS</b>			
#947-000-066	1"/Med	Matte	7D78P47 \$ 93.99
#947-000-069	30mm/High	Matte	7D92C16 \$ 110.39
<b>19MM BRNO-BASE QD RINGS</b>			
#947-000-071	1"/Med	Matte	7D77G34 \$ 90.79
#947-000-072	1"/High	Matte	7D75H80 \$ 90.79
#947-000-074	30mm/High	Matte	7D87C81 \$ 105.19

## WEAVER

## TOP MOUNT RINGS

Now In Stainless Finish,  
Too!



Heights: **Low** and **Medium** for scopes w/objective diameters to approximately 1.75" (44.45mm). **High** for objectives above 1.75". **Extra High** for scopes with objectives up to 60mm.

**SPECS:** Aluminum lower; steel cap, screws, crossbolt and nut. **Satin Blue, Matte Blue** or brushed **Stainless** finish. Height (above base): 1" diameter - Low, .090" (2.28mm); Med., .164" (4.16mm); High, .332" (8.43mm); X-High, .560" (14.2mm). 30mm diameter - Low, .290" (7.3mm); High, .485" (12mm). 2 oz. (56 g).

STOCK #	HEIGHT	FINISH	SIZE	PRICE
#955-490-001	Low	Satin	1"	5E25G69 \$ 26.99
#955-490-003	Low	Matte	1"	5E25D69 \$ 26.99
#955-490-201	Med.	Satin	1"	5E25D69 \$ 26.99
#955-490-203	Med.	Matte	1"	5E00AFI \$ 21.99
#955-490-301	High	Satin	1"	5E25H69 \$ 26.99
#955-490-303	High	Matte	1"	5E25I69 \$ 26.99
#955-490-302	High	Stainless	1"	5E37C99 \$ 39.99
#955-490-401	X-High	Satin	1"	5E25D69 \$ 26.99
#955-490-403	X-High	Matte	1"	5E25M69 \$ 26.99
#955-491-210	Low	Matte	30mm	5E24F69 \$ 25.99
#955-491-200	High	Matte	30mm	5E24N69 \$ 25.99

## TOP MOUNT EXTENSION RINGS

- Extension Top Mount Rings, 1" and 30mm diameter. Moves eye relief 1/4", forward or backward. Sold by the pair, 1 standard and 1 extension ring or "Dual" style with two extension rings.



STOCK #	HEIGHT	FINISH	SIZE	PRICE
#955-490-500	High	Satin	1"	5E28K49 \$ 29.99
#955-490-503	High	Matte	1"	5E28C49 \$ 29.99
#955-490-610	Hi-Dual	Satin	1"	5E00JVQ \$ 30.99
#955-490-450	Hi-Dual	Matte	1"	5E00IJA \$ 30.99
#955-000-079	High	Matte	30mm	5E00AIE \$ 35.99

## WEAVER

## QUAD LOCK RINGS



Four Caps Give Double The  
Holding Power

Two caps per base provide twice the clamping power. 210° coverage provides even clamping pressure that pulls scope into base, prevents scope from rotating when tightening caps. Aluminum construction keeps weight to a minimum.

**SPECS:** Aluminum, gloss black, matte black, or natural silver finish. Height from top of base to bottom of ring: Medium - .160" (4mm), High - .328" (8.3mm). Standard and Extension (Ext) rings fit Weaver-style bases. Extension sets include one standard ring and one extension ring. Others have two standard rings. **Tip-Off** rings fit 1/2" grooved .22 rimfire receivers.

STOCK #	STYLE	FINISH	PRICE
#955-000-001	1" Medium	Gloss	5E16F19 \$ 17.99
#955-000-002	1" High	Gloss	5E16Q19 \$ 17.99
#955-000-003	1" High Ext.	Gloss	5E16A14 \$ 18.99
#955-000-004	1" Medium	Matte	5E16G19 \$ 17.99
#955-000-005	1" High	Matte	5E16Q19 \$ 17.99
#955-000-006	1" High Ext.	Matte	5E16F14 \$ 18.99
#955-000-104	1" Medium	Silver	5E13H29 \$ 13.99
#955-000-105	1" High	Silver	5E11B89 \$ 13.99
#955-000-102	1" Tip Off	Matte	5E00ESC \$ 15.99

WEAVER .22 RIMFIRE / AIRGUN  
TIP-OFF® MOUNT

Easy-To-Install Rimfire/  
Airgun Rings With  
Built-In Bases



These 1" rings have integral bases for use on .22 rimfire rifles and airguns with 1/8" (9.5mm) dovetail receiver grooves. Separate bases not required - it's all right here! Neat, symmetrical caps with two screws on each side.

**SPECS:** Base - Aluminum, anodized, black. Cap - Steel, black finish. Accepts 1" (2.5cm) scopes. Sold in pairs.

#955-494-101 Pro-View Tip-Off Mount, 5E00LGN. . . . \$ 19.99

## WEAVER

## TACTICAL SCOPE RINGS



For Ultra-Secure Mounting Of  
Large-Objective Scopes

Oversized rings provide extra contact area for ultra-secure mounting of large optics on hard-recoiling, long-range rifles such as sniper rifles. Fits all Weaver-style bases. Six no-strip, no-slip Torx® screws hold down the ring cap to ensure the scope keeps its position even under heavy recoil. Oversize hex nuts allow quick removal or attachment of optics in dynamic situations.

**SPECS:** Aluminum, hardcoat anodized, matte black. Height measured from top of base to underside of scope body. 1" High - .400" high. Accepts scopes with objectives up to 44mm dia. 1" Extra High - .525" high. Accepts objectives up to 50mm dia. 30mm High - .495" high. Accepts objectives up to 44mm dia.

#955-000-138 1" Tactical Rings, High, 5E37H99 . . . \$ 39.99  
#955-000-139 1" Tactical Rings, Extra-High, 5E37C99. . . \$ 39.99  
#955-000-140 30mm Tactical Rings, High, 5E37Q99. . . \$ 39.99

GUARANTEED. FOREVER.®

SINCE 1939





**CX™ NEW**

Copper alloy eXpanding bullet with Heat Shield® tip.

Tough monolithic bullet delivers high weight retention and maximum penetration.



**ELD-X®**

Extremely Low Drag™ eXpanding bullet with Heat Shield® tip.

Best extended range terminal performance bullet available.



**V-MAX®**

Ideal for varmint & predator hunting.

Rapid fragmentation upon impact for all varmints big or small.



**SST®**

Super Shock Tip™ for rapid expansion and energy transfer.

Hard-hitting performance for all medium and large game.



**InterLock®**


Classic spire point bullet design.

InterLock ring keeps core and jacket together on medium and large game.

# THE PERFECT BULLET

FOR ANY HUNT.

Whatever the quarry, Hornady has a bullet suited for every application. Plus, we offer accurate and dependable factory-loaded ammunition and innovative reloading products that satisfy even the most demanding hunters and shooters. **THE CHOICE IS YOURS!**

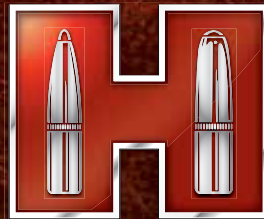

**Hornady®**

*Accurate. Deadly. Dependable.*

Find the bullet that fits your hunt at [hornady.com](http://hornady.com).



## WEAVER TOP MOUNT BASES



## One- &amp; Two-Piece Bases For Rifles, Shotguns, Handguns

Lightweight aluminum bases fit a wide range of modern and older rifles, plus shotguns and long range handguns. Sold each, order front and rear base. One piece bases and base pair sets available for some models. Base pair sets are marked with \* or \*\*. **SPECS:** Aluminum, polished blue finish except Matte (M), Silver (S). Extension bases: Front (F), Rear (R). Fits Top Mount and See-Thru Mount Rings.

RIFLE MODEL	STK# REAR	STK# FRONT	STK# 1-PC/SET
<b>ANSCHUTZ</b>			
Mark 12	#955-010-016 (16)	#955-010-016 (16)	NA
54, 54MS, 64, 64ms, 164, 1413, 1422, 1424, 1430, 1432, 1433, 1434, 1522, 1530, 1532, 1534	#955-010-091 (91)	#955-010-091 (91)	NA
153 Deluxe	#955-010-019 (19)	#955-010-019 (19)	NA
1568	#955-010-061 (61)	#955-010-146 (46M)	NA
	#955-010-046 (46)	NA	NA
	#955-010-161 (61M)	NA	NA
<b>AUSTIN &amp; HALLECK</b>			
420 (inline M/L)	#955-010-085 (85)	#955-010-085 (85)	NA
<b>BENELLI</b>			
Super Blk Eagle, S. Blk Eagle II	NA	NA	#955-010-093 (93)
Nova	NA	NA	#955-010-004 (423M)
<b>BROWNING</b>			
A-Bolt after 1996, except WSSM	#955-010-047 (47)	NA	NA
A-Bolt, A-Bolt 22 before 1996	#955-010-047 (47)	#955-010-047 (47)	NA
	#955-010-147 (47M)	#955-010-147 (47M)	NA
A-Bolt WSSM, 204 & 223	NA	#955-010-047 (47)	NA
A-Bolt European model	#955-010-085 (85)	#955-010-085 (85)	NA
A-Bolt Shotgun	#955-010-147 (47M)	#955-010-419 (419M)	NA
BBR FN Mauser action	#955-010-045 (45)	#955-010-046 (46)	NA
	NA	#955-000-121 (45M, 46M)*	NA
BBR F/extension	#955-010-045 (45)	#955-010-402 (402)	NA
BBR long & short action	#955-010-047 (47)	#955-010-046 (46)	#955-000-125 (47M, 46M)*
BBR F/extension	#955-010-047 (47)	NA	NA
	#955-010-147 (47M)	NA	NA
BAR, BAR II, Mark II, semi-auto	#955-010-054 (54)	#955-010-054 (54)	NA
	NA	#955-000-127 (54M, 54M)*	NA
BLR	#955-010-025 (25)	#955-010-025 (25)	NA
BLR flat top receiver	#955-010-028 (28)	#955-010-028 (28)	NA
T-Bolt (new model)	#955-010-015 (15)	#955-010-015 (15)	NA
1885 Hi Wall octagon barrel	NA	#955-010-011 (11)	NA
	NA	#955-010-029 (29)	NA
22 Auto base attaches to barrel extends over receiver. Norinco clones.	NA	NA	#955-010-060 (60A)
52	#955-010-085 (85)	#955-010-085 (85)	NA
<b>BSA</b>			
Monarch med./L action, F/ext.	#955-010-036 (36)	#955-010-040 (40A)	NA
	#955-010-136 (36M)	#955-010-041 (40A-M)	NA

BSA continued next column

RIFLE MODEL	STK# REAR	STK# FRONT	STK# 1-PC/SET
Monarch, CF2 long action	#955-010-036 (36)	#955-010-035 (35)	#955-000-117 (36M, 35M)*
Medium action one-piece base	NA	NA	#955-000-118 (36S, 35S)*
Long action one-piece base	NA	NA	#955-010-097 (97)
Other high powers	#955-010-028 (28)	#955-010-028 (28)	NA
<b>CHARLES DALY</b>			
Mini Mauser	NA	#955-011-071 (71A)	NA
98	#955-010-055 (55)	#955-010-035 (35)	NA
<b>CIL</b>			
871	#955-010-062 (62)	NA	NA
900	#955-010-019 (19)	#955-010-019 (19)	NA
950, 950C	#955-010-061 (61)	#955-010-046 (46)	#955-000-122 (61M, 46M)*
	#955-010-161 (61M)	#955-010-146 (46M)	NA
972-C	#955-010-045 (45)	#955-010-046 (46)	#955-000-121 (45M, 46M)*
<b>COLT</b>			
Coltsman SA round receiver	#955-010-025 (25)	#955-010-025 (25)	NA
Coltsman LA round receiver	#955-010-054 (54)	#955-010-054 (54)	#955-000-127 (54M, 54M)*
Sauer	#955-010-035 (35)	#955-010-035 (35)	NA
	#955-010-135 (35M)	#955-010-135 (35M)	NA
Sauer, F/R/extension	#955-010-040 (40A)	#955-010-040 (40A)	NA
	#955-010-041 (40A-M)	#955-010-041 (40A-M)	NA
57	#955-010-045 (45)	#955-010-046 (46)	#955-000-121 (45M, 46M)*
<b>COOEY</b>			
71	#955-010-047 (47)	#955-010-046 (46)	#955-000-125 (47M, 46M)*
	#955-010-147 (47M)	#955-010-146 (46M)	NA
<b>CVA</b>			
Round Receiver	#955-010-418 (418M)	#955-010-418 (418M)	NA
<b>ENFIELD receiver cut down like:</b>			
Remington 30	#955-010-011 (11)	#955-010-011 (11)	NA
Remington 721	#955-010-036 (36)	#955-010-035 (35)	NA
	#955-010-136 (36M)	#955-010-135 (35M)	NA
Remington 721 F/ext.	#955-010-036 (36)	#955-010-040 (40A)	NA
	#955-010-136 (36M)	#955-010-041 (40A-M)	NA
Winchester 70	#955-010-047 (47)	#955-010-046 (46)	#955-000-125 (47M, 46M)*
	#955-010-147 (47M)	#955-010-146 (46M)	NA
Winchester 70 F/ext.	#955-010-047 (47)	#955-010-402 (402)	NA
	#955-010-147 (47M)	NA	NA
<b>GARCIA</b>			
73	NA	NA	#955-010-053 (53)
<b>H&amp;R</b>			
65, 165, 150, 151 semi-auto	#955-010-018 (18)	#955-010-018 (18)	NA
250, 251, 264, 265, 365, 450, 550	#955-010-018 (18)	#955-010-016 (16)	NA
300, 301, 330, 370 before 1973	#955-010-045 (45)	#955-010-046 (46)	#955-000-121 (45M, 46M)*
300, 301 pre 1973, F/extension	#955-010-045 (45)	#955-010-402 (402)	NA
300, 301 short action post 1973	#955-010-054 (54)	#955-010-046 (46)	NA
300, 301 post 1973, F/extension	#955-010-054 (54)	#955-010-402 (402)	NA
317, 322	#955-010-011 (11)	#955-010-035 (35)	NA
317, 322, F/extension	#955-010-011 (11)	#955-010-040 (40A)	NA

H&amp;R continued next column

RIFLE MODEL	STK# REAR	STK# FRONT	STK# 1-PC/SET
Topper 30, 22 Jet, 158 before 1973	NA	NA	#955-010-060 (60A)
Topper 155, 157, 158C after 1973	NA	NA	#955-010-082 (82)
700	NA	NA	#955-010-087 (87)
755, 765, 852, 865	NA	#955-010-021 (21)	NA
800	#955-010-012 (12)	#955-010-012 (12)	NA
980 Ultra, 232C 10 Gauge	#955-010-019 (19)	#955-010-019 (19)	NA
<b>HENRY</b>			
H009 (.30-30) & H010 (.45-70)	NA	NA	#955-010-063 (63B)
<b>HERTERS</b>			
U9 BSA dovetail action	#955-010-028 (28)	#955-010-028 (28)	NA
U-9 round receiver	#955-010-036 (36)	#955-010-035 (35)	NA
J-9 FN action	#955-010-045 (45)	#955-010-046 (46)	#955-000-121 (45M, 46M)*
<b>HIGH STANDARD</b>			
High-Power	#955-010-055 (55)	#955-010-046 (46)	NA
High-Power F/extension	#955-010-055 (55)	#955-010-040 (40A)	NA
<b>HOWA</b>			
1500	#955-010-036 (36)	#955-010-035 (35)	#955-000-117 (36M, 35M)*
	#955-010-136 (36M)	#955-010-135 (35M)	#955-000-118 (36S, 35S)*
1500, F/extension	#955-010-036 (36)	#955-010-040 (40A)	NA
	#955-010-136 (36M)	#955-010-041 (40A-M)	NA
LSA-55, LSA-65	#955-010-061 (61)	#955-010-061 (61)	NA
	#955-010-161 (61M)	#955-010-161 (61M)	NA
<b>JAPANESE</b>			
Arisaka 6.5mm, 7.7mm	NA	NA	#955-010-070 (70)
<b>KIMBER</b>			
Win 70 style 82C	NA	#955-010-046 (46)	NA
	#955-010-054 (54)	#955-010-054 (54)	NA
<b>KNIGHT</b>			
MK 85 Muzzle-loader	#955-010-061 (61)	#955-010-061 (61)	NA
	#955-010-161 (61M)	#955-010-161 (61M)	NA
LK-93, Wolverine, Legend	#955-010-045 (45)	#955-010-045 (45)	NA
<b>LONE EAGLE</b>			
SSP 91 Pistol	#955-010-016 (16)	#955-010-016 (16)	NA
<b>MARLIN</b>			
9, 36, 45, 62, 93, 336, 375, 444, 1893, 1894, 1895, Camp 9 Carbine, 922M, 989, Glenfield 30	NA	NA	#955-010-063 (63B)
	NA	NA	#955-000-091 (63B-S)
	NA	NA	#955-000-128 (336M, 336M)*
A-1, 50	#955-010-015 (15)	#955-010-015 (15)	NA
MR7	#955-010-047 (47)	#955-010-046 (46)	#955-000-125 (47M, 46M)*
	#955-010-147 (47M)	#955-010-146 (46M)	NA
MR-7 F/extension	#955-010-047 (47)	#955-010-402 (402)	NA
	#955-010-147 (47M)	NA	NA
39A	#955-010-029 (29)	#955-010-016 (16)	NA
455	#955-010-045 (45)	#955-010-046 (46)	#955-000-121 (45M, 46M)*
455, F/extension	#955-010-045 (45)	#955-010-402 (402)	NA
88, 89, 98, 917	#955-010-018 (18)	#955-010-018 (18)	NA
80, 81, 980	#955-010-012 (12)	#955-010-012 (12)	NA

RIFLE MODEL	STK# REAR	STK# FRONT	STK# 1-PC/SET
<b>MAUSER</b>			
Bauer 3000, 4000	#955-010-068 (68)	#955-010-046 (46)	NA
Bauer F/ext	#955-010-068 (68)	#955-010-402 (402)	NA
FN, HVA, Model 95, 98 large ring	#955-010-045 (45)	#955-010-046 (46)	#955-000-121 (45M, 46M)*
FN, HVA, 95, 98 large ring F/ext	#955-010-045 (45)	#955-010-402 (402)	NA
Swedish 96, HVA, small ring	#955-010-055 (55)	#955-010-046 (46)	NA
Swede 96, HVA small ring F/ext	#955-010-055 (55)	NA	NA
Mark X	#955-010-055 (55)	#955-010-020 (20A)	NA
Mini-Mark X	NA	#955-011-071 (71A)	NA
<b>MOSSBERG</b>			
25, 26, 42, 46M, 140, 142, 146, also 45, 46 w/ 3/4" dia. bbls.	#955-010-012 (12)	NA	NA
25, 26, 42, 46M, 140, 142, 146, also 45, 46 w/ 3/4" dia. bbls.	NA	#955-010-013 (13)	NA
40	#955-010-016 (16)	#955-010-021 (21)	NA
43, 44, 144, 468T, 35. Also models 45, 46, 46A, 46B w/ 13/16" dia. bbls.	#955-010-012 (12)	#955-010-016 (16)	NA
50, 51, 151, 152, 350, 352	#955-010-012 (12)	NA	NA
43, 44, 144, 468T, 35. Also models 45, 46, 46A, 46B w/ 13/16" dia. bbls.	NA	#955-010-012 (12)	NA
400	#955-010-020 (20A)	#955-010-042 (42)	NA
500A, 600 shotguns before 1997	NA	NA	#955-010-088 (88)
500 after 1997, 835 shotguns	NA	NA	#955-000-084 (417M)
640	NA	NA	#955-000-132 (500M, 500M)**
	NA	NA	#955-010-063 (63B)
	NA	NA	#955-010-091 (63B-S)
680, 695, 800	#955-010-055 (55)	#955-010-055 (55)	NA
810, RM7	#955-010-025 (25)	#955-010-011 (11)	NA
1500, 1550, 1700	#955-010-036 (36)	#955-010-035 (35)	#955-000-117 (36M, 35M)*
	#955-010-136 (36M)	#955-010-135 (35M)	#955-000-118 (36S, 35S)*
1500, 1550, 1700, F/extension	#955-010-036 (36)	#955-010-040 (40A)	NA
	#955-010-136 (36M)	#955-010-041 (40A-M)	NA
<b>MUSGRAVE</b>			
Mark I, Mark II	#955-010-054 (54)	#955-010-046 (46)	NA
Mark I, II F/extension	#955-010-054 (54)	#955-010-402 (402)	NA
Mark III, Mark IV	#955-010-045 (45)	#955-010-046 (46)	#955-000-121 (45M, 46M)*
Mark III, IV, F/extension	#955-010-045 (45)	#955-010-402 (402)	NA
<b>NEW ENGLAND FIREARMS</b>			
Handy Rifle	NA	NA	#955-010-045 (45)
10 gauge shotgun	#955-010-019 (19)	#955-010-019 (19)	NA

GUARANTEED. FOREVER.<sup>®</sup>  
SINCE 1939

RIFLE MODEL	STK# REAR	STK# FRONT	STK# 1-PC/SET
1000, 1000C, 1100, 1200, 1700	<b>#955-010-045</b> (45)	<b>#955-010-046</b> (46)	<b>955-000-121</b> (45M, 46M)*
1000, 1100, 1200, 1700, F/Ext	<b>#955-010-045</b> (45)	<b>955-010-402</b> (402)	NA
<b>REMINGTON</b>			
700, 78, 40-XL, 721, 722, 725, 700ML, LA/SA	<b>955-010-036</b> (36)	<b>955-010-035</b> (35)	<b>#955-000-117</b> (36M, 35M)*
700, 78, 40-XL, 721, 722, 725, 700ML, LA/SA, F/extension	<b>955-010-136</b> (36M)	<b>955-010-135</b> (35M)	<b>955-000-118</b> (36S, 35S)*
700, 78, 40-XL, 721, 722, 725, 700ML, LA/SA, F/extension	<b>955-010-036</b> (36)	<b>#955-010-040</b> (40A)	NA
700, 78, 40-XS short action one-piece	<b>955-010-136</b> (36M)	<b>955-010-041</b> (40A-M)	NA
788	<b>955-010-076</b> (76)	<b>955-010-075</b> (75)	NA
7 new model w/4-hole receiver	<b>955-010-006</b> (421M)	<b>955-010-135</b> (35M)	NA
7 new model F/ ext., 673	<b>955-010-006</b> (421M)	<b>955-010-041</b> (40A-M)	NA
7, 600, 660, XP-100 single shot (3-hole)	NA	NA	<b>955-010-070</b> (70)
4, 6, 74, 76, 7400, 7600, 7615	NA	NA	<b>#955-010-093</b> (93)
740, 742, 760	NA	NA	<b>955-010-062</b> (62)
	NA	NA	<b>#955-000-129</b> (602M, 601M)*
10, 11, 12, 34, 341, 510, 512, 521T	<b>#955-010-043</b> (43)	<b>955-010-042</b> (42)	NA
12A, 121 w/ 3/4" dia. barrels	<b>955-010-018</b> (18)	<b>955-010-013</b> (13)	NA
Genesis Muzzle-loader	<b>#955-010-418</b> (418M)	<b>#955-010-418</b> (418M)	NA
121 w/ 13/16" dia. barrel	<b>955-010-018</b> (18)	NA	NA
14, 141	<b>955-010-020</b> (20A)	NA	NA
24, 241	NA	NA	<b>955-010-060</b> (60A)
25	<b>955-010-018</b> (18)	<b>#955-010-021</b> (21)	NA
30, 720	<b>955-010-011</b> (11)	<b>955-010-011</b> (11)	NA
33	NA	<b>955-010-013</b> (13)	NA
513S, 513T	<b>#955-010-043</b> (43)	NA	NA
514	<b>#955-010-016</b> (16)	<b>#955-010-021</b> (21)	NA
514 if not drilled & tapped, 550	<b>#955-010-012</b> (12)	<b>#955-010-012</b> (12)	NA
541S, 541T	<b>955-010-015</b> (15)	<b>955-010-015</b> (15)	NA
597	NA	NA	<b>955-010-414</b> (414M)
Shotgun (all drilled & tapped models)	<b>955-000-133</b> (429M)	NA	NA
Single Shot Firearms	NA	NA	<b>#955-010-092</b> (92A)
<b>RUGER®</b>			
10/122*	NA	NA	<b>#955-000-130</b> (504M, 503M)*
No. 3	<b>955-010-085</b> (85)	<b>#955-010-086</b> (86)	NA
77 round top	<b>955-010-035</b> (35)	NA	NA
44 Magnum Deer Stalker	<b>955-010-047</b> (47)	<b>955-010-068</b> (68)	NA
<b>SAKO</b>			
Finnwolf	NA	NA	<b>955-010-053</b> (53)
Whitetail Hunter	<b>#955-010-061</b> (61)	<b>#955-010-061</b> (61)	NA
	<b>#955-010-161</b> (61M)	<b>#955-010-161</b> (61M)	NA

SAKO continued next column

RIFLE MODEL	STK# REAR	STK# FRONT	STK# 1-PC/SET
72, 75, 78	<b>955-010-085</b> (85)	<b>955-010-085</b> (85)	NA
<b>SAUER</b>			
200	<b>955-010-035</b> (35)	<b>955-010-035</b> (35)	NA
	<b>955-010-135</b> (35M)	<b>955-010-135</b> (35M)	NA
200 F/R/ Extension	<b>#955-010-040</b> (40A)	<b>#955-010-040</b> (40A)	NA
SHR 970	<b>955-010-041</b> (40A-M)	<b>955-010-041</b> (40A-M)	NA
	<b>955-010-025</b> (25)	<b>#955-010-025</b> (25)	NA
<b>SAVAGE</b>			
99, 189S, 1899	<b>#955-010-014</b> (14)	<b>955-010-019</b> (19)	NA
110 through 116	NA	NA	<b>955-010-413</b> (413)
110, 111, 116, 10, 11, 16	<b>#955-010-061</b> (61)	<b>#955-010-046</b> (46)	<b>955-000-122</b> (61M, 46M)*
11, 16	<b>955-010-161</b> (61M)	<b>#955-010-146</b> (46M)	NA
110, 116, 10, 16	<b>#955-010-061</b> (61)	<b>955-010-402</b> (402)	NA
F/Ext.	<b>#955-010-161</b> (61M)	NA	NA
10-16, 110-116, w/AccuTrigger, Stevens 200	<b>955-010-146</b> (46M)	<b>#955-010-046</b> (46)	<b>#955-000-123</b> (46M, 46M)*
	<b>955-012-046</b> (46)	<b>955-010-146</b> (46M)	NA
3	<b>#955-010-016</b> (16)	<b>#955-010-021</b> (21)	NA
4, 5	<b>#955-010-012</b> (12)	<b>955-010-013</b> (13)	NA
6, 7	<b>955-010-012</b> (12)	<b>#955-010-012</b> (12)	NA
19, 23	<b>955-010-015</b> (15)	<b>#955-010-016</b> (16)	NA
24, 24V	NA	NA	<b>#955-010-074</b> (74)
29 round barrel	<b>955-010-011</b> (11)	NA	NA
40, 45	<b>955-010-011</b> (11)	<b>955-010-011</b> (11)	NA
67	NA	NA	<b>#955-010-093</b> (93)
93	<b>#955-010-016</b> (16)	<b>#955-010-016</b> (16)	NA
170	NA	NA	<b>#955-010-062</b> (62)
219	<b>#955-010-012</b> (12)	NA	NA
<b>SCHULTZ &amp; LARSEN</b>			
	<b>#955-010-054</b> (54)	<b>#955-010-046</b> (46)	NA
<b>SEARS</b>			
50, 51 FN Action	<b>#955-010-045</b> (45)	<b>#955-010-046</b> (46)	<b>955-000-121</b> (45M, 46M)*
50, 51 F/ Extension	<b>#955-010-045</b> (45)	<b>955-010-402</b> (402)	NA
51L	<b>955-010-055</b> (55)	<b>#955-010-046</b> (46)	NA
53	<b>955-010-047</b> (47)	<b>#955-010-046</b> (46)	<b>955-000-125</b> (47M, 46M)*
	<b>955-010-147</b> (47M)	<b>#955-010-146</b> (46M)	NA
53 F/Extension	<b>955-010-047</b> (47)	<b>955-010-402</b> (402)	NA
	<b>955-010-147</b> (47M)	NA	NA
<b>SHILEN</b>			
Flat top receiver	<b>#955-010-061</b> (61)	<b>#955-010-061</b> (61)	NA
	<b>#955-010-161</b> (61M)	<b>#955-010-161</b> (61M)	NA
Round receiver	<b>955-010-035</b> (35)	<b>955-010-035</b> (35)	NA
	<b>955-010-135</b> (35M)	<b>955-010-135</b> (35M)	NA
<b>SMITH &amp; WESSON</b>			
Mauser Action	<b>955-010-055</b> (55)	<b>#955-010-046</b> (46)	NA
1500, 1600, 1700	<b>955-010-036</b> (36)	<b>955-010-035</b> (35)	<b>#955-000-117</b> (36M, 35M)*
	<b>955-010-136</b> (36M)	<b>955-010-135</b> (35M)	NA
1500, 1550, 1700	NA	NA	<b>955-000-118</b> (36S, 35S)*
1500, 1600, 1700 F/Ext.	<b>955-010-036</b> (36)	<b>#955-010-040</b> (40A)	NA
	<b>955-010-136</b> (36M)	<b>955-010-041</b> (40A-M)	NA
<b>SPRINGFIELD</b>			
'03	<b>#955-010-054</b> (54)	<b>955-010-055</b> (55)	NA
03-A3	<b>955-010-059</b> (59)	<b>#955-010-045</b> (45)	NA
<b>STEVENS</b>			
53	<b>#955-010-016</b> (16)	<b>#955-010-021</b> (21)	NA
56, 66	<b>#955-010-012</b> (12)	<b>955-010-013</b> (13)	NA
57, 76, 417-1/2, 762	<b>#955-010-012</b> (12)	<b>#955-010-012</b> (12)	NA
110E	<b>#955-010-061</b> (61)	<b>#955-010-046</b> (46)	NA
	<b>#955-010-161</b> (61M)	<b>#955-010-146</b> (46M)	NA
416	<b>955-010-018</b> (18)	NA	NA

STEVENS continued next column

RIFLE MODEL	STK# REAR	STK# FRONT	STK# 1-PC/SET
417	<b>955-010-015</b> (15)	<b>955-010-015</b> (15)	NA
418, 418-1/2	<b>#955-010-016</b> (16)	<b>#955-010-016</b> (16)	NA
<b>STEVENS-SPRINGFIELD</b>			
83	<b>#955-010-016</b> (16)	<b>#955-010-021</b> (21)	NA
85, 87, 872	<b>#955-010-012</b> (12)	<b>#955-010-012</b> (12)	NA
<b>THOMPSON CENTER</b>			
Contender handgun & carbine	NA	NA	<b>#955-010-092</b> (92A)
Encore handgun & carbine	NA	NA	<b>#955-010-410</b> (410)
Omega Muzzle-loader	NA	NA	<b>#955-010-410</b> (410)
System 1 & Blk Diamond 2 per package	NA	NA	<b>#955-010-411</b> (411)
<b>TIKKA</b>			
Flat receiver	<b>#955-010-061</b> (61)	<b>#955-010-061</b> (61)	NA
<b>TRADITIONS</b>			
Whitetail Hunter	<b>#955-010-161</b> (61M)	<b>#955-010-161</b> (61M)	NA
In-Line Buck Hunter	<b>#955-010-075</b> (75)	<b>#955-010-075</b> (75)	NA
<b>VOERE</b>			
2150, 2165, Mauser action	<b>#955-010-045</b> (45)	<b>#955-010-046</b> (46)	<b>#955-000-121</b> (45M, 46M)*
2130	<b>#955-010-028</b> (28)	<b>#955-010-028</b> (28)	NA
<b>WEATHERBY</b>			
Mark V Magnum	NA	<b>955-010-135</b> (35M)	NA
Vanguard	<b>#955-010-036</b> (36)	<b>#955-010-035</b> (35)	<b>#955-000-118</b> (36S, 35S)*
22-250, 224, 30-06	<b>#955-010-136</b> (36M)	<b>#955-010-135</b> (35M)	NA
Vanguard F/ extension	<b>#955-010-036</b> (36)	<b>#955-010-040</b> (40A)	NA
Others with FN Mauser actions	<b>#955-010-045</b> (45)	<b>#955-010-046</b> (46)	<b>#955-000-121</b> (45M, 46M)*
Lightweight U.S. made actions	<b>#955-010-036</b> (36)	NA	NA
	<b>#955-010-136</b> (36M)	NA	NA
<b>WESTERN FIELD</b>			
730	<b>#955-010-025</b> (25)	NA	NA
<b>WESTERNFIELD</b>			
730	<b>#955-010-011</b> (11)	NA	NA
740	NA	NA	<b>#955-010-063</b> (63B)
	NA	NA	<b>#955-010-091</b> (63B-S)
770	<b>#955-010-055</b> (55)	<b>955-010-020</b> (20A)	NA
775, 780	<b>#955-010-055</b> (55)	<b>#955-010-055</b> (55)	NA
<b>WINCHESTER</b>			
70 long and short action, H&H mags above #1,896,476	<b>#955-010-047</b> (47)	<b>#955-010-146</b> (46M)	<b>#955-000-125</b> (47M, 46M)*
70 LA/SA above #1,896,476	<b>#955-010-047</b> (47)	<b>#955-010-402</b> (402)	NA
F/Ext	NA	NA	<b>#955-010-096</b> (96)
70 long action and H&H mags above #1,896,426	NA	NA	<b>#955-010-046</b> (46)
70 Target, H&H mags up to #1,896,476	NA	<b>#955-010-049</b> (49A)	<b>955-010-402</b> (402)
70 Target up to #1,896,476	NA	NA	NA
F/Ext	NA	NA	NA

WINCHESTER continued next column

RIFLE MODEL	STK# REAR	STK# FRONT	STK# 1-PC/SET
70 WSSM	NA	<b>#955-010-046</b> (46)	NA
03, 63	<b>#955-010-019</b> (19)	NA	NA
05, 07, 10, 95	<b>#955-010-020</b> (20A)	NA	NA
43	<b>#955-010-018</b> (18)	<b>#955-010-018</b> (18)	NA
47, 69A, 72	<b>#955-010-012</b> (12)	NA	NA
52 hole spacing different	<b>#955-010-025</b> (25)	NA	NA
52 hole spacing same	<b>#955-010-046</b> (46)	<b>#955-010-046</b> (46)	<b>#955-000-123</b> (46M, 46M)*
	<b>#955-010-146</b> (46M)	<b>#955-010-146</b> (46M)	NA
	<b>#955-012-046</b> (46)	<b>#955-012-046</b> (46)	NA
52C	<b>#955-010-085</b> (85)	<b>#955-010-085</b> (85)	NA
57, 69	<b>#955-010-012</b> (12)	<b>#955-010-013</b> (13)	NA
60, 67, 68	<b>#955-010-021</b> (21)	<b>#955-010-021</b> (21)	NA
61 round barrel	<b>#955-010-019</b> (19)	<b>#955-010-013</b> (13)	NA
61 octagon barrel	<b>#955-010-025</b> (25)	NA	NA
74	<b>#955-010-012</b> (12)	<b>#955-010-012</b> (12)	NA
75 Sporter	<b>#955-010-015</b> (15)	NA	NA
75 Target	<b>#955-010-015</b> (15)	<b>#955-010-016</b> (16)	NA
77	<b>#955-010-015</b> (15)	NA	NA
88, 100	NA	NA	<b>#955-010-053</b> (53)
94 Big Bore Angle Eject	<b>#955-010-095</b> (95)	<b>#955-010-403</b> (403)	NA
94 Angle Eject except earliest	<b>#955-010-095</b> (95)	<b>#955-010-094</b> (94)	<b>#955-000-131</b> (95M, 94M)*
670, 770	<b>#955-010-047</b> (47)	<b>#955-010-046</b> (46)	<b>#955-000-125</b> (47M, 46M)*
	<b>#955-010-147</b> (47M)	<b>#955-010-146</b> (46M)	NA
670, 770 F/Ext.	<b>#955-010-047</b> (47)	<b>#955-010-402</b> (402)	NA
	<b>#955-010-147</b> (47M)	NA	NA
1300 Shotgun	NA	NA	<b>#955-010-425</b> (416M/54)
Super X Rifle	<b>#955-010-054</b> (54)	<b>#955-010-054</b> (54)	<b>#955-000-127</b> (54M, 54M)*
Small ring Mauser action	<b>#955-010-055</b> (55)	<b>#955-010-046</b> (46)	NA
<b>ZB</b>			
22	NA	<b>#955-010-028</b> (28)	NA
	NA	<b>#955-010-024</b> (24)	NA

### WEAVER TOP MOUNT BASE PRICES



WEAVER

GRAND SLAM BASES



Solid Steel, Two-Piece Bases For Rifles, Hunting Handguns

High-strength, steel bases to fit a wide range of modern and older rifles,

plus some long range handguns. Sold each; order front and rear base. (F) front, (R) rear EXTENSION BASES provide added flexibility for mounting all types of scopes. **USA**  
 SPECS: Steel, blue, matte finish. Fits Weaver Grand Slam, Top Mount, Tip-Off and See-Thru Mount Rings. Includes screws.

RIFLE MODEL	STK# REAR	STK# FRONT
ANSCHUTZ 54, 54MS, 64, 64MS, 164, 1413, 1422, 1424, 1430, 1432, 1433, 1434, 1522, 1530, 1532, 1534	#955-000-040 (S91)	#955-000-040 (S91)
1568	#955-000-033 (S61)	#955-000-026 (S46)
BBR long & short action	NA	#955-000-026 (S46)
BSA Monarch med./L action	#955-000-024 (S36)	#955-000-023 (S35)
Monarch med./L action F/ext.	#955-000-024 (S36)	NA
CHURCHILL Highlander Highlander F/ext.	#955-000-024 (S36)	#955-000-023 (S35)
CIL 950, 950C	#955-000-033 (S61)	#955-000-026 (S46)
950, 950C F/extension	#955-000-033 (S61)	#955-000-081 (S402)
972-C	#955-000-025 (S45)	#955-000-026 (S46)
972-C F/extension	#955-000-025 (S45)	#955-000-081 (S402)
Sauer	#955-000-023 (S35)	#955-000-023 (S35)
57	#955-000-025 (S45)	#955-000-026 (S46)
57 F/extension	#955-000-025 (S45)	#955-000-081 (S402)
COOEY 71	NA	#955-000-026 (S46)
ENFIELD receiver cut down like: Remington 721	#955-000-024 (S36)	#955-000-023 (S35)
Remington 721, F/extension	#955-000-024 (S36)	NA
Winchester 70	NA	#955-000-026 (S46)
H&R 300, 301, 330, 370 pre-1973	#955-000-025 (S45)	#955-000-026 (S46)
300, 301 LA pre-1973 F/ext.	#955-000-025 (S45)	#955-000-081 (S402)
300, 301 long action post-1973	NA	#955-000-026 (S46)
300, 301 LA post-1973 F/ext.	NA	#955-000-081 (S402)
HERTER'S U-9 round receiver	#955-000-024 (S36)	#955-000-023 (S35)
U-9 round receiver, F/ext.	#955-000-024 (S36)	NA
J-9 & FN action	#955-000-025 (S45)	#955-000-026 (S46)
J-9 & FN action, F/extension	#955-000-025 (S45)	#955-000-081 (S402)
HIGH STANDARD Hi-Power	NA	#955-000-026 (S46)
HOWA 1500	#955-000-024 (S36)	#955-000-023 (S35)
1500, F/extension	#955-000-024 (S36)	NA
ITHACA LSA-55, LSA-65	#955-000-033 (S61)	#955-000-033 (S61)
KNIGHT MK 85, BK-92, T-Bolt	#955-000-033 (S61)	#955-000-033 (S61)
LK-93, Wolverine, Legend, Disc	#955-000-025 (S45)	#955-000-025 (S45)

RIFLE MODEL	STK# REAR	STK# FRONT
MARLIN 9, 36, 45, 62, 93, 336, 375, 444, 1893, 1894, 1895, Camp Carbine, 922M, 989, Glenfield 30	#955-000-072 (S466)	#955-000-072 (S466)
MR7	NA	#955-000-026 (S46)
455	#955-000-025 (S45)	#955-000-026 (S46)
MAUSER FN, HVA, Model 98 large ring	#955-000-025 (S45)	#955-000-026 (S46)
Model 98 F/ext.	#955-000-025 (S45)	#955-000-081 (S402)
HVA, Swedish 96 small ring	NA	#955-000-026 (S46)
Model 95, 96 F/ext.	NA	#955-000-081 (S402)
1500, 1550, 1700	#955-000-024 (S36)	#955-000-023 (S35)
1500, 1550, 1700 F/ext.	#955-000-024 (S36)	NA
MUSGRAVE Mark I, Mark II	NA	#955-000-026 (S46)
Mark I, II F/extension	NA	#955-000-081 (S402)
Mark III, Mark IV	#955-000-025 (S45)	#955-000-026 (S46)
Mark III, IV F/extension	#955-000-025 (S45)	#955-000-081 (S402)
NAVY ARMS Country Boy	#955-000-026 (S46)	#955-000-026 (S46)
PARKER HALE 1000, 1000C, 1100, 1200, 1700	#955-000-025 (S45)	#955-000-026 (S46)
RAPTOR ARMS 700 action	#955-000-024 (S36)	#955-000-023 (S35)
700 action F/ext.	#955-000-024 (S36)	NA
REMINGTON 700 long action, 78, 40-XL, 721, 725	#955-000-024 (S36)	#955-000-023 (S35)
700 short action, 700 ML	#955-000-024 (S36)	#955-000-023 (S35)
700 LA/SA, 700 ML F/ext.	#955-000-024 (S36)	NA
SAKO Whitetail Hunter	#955-000-033 (S61)	#955-000-033 (S61)
SAUER 200	#955-000-023 (S35)	#955-000-023 (S35)
SAVAGE 110, 116, 10, 11, 12	#955-000-033 (S61)	#955-000-026 (S46)
10 & 110 series F/extension	#955-000-033 (S61)	#955-000-081 (S402)
SEARS 50, 51 FN action	#955-000-025 (S45)	#955-000-026 (S46)
51L	NA	#955-000-026 (S46)
53	NA	#955-000-026 (S46)
SHILEN flat top receiver round receiver	#955-000-033 (S61)	#955-000-033 (S61)
round receiver	#955-000-023 (S35)	#955-000-023 (S35)
SMITH & WESSON Mauser action	NA	#955-000-026 (S46)
Mauser action 1500, 1600	#955-000-024 (S36)	#955-000-023 (S35)
1700, 1500, 1600, 1700 F/ext.	#955-000-024 (S36)	NA
STEVENS 110E	#955-000-033 (S61)	#955-000-026 (S46)
TIKKA flat receiver	#955-000-033 (S61)	#955-000-033 (S61)
VOERE 2150, 2165, Mauser action	#955-000-025 (S45)	#955-000-026 (S46)
Mauser action F/extension	#955-000-025 (S45)	#955-000-081 (S402)
WEATHERBY Mark V, Vanguard	#955-000-024 (S36)	#955-000-023 (S35)
Mark V, Vanguard F/ext	#955-000-024 (S36)	NA
Mark V 22-250, 224, 30-06	#955-000-024 (S36)	#955-000-026 (S46)
WINCHESTER 70 long and short action, H&H mags above #1,896,476	NA	#955-000-026 (S46)
70 long and short action, H&H mags above #1,896,476; 70 Target, H&H mags up to #1,896,476	NA	#955-000-026 (S46)
52 hole spacing same	#955-000-026 (S46)	#955-000-026 (S46)
670, 770	NA	#955-000-026 (S46)

— Advise # — Grand Slam Base, 5E13Q29. . . . . \$ 13.99

WEAVER

SIDE MOUNT 1" RINGS & BASE



Short Shown

For Bolt & Ejection Clearance

One-piece rings and sub-base mount scope to side of receiver to provide clearance for bolt handles, easier loading and ejection. Long and Short ring mounts give correct spacing for compact or large scopes. Bases accept Weaver Side

Mount rings ONLY (listed below). **USA**

SPECS: Rings - Sub-base, aluminum, anodized, black; steel ring cap, black. Distance between rings: Long - 3.7" (9.3cm), Short - 1.8" (4.7cm), Base - Aluminum, black, anodized finish.

- #955-010-103 3B Side Mount Base, 5E00QIH . . . . . \$ 15.99
- #955-493-103 1" Short Side Mnt Ring, 5E00AVK . . . . . 30.99
- #955-493-303 1" Long Side Mnt Ring, 5E00JG . . . . . 39.99

SIDE MOUNT BASES

STOCK #	RIFLE MODEL
#955-010-001	ANSCHUTZ 1568 (1)
#955-010-001	CARCANO military action (1)
#955-010-001	CIL 830 & 950, 950C (1)
#955-010-002	COOEY 60, 600 (2)
#955-010-001	Model 71 (1)
#955-010-001	ENFIELD P 14/17 receiver cut like Remington 30 (1)
#955-010-002	H&R Models 65, 165, 150, 151, 250, 251, 264, 265, 365, 450, 550, 755, 765, 852 (2)
#955-010-001	HIGH STANDARD Mauser action (1)
#955-010-001	JAPANESE Arisaka 6.5mm & 7.7mm (1)
#955-010-002	KRAG (2)
#955-010-002	MARLIN A1, 50, 39A round barrel, 80, 81, 88, 89, 98 (2)
#955-010-001	MAUSER Models ZB, HVA Husqvarna w/rec. ring 1.3" dia. (1)
#955-010-002	MOSSBERG 25, 26, 35, 40, 42, 43, 44, 45, 46, 46A, 46B, 46M, 140, 142, 144, 146, 468T (2)
#955-010-001	REMINGTON 7, 30, 700, 40-X, 600, 660, 721, 722 (1)
#955-010-002	Mod. 10, 11, 12, 12A, 25, 33, 34, 41, 121, 341, 5135, 513T, 514 (2)
#955-010-001	SAVAGE 20, 110, 111, 112, 116, 340, 342, 840, 842 (1)
#955-010-002	Models 3, 4, 5, 6, 7, 19, 23, 40, 45, 219 (2)
#955-010-001	SCHULTZ & LARSEN (1)
#955-010-001	SEARS Models 51L, 53 (1)
#955-010-103	Model 94 post-'64 (3B)
#955-010-001	SMITH & WESSON Mauser actions (1)
#955-010-001	SPRINGFIELD '03 (1)
#955-010-001	STEVENS 110E, 325, 322 (1)
#955-010-002	Models 26, 53, 56, 57, 66, 76, 85, 416, 417, 418, 762, 872 (2)
#955-010-001	STEVENS-SPRINGFIELD 840 (1)
#955-010-002	Models 83, 872 (2)
#955-010-001	WINCHESTER 54, 70 LA/SA, 670, 770 (1)
#955-010-103	Model 94 post-'64 (3B)
#955-010-002	Models 03, 47, 52, 57, 61, 63, 69, 69A, 72, 74, 75, 77 (2)
#955-010-002	Model 42 pump shotgun (2)
#955-010-002	ZB 22 (2)

— Advise # — 1, 2, 10M Base, 5E16P19. . . . . \$ 16.99

WEAVER WINDAGE ADJUSTABLE SURE-GRIP RINGS



Completely Adjustable, High-Strength Clamping Power

High-quality, windage adjustable rings feature steel caps with two hardened screws per side allow super strong clamping power and positive grip on your scopes. Both front and rear rings come with two fully adjustable base clamps that mount securely to Weaver-style rails with a unique, one-piece lug milled into the base of each ring. Clamps can be tightened or loosened for both front and rear alignment so you can line your scope up perfectly with the end of the barrel leaving the windage adjustment in your scope for precise sighting-in. **USA**  
 SPECS: Aluminum lower; steel cap, 4 screws, windage adjustment clamps. Allen wrench included. Black, gloss or matte finish. 1" (2.5cm) diameter. Heights measured from top of base to bottom of ring. Med., 180" (5cm); High, 350" (8cm); X-High, 575" (15cm).

STOCK #	HEIGHT	FINISH	SIZE	PRICE
#955-000-112	Med.	Matte	1"	5E28A49 \$ 29.99
#955-000-114	High	Matte	1"	5E28M49 \$ 29.99
#955-000-116	X-High	Matte	1"	5E28D49 \$ 29.99

WINDAGE ADJUSTABLE GRAND SLAM RINGS - Strong, all-steel rings clamp securely to Weaver-style rails and two Torx® screws hold your scope rigidly in place. Windage adjustable ring bases allow for increased left to right positioning on front and rear alignment of rings and scopes while leaving the windage adjustment on the scope for accurate fine-tuning at the range. Rings also allow for perfect return to zero when remounting scopes.  
 SPECS: Steel, blued, matte finish. 1" (2.5cm) diameter. Heights measured from top of base to bottom of ring. Med., 180" (5cm); High, 350" (8cm); X-High, 575" (15cm). Torx wrench included.

- #955-000-099 Rings, Med, 1", Matte Blue, 5E29J49. . . . . \$ 30.99
- #955-000-100 Rings, High, 1", Matte Blue, 5E00BLS. . . . . 29.99
- #955-000-101 Rings, X-High, 1", Matte Blue, 5E29G49. . . . . 30.99

SCOPE BASE SHIMS

Achieve Perfect Scope Base & Ring Alignment



Three thicknesses down to an incredible .001", so front-to-rear base heights can be made absolutely perfect. **USA**  
 SPECS: Steel. All are .625" (15.9mm) wide. Package contains 7 shims: (4) .010" (.254mm); (1) .005" (.127mm); and (2) .001" (.0254mm) thick shims. .560"- .600" - .201" (5.1mm) diameter holes. Fits .560" (.14.2mm) to .600" (15.2mm) hole spacings. .860" - .153" (3.9mm) diameter holes. Fits .860" (.21.8mm) hole spacings.

- #396-100-505 .560"- .600" Shims, 6C7Q60. . . . . \$ 11.99
- #396-100-860 .860" Shims, 6C7L88. . . . . 11.99



JP ENTERPRISES AR-15/M16 45° OFFSET ADAPTER

Accepts Tactical Sights & Micro-Red Dots For Fast Targeting


Machined aluminum mount allows simple, no-gunsmith mounting of iron or micro red dot sights at a 45° position in line with your rifle's bore. Helps improve your short-range speed-shooting without changing your optics. The offset position keeps your tactical sights from interfering with your main optic but keeps them easily accessible by simply tilting your rifle to the side without changing your head position. Mount attaches easily to all Picatinny rails on rifle receiver or handguard. Fully reversible for right- or left-handed shooters. **USA**  
 SPECS: 6061 aluminum, hard anodized coating, black. 1 1/4" (3.1cm) long, 1 3/4" (4.4cm) wide, 7.7 oz. (209g) wt. Fits MIL-STD 1913 Picatinny rails only.  
 #100-008-905 JP 45° Offset Adapter, 2E54E14. . . . . \$ 56.95





# OTS-XLT SERIES

Thermal Monocular

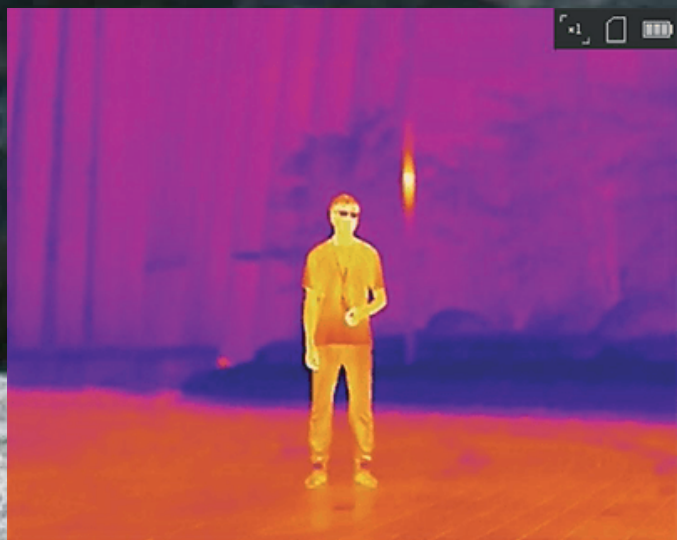

RECORD  
VIDEO



HEAT  
TRACKING



LIGHT  
WEIGHT



UP TO  
10+HRS



COLOR  
MODES

STARTING AT  
**\$599**



**WEAVER SURE-GRIP RINGS**



Give Uniform High-Strength Clamping Power

Steel caps with two screws per side provide extra strong, 4-screw, clamping power. Helps ensure that reticle stays square while tightening top screws.

Large clamp nut locks rings to base, provides easy scope installation, removal; and accurate return to zero after re-installation. **SPECS:** Aluminum lower; steel cap, screws, crossbolt and nut. Black, gloss or matte finish. Heights (above base): 1" (2.5cm) dia-meter - Med., .164" (4.16mm); High, .332" (8.43mm); X-High, .560" (14.2mm).

STOCK #	HEIGHT	FINISH	SIZE	PRICE
#955-000-007	Med.	Gloss	1"	5E25E69 \$ 26.99
#955-000-008	Med.	Matte	1"	5E25H69 \$ 26.99
#955-000-009	High	Gloss	1"	5E25M69 \$ 26.99
#955-000-010	High	Matte	1"	5E25I69 \$ 26.99
#955-000-011	X-High	Gloss	1"	5E25N69 \$ 26.99
#955-000-012	X-High	Matte	1"	5E25K69 \$ 26.99

**ATLAS METAL PRODUCTS PICATINNY BASE STOCK**



Create Custom Accessory & Optics Bases For Tactical & Sporting Applications

Six inch and twelve inch long, aluminum stock has a wide, flat base that lets you create unique mounts to fit any application. Precision machined cross slots accept Picatinny-spec optical sights, night vision devices and other accessories, plus Picatinny and separate, Weaver-style rings for scope mounting. **SPECS:** 6061 aluminum, black anodized. .394" (10mm) slot spacing. 5.7" (14.2cm) or 12" (30.4cm) long. 1" (2.5cm) wide, 1/8" (16mm) high base.

#100-000-682 5.7" Picatinny Base Stock, 7K29C44... \$ 30.99  
#100-000-804 12" Picatinny Base Stock, 7K58D89... 61.99

**BROWNELLS STEEL SHIM STOCK**



Solves Most "Need A Little More Metal" Problems

For scope base adjustment, sight adjustment, head-space adjustment and checking, restoration of misaligned parts ordering on for build-up, inletting templates, spacers. You name it, and somewhere along the line a shim can be used for everything from shimming, to measuring, to fixing!

**KIT NO. AC-24** - consists of one piece, each, steel shim stock, 2 1/2" x 6" in the following thicknesses: .001".002".003".005".010".015"  
#080-544-024 AC-24 Steel Shim Stk Kit, 8K19F99... \$ 19.99  
**KIT NO. AF-12** - consists of one piece, each, steel shim stock, 6" x 12" in the following thicknesses: .001".0015".002".003".004".005".006".007".008".010".012".015"  
#080-544-012 AF-12 Steel Shim Stk Kit, 5A55E31... \$ 62.99

**WEAVER SEE-THRU MOUNTS**



Integral Mount Lets You Use Both Iron Sight & Scope

Wide oval opening below the scope allows fast, unrestricted use of iron sights when you're too close to use a scope. All-steel, four screw top strap gives 210° surface contact for recoil-proof strength. Integral aluminum base means lighter weight. Front and rear mounts interchange for greater eye relief. **SPECS:** Aluminum lower half, steel top straps and screws. Satin blue finish. 1" (2.5cm) I.D. Overall height approx. 2" (5.1cm). 3 oz. (85 g) wt. per pair.

STOCK #	FITS	PRICE
#955-401-713	Marlin 336	5E00ISG \$ 19.99
#955-401-714	Rem. 4, 6, 7400, 7600	5E00MNE \$ 19.99

**BROWNELLS SCOPE SHIM KIT**

Have The Right Shim, Right At Your Fingertips



An economical and practical kit that provides a complete selection of scope shims. When "just a little more" height is needed for perfect scope base and ring alignment.

**SPECS:** Steel, blued. Kit contains 10 of each hole spacing and thickness (80 total). Available in .600" (15.2mm) and .860" (21.8mm) c-to-c hole spacing and .006" (.152mm), .008" (.203mm), .010" (.254mm), .012" (.304mm) thickness. Refills sold 10 per pak.


#080-814-000 Scope Shim Kit, 8K107Q49... \$ 119.99

STOCK #	SIZE	STOCK #	SIZE
#080-814-606	.600" x .006"	#080-814-806	.860" x .006"
#080-814-608	.600" x .008"	#080-814-808	.860" x .008"
#080-814-610	.600" x .010"	#080-814-810	.860" x .010"
#080-814-612	.600" x .012"	#080-814-812	.860" x .012"

— Advise # — Shim Refill Pak, 8K13199... \$ 13.99

**MOUNTING SOLUTIONS PICATINNY RAIL BLANK**

For Custom Mounting Of Accessories & Optics



CNC machined to true Picatinny dimensions, these cut-to-length blanks provide unlimited accessory or scope mounting options for custom applications. Bases are left undrilled for fitting to guns with non-standard hole spacing or those needing special ring positioning. Precision crossslots easily accept Picatinny or Weaver-style accessories and scope rings. Open top design reduces weight without sacrificing strength. Available in 5 1/8", 9", and 18" lengths.

**SPECS:** 6061 T6 aluminum, natural, matte finish. 5 1/8" (14.3cm), 9" (22.8cm), or 18" (45.7cm) long. .206" (10mm) slot width, 1/8" (1.59cm) high from top of receiver to bottom of dovetail. Mounting holes not drilled.  
#100-003-790 5 1/8" Rail Blank, 1K27H89... \$ 30.99  
#100-003-789 9" Rail Blank, 1K44F09... 48.99  
#100-003-788 18" Rail Blank, 1K69J29... 76.99

**POWER CUSTOM BLANK SCOPE RING BASE STOCK**

Weaver-Style Or Picatinny Profile; Ready To Machine For Custom Installations



Blank aluminum stock has a milled center channel for lighter weight without reducing strength. Just cut to required length, mill the cross slots, radius the underside (if needed) and drill the mounting holes. Plenty of thickness allows machining to fit most revolver top straps and receivers. Available in Weaver and Picatinny profiles. **SPECS:** 6061 T6 aluminum, unfinished. Weaver - 9" (22.8cm) long x 1/8" (14.3mm) thick. Picatinny - 18" (45.7cm) x 1/8" (1.59cm) thick.

#713-065-009 9" Weaver Scope Ring Base Stock, 3A13G49... \$ 14.99  
#713-000-112 18" Picatinny Scope Ring Base, 3A23H39... 25.99

**WEAVER SEE-THRU MOUNT RINGS**

For Weaver Bases

Extra wide, oval design for instant use of either iron sights or scope. Standard See-Thru or Extension style that adds approximately 1/4" (19mm) eye relief adjustment. Fit Weaver Top Mount Bases. Excellent for mounting large objective diameter scopes, too.



**SPECS:** Steel, satin blue (SB) or matte blue (MB) finish. For 1" (2.5cm) scopes. Sold in pairs.

#955-495-100 See-Thru Rings (SB), 5E00LQO... \$ 24.99  
#955-495-230 See-Thru Rings (MB), 5E24F69... 25.99  
#955-495-500 Ext. See-Thru Rings (SB), 5E27J89... 30.99  
#955-495-101 Ext. See-Thru Rings (MB), 5E00MLP... 30.99



**WILCOX INDUSTRIES COMP-M MOUNT**

Strong, Lightweight, Tactical Mount For Secure Attachment Of Comp Series Sights

Compact tactical mount securely positions an Aimpoint red dot optic the correct height above a flattop receiver rail. Fits Aimpoint CompC3/M2/ML2/M3/ML3 series, 3XMAG magnifier, and other optics with 30mm tube that require single-ring mounting. Skeletonized construction provides full support without the weight of excess metal for an exceptionally strong, solid, yet lightweight mount. Four, steel, hex-head cap screws anchor the top ring half to the mount to ensure full contact with sight body to prevent slippage. Rail Grabber clamping system secures the mount to receiver and maintains sight alignment even under the battering of sustained rapid fire. Unique, captive cross-bolt is divided lengthwise; one side provides a slop-free fit in a MIL-STD 1913 Picatinny slot, while rotating the bolt a half turn exposes the side that snugly fits the narrower Weaver-type slot. An oversized thumb nut with deep grasping grooves lets the operator tighten the mount with hand pressure only; coin slot in the head lets you apply additional tightening force with a U.S. nickel or quarter. **SPECS:** Aluminum, hardcoat anodized, matte black finish. Height measured from top of rail to bottom of scope tube: 1.120" (2.84cm). 3.1 oz. (88g) weight. Fits Aimpoint CompC3/M2/ML2/M3/ML3, 3XMAG magnifier, and other optics that require a single 30mm ring mount.

#100-004-257 Comp-M Mount, 4B00DQD... \$ 172.85

**EGW PICATINNY BASE STOCK**



Build A Custom Base In Steel Or Aluminum; Pre-Cut Slots Speed The Job

Scope base stock is machined to MIL STD 1913 Picatinny dimensions for fabricating custom rifle or handgun optic bases. Pre-cut cross-slots speed the job and allow use of any Picatinny scope rings. Ideal for quickly building a versatile base for a gun with non-standard hole spacing, rather than drilling new holes in the receiver. Available in pre-hardened steel or aluminum, both with a matte black finish. Bottom of the base is flat, so it can be radius cut to fit any receiver contour. **SPECS:** 4140 pre-hardened steel, blued, or 7075 T6 aluminum, hardcoat anodized, matte black. 7 1/2" (19.7cm) long, 1" (2.5cm) wide base, 1/4" (1.9cm) high.  
#296-000-144 Steel Picatinny Rail Stock, 6B00KNR... \$ 63.00  
#296-000-145 Aluminum Picatinny Rail Stock, 6B00LVH... 54.00

**BROWNELLS DELRIN® RING REDUCERS**



Make Big Rings Accept Small Scopes

Non-marring, Delrin sleeves surround scopes to adapt them to fit bigger-diameter rings. Black, matte finish won't clash with your scope or gun. Reducers are sliced in half for easy, dropon installation onto virtually any brand of rings in the sizes listed below. Sold as front-and-rear-ring sets. **SPECS:** Kit includes front and rear reducer sets. Delrin, matte, black finish.  
#084-000-091 30mm To 1" Ring Rdcrs, 8K11E99... \$ 14.99  
#084-000-092 1" To 1/8" Ring Reducers, 8K11M99... 14.99  
#084-000-093 1" To 1/4" Ring Reducers, 8K11H99... 14.99  
#084-000-094 30mm To 26mm Reducers, 8K11J99... 14.99

**BROWNELLS Gift Cards & eGift Cards**



When you don't know which of our many unique items to give, give a Brownells Gift Card or eGift Card. Call or order online to take advantage of the many delivery options. You'll be giving exactly what your favorite gun "tinkerer" wants.

#080-000-816 Brownells Gift Card, 4S00PZM... \$ .00  
#080-000-818 Brownells E-Mail Gift Card, 8K00CYR... .00

Call or Order at [brownells.com](http://brownells.com)

**GUARANTEED. FOREVER.® SINCE 1939**